
TRAFFIC CONTROL AND PROTECTION FOR NOTES: A FOR NO LANE RESTRICTION ON THE SIDE ROAD OR DRIVEWAYS SHOW NO THE ORAWING AND AS DIRECTED BY THE ENCIRENT ONE ROAD WITH A SPEED LIMIT OF 40 MPH (60 km/h) OR LESS AS SHOW NO THE DRAWING AND AS DIRECTED BY THE ENCIRENT ONE ROAD CONSTRUCTION AFFAD SION 36 x 36 (900x900) WITH A FLASHER AND FLAG MOUNTED ON IT APPROXIMATELY 200' (60 m) IN ADVANCE OF THE MAIN ROUTE. DIDECKING WITH TA SPEED LIMIT GREATER THAN 40 MPH (60 km/h) AD THE DRAWING AND AS DIRECTED BY THE ENCIRENT OF THE MAIN ROUTE. DIDECKING WITH THE SIDE ROAD OF THE WAIN ROUTE SHALL BE PROTECTED BY BUCKING WITH THE SPEED LIMIT GREATER THAN 40 MPH (60 km/h) AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENCIRENT OF THE MAIN ROUTE. DIDECKING WITH THE SPEED LIMIT GREATER THAN 40 MPH (60 km/h) AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENCIRENT OF THE MAIN ROUTE. DIDECKING WITH THE SPEED LIMIT GREATER THAN 40 MPH (60 km/h) AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENCIRENT OF THE MAIN ROUTE. DIDECKING WITH THE FILL OF THE MAIN ROUTE SHALL BE PROTECTED BY ILES OF THE MAIN ROUTE. DIDECKING WITH THE PRAWING AND AS DIRECTED BY THE ENCIRENT OF THE MAIN ROUTE. DIDECKING WITH THE PRAWING AND AS DIRECTED BY THE ENCIRENT DIDECKING WITH THY EII BARRICADES, 1/2 OF THE CROSS SECTION OF THE CLOSED PORTION. SHOWN THE SIDE ROAD LIES BETWEEN THE BEGINNING OF THE MAINLINE SIGNING AND THE WORK ZONG. A SINCLE HEADED ARROW (MG-10) SHALL BE USED IN LIEU OF THE DOUBLE HEADED ARROW (MG-4).	
 NOTES: A. FOR NO LANE RESTRICTION ON THE SIDE ROAD OR DRIVEWAYS 1. SIDE ROAD WITH A SPEED LIMIT OF 40 MPH (60 km/h) OR LESS AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER: O) ONE ROAD CONSTRUCTION AHEAD SIGN 36 × 36 (900×900) WITH A FLASHER AND FLAG MOUNTED ON IT APPROXIMATELY 200' (60 m) IN ADVANCE OF THE MAIN ROUTE. b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE I, TYPE II OR TYPE III BARRICADES, 1/3 OF THE CROSS SECTION OF THE CLOSED PORTION. 2. SIDE ROAD WITH A SPEED LIMIT GREATER THAN 40 MPH (60 km/h) AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER: o) ONE ROAD CONSTRUCTION AHEAD SIGN 48 × 48 (1.2 m × 1.2 m) WITH A FLASHER MOUNTED ON IT APPROXIMATELY 500' (150 m) IN ADVANCE OF THE MAIN ROUTE. b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE III BARRICADES, 1/2 OF THE CROSS SECTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE III BARRICADES, 1/2 OF THE CROSS SECTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE III BARRICADES, 1/2 OF THE CROSS SECTION OF THE CLOSED PORTION. 3. WHEN THE SIDE ROAD LIES BETWEEN THE BEGINNING OF THE MAINLINE SIGNING AND THE WORK ZONE, A SINGLE HEADED ARROW (M6-1) SHALL 	ROAD CONSTRUCTION
 A. FOR NO LANE RESTRICTION ON THE SIDE ROAD OR DRIVEWAYS A. FOR NO LANE RESTRICTION ON THE SIDE ROAD OR DRIVEWAYS I. SIDE ROAD WITH A SPEED LIMIT OF 40 MPH (60 km/h) OR LESS AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER: O) ONE ROAD CONSTRUCTION AHEAD SIGN 36 × 36 (900×900) WITH A FLASHER AND FLAG MOUNTED ON IT APPROXIMATELY 200' (60 m) IN ADVANCE OF THE MAIN ROUTE. D) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE I, TYPE II OR TYPE III BARRICADES, 1/3 OF THE CROSS SECTION OF THE CLOSED PORTION. 2. SIDE ROAD WITH A SPEED LIMIT GREATER THAN 40 MPH (60 km/h) AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER: O) ONE ROAD CONSTRUCTION AHEAD SIGN 48 × 48 (1.2 m × 1.2 m) WITH A FLASHER MOUNTED ON IT APPROXIMATELY 500' (150 m) IN ADVANCE OF THE MAIN ROUTE. D) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE III BARRICADES, 1/2 OF THE CROSS SECTION OF THE CLOSED PORTION. 3. WHEN THE SIDE ROAD LIES BETWEEN THE BEGINNING OF THE MAINLINE SIGNING AND THE WORK ZONE, A SINGLE HEADED ARROW (M6-1) SHALL 	TRAFFIC CONTROL AND PROTECTION FOR
 1. SIDE ROAD WITH A SPEED LIMIT OF 40 MPH (60 km/h) OR LESS AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER: o) ONE ROAD CONSTRUCTION AHEAD SIGN 36 × 36 (900×900) WITH A FLASHER AND FLAG MOUNTED ON IT APPROXIMATELY 200' (60 m) IN ADVANCE OF THE MAIN ROUTE. b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE I, TYPE II OR TYPE III BARRICADES, 1/3 OF THE CROSS SECTION OF THE CLOSED PORTION. 2. SIDE ROAD WITH A SPEED LIMIT GREATER THAN 40 MPH (60 km/h) AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER: o) ONE ROAD CONSTRUCTION AHEAD SIGN 48 × 48 (1.2 m × 1.2 m) WITH A FLASHER MOUNTED ON IT APPROXIMATELY 500' (150 m) IN ADVANCE OF THE MAIN ROUTE. b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE III BARRICADES, 1/2 OF THE CROSS SECTION OF THE CLOSED PORTION. 3. WHEN THE SIDE ROAD LIES BETWEEN THE BEGINNING OF THE MAINLINE SIGNING AND THE WORK ZONE, A SINGLE HEADED ARROW (M6-1) SHALL 	
 o) ONE ROAD CONSTRUCTION AHEAD SIGN 36 × 36 (900×900) WITH A FLASHER AND FLAG MOUNTED ON IT APPROXIMATELY 200' (60 m) IN ADVANCE OF THE MAIN ROUTE. b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE I, TYPE II OR TYPE III BARRICADES, 1/3 OF THE CROSS SECTION OF THE CLOSED PORTION. 2. SIDE ROAD WITH A SPEED LIMIT GREATER THAN 40 MPH (60 km/h) AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER: d) ONE ROAD CONSTRUCTION AHEAD SIGN 48 × 48 (1.2 m × 1.2 m) WITH A FLASHER MOUNTED ON IT APPROXIMATELY 500' (150 m) IN ADVANCE OF THE MAIN ROUTE. b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE III BARRICADES, 1/2 OF THE CROSS SECTION OF THE CLOSED PORTION. 3. WHEN THE SIDE ROAD LIES BETWEEN THE BEGINNING OF THE MAINLINE SIGNING AND THE WORK ZONE, A SINGLE HEADED ARROW (M6-1) SHALL 	. SIDE ROAD WITH A SPEED LIMIT OF 40 MPH (60 km/h) OR LESS AS
 b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE I, TYPE II OR TYPE III BARRICADES, 1/3 OF THE CROSS SECTION OF THE CLOSED PORTION. 2. SIDE ROAD WITH A SPEED LIMIT GREATER THAN 40 MPH (60 km/h) AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER: d) ONE ROAD CONSTRUCTION AHEAD SIGN 48 × 48 (1.2 m × 1.2 m) WITH A FLASHER MOUNTED ON IT APPROXIMATELY 500' (150 m) IN ADVANCE OF THE MAIN ROUTE. b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE III BARRICADES, 1/2 OF THE CROSS SECTION OF THE CLOSED PORTION. 3. WHEN THE SIDE ROAD LIES BETWEEN THE BEGINNING OF THE MAINLINE SIGNING AND THE WORK ZONE, A SINGLE HEADED ARROW (MG-1) SHALL 	Q) ONE ROAD CONSTRUCTION AHEAD SIGN 36 × 36 (900×900) WITH A FLASHER AND FLAG MOUNTED ON IT APPROXIMATELY 200' (60 m) IN ADVANCE
 AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER: O) ONE ROAD CONSTRUCTION AHEAD SIGN 48 × 48 (1.2 m × 1.2 m) WITH A FLASHER MOUNTED ON IT APPROXIMATELY 500' (150 m) IN ADVANCE OF THE MAIN ROUTE. b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE III BARRICADES, 1/2 OF THE CROSS SECTION OF THE CLOSED PORTION. 3. WHEN THE SIDE ROAD LIES BETWEEN THE BEGINNING OF THE MAINLINE SIGNING AND THE WORK ZONE, A SINGLE HEADED ARROW (M6-1) SHALL 	b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE I, TYPE II OR TYPE III BARRICADES, 1/3 OF
 FLASHER MOUNTED ON IT APPROXIMATELY 500' (150 m) IN ADVANCE OF THE MAIN ROUTE. b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE III BARRICADES, 1/2 OF THE CROSS SECTION OF THE CLOSED PORTION. 3. WHEN THE SIDE ROAD LIES BETWEEN THE BEGINNING OF THE MAINLINE SIGNING AND THE WORK ZONE, A SINGLE HEADED ARROW (M6-1) SHALL 	
BLOCKING WITH TYPE III BARRICADES, 1/2 OF THE CROSS SECTION OF THE CLOSED PORTION. 3. WHEN THE SIDE ROAD LIES BETWEEN THE BEGINNING OF THE MAINLINE SIGNING AND THE WORK ZONE, A SINGLE HEADED ARROW (MG-1) SHALL	FLASHER MOUNTED ON IT APPROXIMATELY 500' (150 m) IN ADVANCE
SIGNING AND THE WORK ZONE, A SINGLE HEADED ARROW (M6-1) SHALL	BLOCKING WITH TYPE III BARRICADES, 1/2 OF THE CROSS SECTION
	3. WHEN THE SIDE ROAD LIES BETWEEN THE BEGINNING OF THE MAINLINE SIGNING AND THE WORK ZONE, A SINGLE HEADED ARROW (MG-1) SHALL

FILE NAME =	USER NAME = reichenbachrl	DESIGNED - LHA	REVISED - J. OBERLE 10-18-95			TRAFFIC CONTROL AND PROTECTION FOR	F.A.I. RTF.	SECTION	COUNTY TOTAL SHEET SHEETS NO.
c:\pw_work\pwidot\reichenbachrl\d025182	3\DistStd.dgn	DRAWN -	REVISED - A. HOUSEH 03-06-96	STATE OF ILLINOIS	SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS 290 2010-156-RS DUPAGE TC-10 CONTRAC		2010-156-RS	DUPAGE 16 13	
	PLOT SCALE = 100.0000 '/ in.	CHECKED -	REVISED - A. HOUSEH 10-15-96	DEPARTMENT OF TRANSPORTATION			CONTRACT NO. 60N68		
	PLOT DATE = 12/12/2012	DATE - 06-89	REVISED -T. RAMMACHER 01-06-00		SCALE: NONE	SHEET NO. 1 OF 1 SHEETS STA. TO STA.	FED. ROAD	DIST. NO. 1 ILLINOIS FED.	AID PROJECT

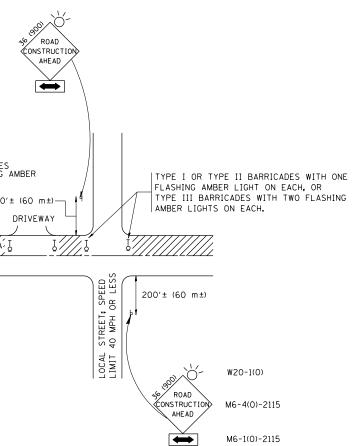

SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS

B. FOR A LANE CLOSURE ON A SIDE ROAD OR DRIVEWAY:
USE APPLICABLE PORTIONS OF THE TYPICAL APPLICATION OF TRAFFIC
CONTROL DEVICES (STD. 701501, STD. 701606 OR THE APPROPRIATE STANDARD).
THE SPACING OF SIGNS AND BARRICADES SHALL BE ADJUSTED FOR FIELD
CONDITIONS AS DIRECTED BY THE ENGINEER. THE DIRECTIONAL ARROW
SHALL BE COVERED OR REMOVED WHEN NO LONGER CONSISTENT WITH THE
SIDE ROAD LANE CLOSURE.

- C. ADVANCE WARNING SIGNS ARE TO BE OMITTED ON DRIVEWAY UNLESS OTHERWISE NOTED.
- D. THE TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS SHALL BE INCIDENTAL TO THE COST OF SPECIFIED TRAFFIC CONTROL STANDARDS OR ITEMS.

All dimensions are in millimeters (inches) unless otherwise shown.