


TYPICAL SECTION #2
 STA. 427+95.95 TO STA. 430+69.17

STATION EQUATION:
 STA. 430+69.17 (BK.) = STA. 0+00.00 (AHD.)

STA. 0+00 TO STA. 4+19.68
 STA. 5+34.68 TO STA. 11+98.44

EXISTING BITUMINOUS SHOULDER MILLING TO BE INCLUDED IN THE COSTS FOR "EXCAVATING AND GRADING EXISTING SHOULDER" AT DEPTH LABELED.

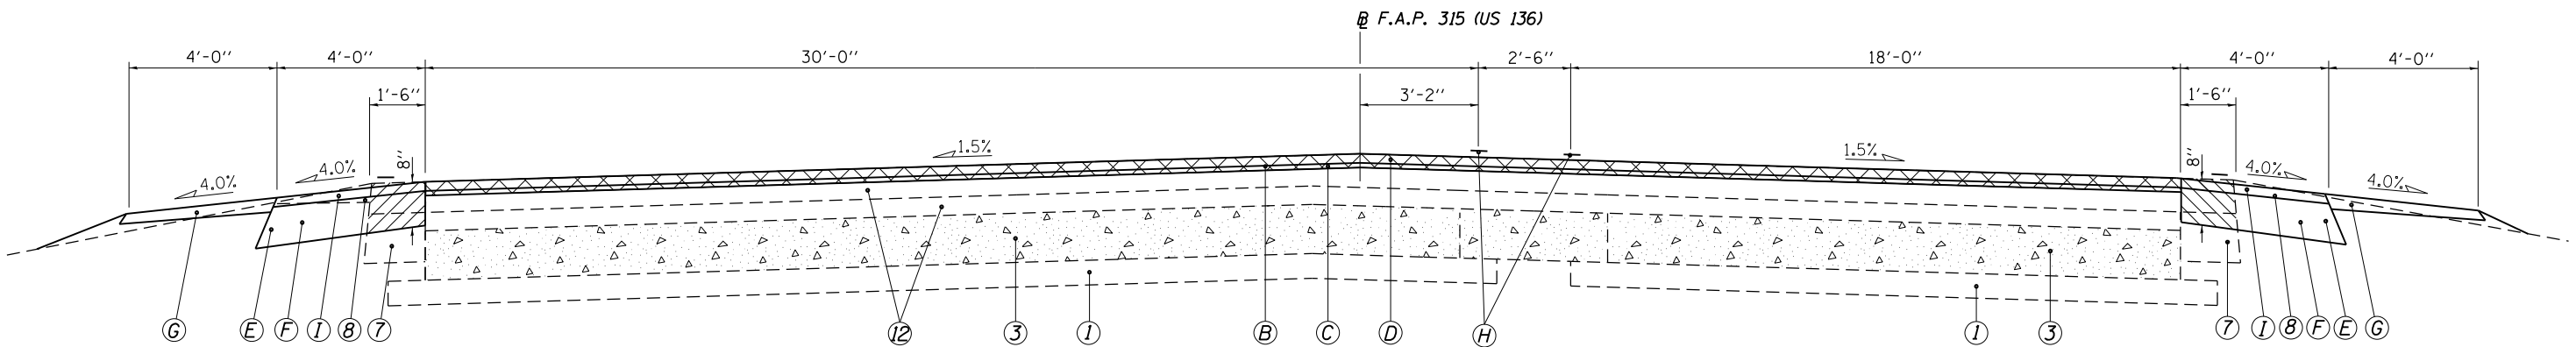

TYPICAL SECTION #3
 STA 4+19.68 TO STA. 5+34.68

EXISTING BITUMINOUS SHOULDER MILLING TO BE INCLUDED IN THE COSTS FOR "EXCAVATING AND GRADING EXISTING SHOULDER" AT DEPTH LABELED.

NOTES:
 MEDIAN AND LANE PAVEMENT MARKINGS NOT SHOWN
 SEE PAVEMENT MARKING DETAILS FOR LOCATIONS.
 SEE HIGHWAY STANDARD 6420006 FOR PLACEMENT OF PROPOSED SHOULDER RUMBLE STRIPS.

LEGEND

① EX. SUB-BASE GRANULAR MATERIAL 4"	(A) PROP. BITUMINOUS CONCRETE SURFACE REMOVAL, VARIABLE DEPTH (3/4" @ CENTERLINE)
② EX. P.C.C. PAVEMENT 9"-6"-9"	(B) PROP. BITUMINOUS CONCRETE SURFACE REMOVAL, 2 1/4"
③ EX. P.C.C. BASE COURSE 8"	(C) PROP. LEVELING BINDER (MACHINE METHOD), N70, 3/4"
⑦ EX. BITUMINOUS SHOULDER 8"	(D) PROP. HMA SURFACE COURSE, MIX C, N70, 1 1/2"
⑧ EX. AGGREGATE SHOULDERS, TYPE B	(E) PROP. HMA SHOULDERS, 6 1/2"
⑫ EX. BITUMINOUS OVERLAY, VARIABLE DEPTH	(F) PROP. EXCAVATING & GRADING SHOULDER (INCLUDES MILLING OUT EXISTING HMA SHOULDERS)
	(G) PROP. AGGREGATE WEDGE SHOULDER, TYPE B
	(H) PROP. PAVEMENT MARKING - LINE 5"
	(I) PROP. HMA SHOULDERS, 1 1/2" (MIX "C", N70)