


RIM ADJUSTMENT DETAIL

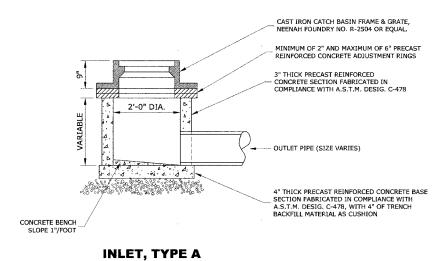


RIM ELEV. AS NOTED ON PLAN CAST IRON MANHOLE FRAME & GRATE, NEENAH FOUNDRY NO. R-2504-D OR EQUAL. WEIGHT (FRAME & GRATE) 303#. MINIMUM 2" PRECAST REINFORCED CONCRETE GRADE PRECAST REINFORCED CONCRETE TOP (SEE I.D.O.T. STANDARD 602601 FOR REINFORCEMENT) PRECAST REINFORCED CONCRETE SECTIONS
FABRICATED IN ACCORDANCE WITH A.S.T.M. DESIG.
C-478


PRECAST REINFORCED CONCRETE FLOOR FABRICATED IN ACCORDANCE WITH A.S.T.M. DESIG. C-478, WITH 4" SAND CUSHION

INVERT ELEV. AS INDICATED ON PLAN


RESTRICTED DEPTH CATCH BASIN




COMBINATION CONCRETE CURB & GUTTER TYPE B-6.12 (MODIFIED)



P.C.C. DRIVEWAY PAVEMENT DETAIL

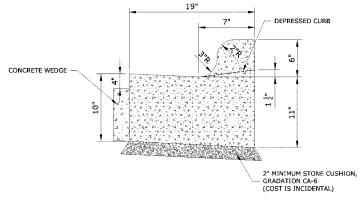

COMBINATION CONCRETE CURB & GUTTER TYPE B-6.12 (SPECIAL)

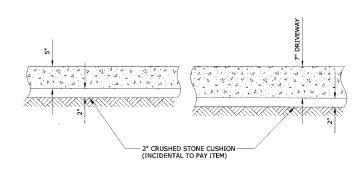

P.C.C. SIDEWALK



9933 Roosevelt Road er, Illinois 60154-2780 Fax: 708/865-1212

46th STREET RESURFACING PROJECT VILLAGE OF FOREST VIEW, ILLINOIS

DETAILS

RAWN BY: MK/DMM/LEV/TSG SDR33 11-1-06