


## ELECTRICAL SERVICE - PANEL DIAGRAM (TYPICAL FOR POLE AND GROUND MOUNTED SERVICE) SERVICE INSTALLATION POLE MOUNT (SHOWN)

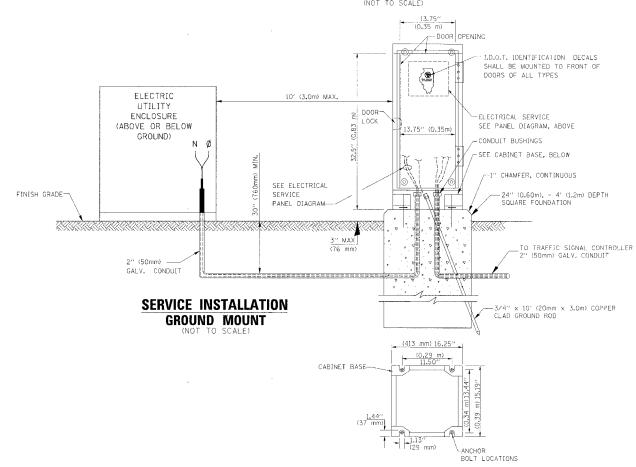

CABINET - BASE BOLT PATTERN

NOTES:

 
 F.A.U. RTE.
 SECTION
 COUNTY
 TOTAL SHEET
 SHEET NO.


 1488
 05-0016-00-RS
 COOK
 24
 20


PROJECT NO.: M-8003(571)

## GROUNDING SYSTEM

- 1. THE GROUNDING SYSTEM SHALL CONSIST OF AN INSULATED CONDUCTOR TYPE XLP, NO. 6 A.W.G., STRANDED COPPER TO BE INSTALLED IN RACEWAYS, THE GROUNDING CABLE SHALL BE INSTALLED

  IN A CONTINUOUS MANNER AS SHOWN ON THE CABLE PLAN PROVIDED,
  ALL GROUNDING CONDUCTORS SHALL BE BONDED TO METAL ENCLOSURE (HANDHOLE, POST, MAST ARM, CONTROLLER, ETC.), GROUND ROD SHALL BE
  3/4" DIA. × 10'-0" (20mm × 3.0m) LONG, COPPER CLAD, ONE GROUND ROD
  SHALL BE INSTALLED AT ALL POST FOUNDATIONS, POLE FOUNDATIONS,
  CONTROLLER CABINET FOUNDATION AND ELECTRICAL SERVICE INSTALLATION
  AS INDICATED ON THE CABLE PLAN. IF THERE ARE ANY SPECIAL CONDITIONS
  SUCH AS SUB-SURFACE CONDITIONS OR INSTALLATION PROBLEMS, THE RESIDENT
  ENGINEER SHALL BE NOTIFIED OR CONTACT THE BUREAU OF TRAFFIC,
  ILLINOIS DEPARTMENT OF TRANSPORTATION DISTRICT ONE AT
- THE NEUTRAL CONDUCTOR AND THE GROUND CONDUCTOR SHALL BE CONNECTED IN THE SERVICE INSTALLATION. AT NO OTHER POINT IN THE TRAFFIC SIGNAL SYSTEM SHALL THE NEUTRAL AND GROUND CONDUCTORS BE CONNECTED.
- $_{\rm 3.}$  ALL EQUIPMENT GROUNDING CONDUCTORS SHALL TERMINATE AT THE GROUND BUS IN THE CONTROLLER CABINET.
- 4. THE CONTRACTOR SHALL PROVIDE A GROUND CABLE WITH CONNECTORS BETWEEN THE HANDHOLE COVER AND HANDHOLE FRAME.








3/4" (20mm) HEAVY-DUTY GROUND ROD CLAMP (BURNDY TYPE GRC OR APPROVED EUAL)

## NOTES:

• ALL CLAMPS SHALL BE BRONZE OR COPPER, UL APPROVED.
• GROUND CABLE SHALL BE LOOPED OVER HOOKS IN THE HANDHOLES 6,5' (2,0m) SLACK SHALL BE PROVIDED IN SINGLE HANDHOLES 13' (4,0m) OF SLACK SHALL BE PROVIDED IN DOUBLE HANDHOLES. 5' (1,4m) OF SLACK SHALL BE PROVIDED BETWEEN FRAME AND COVER.

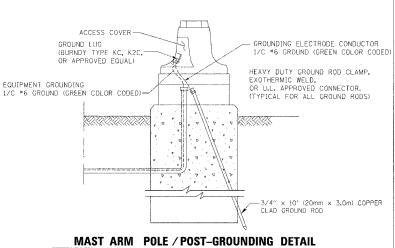

(NOT TO SCALE)		
REVISIONS NAME DA	E ILLINOIS DEPARTMENT OF	TRANSPORTATION
	DISTRICT 1	
	STANDARD TRAFFIC SIGNAL DESIGN DETAILS	
	SCALE: VERT. NONE HORIZ. DATE 1-01-02	DRAWN BY: RWP DESIGNED BY: DAD CHECKED BY: DAZ SHEET 3 OF 4

HANDHOLE COVER & FRAME - GROUNDING DETAIL

(NOT TO SCALE)

(GREEN)

► HANDHOLE COVER

DETAIL "A"

-HANDHOLE COVER

HANDLE

**DETAIL "B"** 

- RECESSED COVER

--U.L. LISTED

ROUND CARLES

DOUBLE HANDHOLE

TO POLE OR

POST AS REQ'D.

- SEE DETAIL "B"

CAST CORNER FRAME WEB-

ANTI-CORROSION COMPOUND
SHALL SE APPLIED ON ALL
BOLT/ CONNECTION ASSEMBLIES.
-STAINLESS STEEL NUT AND 2 STAINLESS
STEEL WASHERS

SEE DETAIL "A"

CABLE HOOKS

REQUIRED, ALL HANDHOLES UL LISTED GROUND COMPRESSION CONNECTOR

UL LISTED GROUND

WITH STAINLESS STEEL NU

(2) 1/2" x 1 1/4" STAINLESS STEEL BO\_T WITH SPLIT LOCK
WASHER AND NYLON INSERT LOCKOUT WELDED TO
FRAME AND TO COVER. (TYPICAL)

HEAVY DUTY COPPER COMPRESSION
GROUNDING TERMINAL. (TYPICAL)

EXISTING HANDHOLE
FRAME AND COVER (PAID FOR SEPARATELY)

EXISTING HANDHOLE COVER & FRAME - GROUNDING DETAIL

(NOT TO SCALE)

170172006