CONTRACT NO. 93544

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
7982	*	SANGAMON	63	38
STA. _____		TO STA. _____		
FED. ROAD DIST. NO. _	ILLINOIS	FED. AID PROJECT		

10-00447-04-PV CITY OF SPRINGFIELD

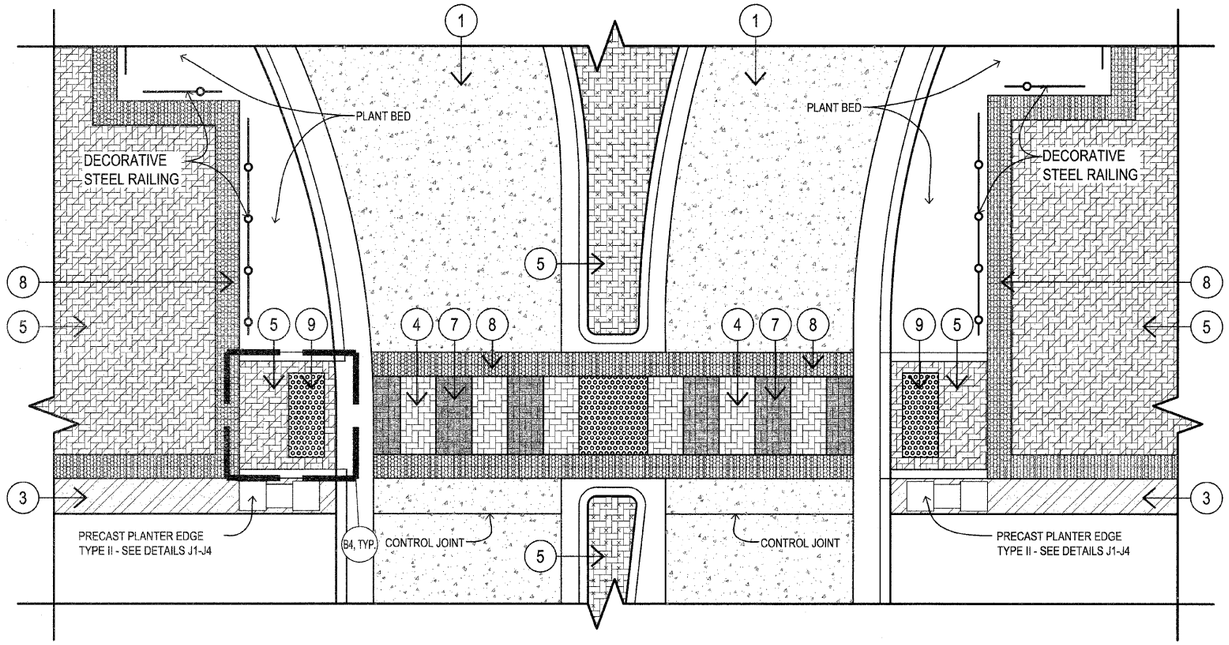

(I1) PLAN: ROAD & SIDEWALK PAVEMENT AND STREETSCAPE ELEMENTS @ ROUNDABOUT CROSSWALKS
N.T.S. / DO NOT SCALE

PLAN ENLARGEMENT PAVEMENT KEYED NOTES

1. TYPE 1 PCC PAVEMENT - ROADWAY PAVEMENT
2. TYPE 2 PCC PAVEMENT - PRIMARY SIDEWALK PAVEMENT, BROOM FINISH
3. TYPE 3 PCC PAVEMENT - SIDEWALK BAND, SMOOTH TROWEL FINISH
4. TYPE 1-PCC PAVER AUTUMN BLEND 90° HERRINGBONE PATTERN
5. TYPE 2-PCC PAVER PRAIRIE BLEND 90° HERRINGBONE PATTERN
6. TYPE 3-PCC PAVER BUFF RUNNING BOND PATTERN
7. TYPE 4-PCC PAVER NATURAL BASKETWEAVE PATTERN
8. TYPE 5-PCC PAVER CHARCOAL STACKED BOND PATTERN
9. DETECTABLE WARNING PAVER
10. TYPE 5-PCC PAVER CHARCOAL 90° HERRINGBONE PATTERN
11. TYPE 5-PCC PAVER CHARCOAL BASKETWEAVE PATTERN 2 COURSE WIDTH
12. TYPE 6-PCC PAVER GOLD BOND PATTERN
13. TYPE 5-PCC PAVER CHARCOAL BOND PATTERN

GENERAL NOTES:

1. A DOUBLE ROW STACKED BOND IS TO BE USED ADJACENT TO ALL CONCRETE PAVEMENT. PAVERS TO BE CUT INSIDE THIS STACKED BOND BAND. NO PAVERS TO BE CUT IN THE RUNNING BOND BAND ADJACENT TO CONCRETE.
2. ALL PATTERNS ARE SHOWN FOR DIFFERENTIATING PAVER TYPES. PATTERNS NOT REPRESENTATIVE OF ACTUAL PAVER LAYOUT.

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

STREETSCAPE IMPROVEMENT

PLAN ENLARGEMENTS - SHEET I
FAU RTE 7982 CAPITOL AVE
SEC NO. 10-00447-04-PV
SANGAMON COUNTY, ILLINOIS

SCALE: VERT. HORIZ.
DATE
DRAWN BY JM
CHECKED BY PD

RDG PLANNING • DESIGN

PLOT DATE = 2020-1-16
FILE NAME = 10100447-01_Details-Phase3-119-ALE.dwg
PLOT SCALE = VARIES
USER NAME = JAM