




**TYPICAL CORNER DETAIL**

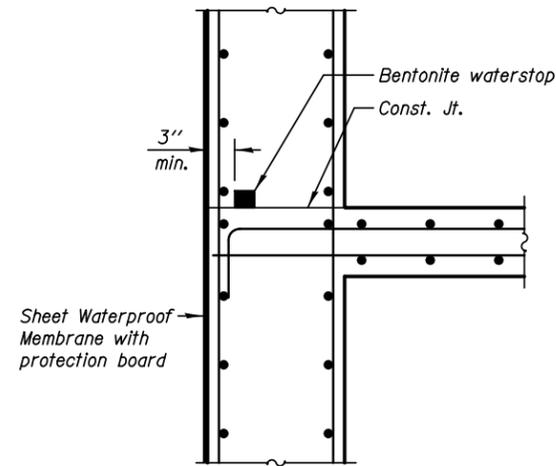

**TYPICAL WATERSTOP DETAIL**

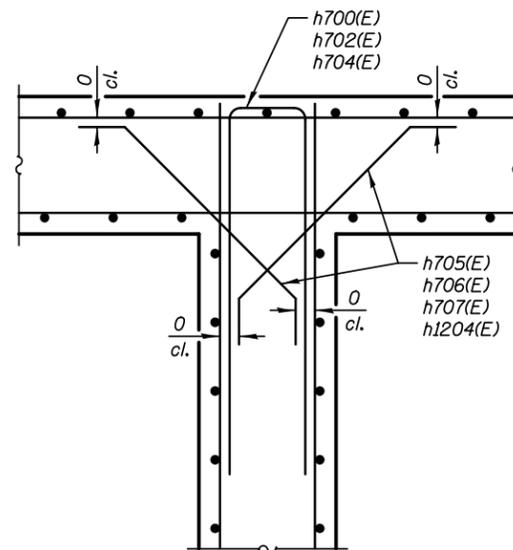


**TYPICAL WALL INTERSECTION DETAIL**

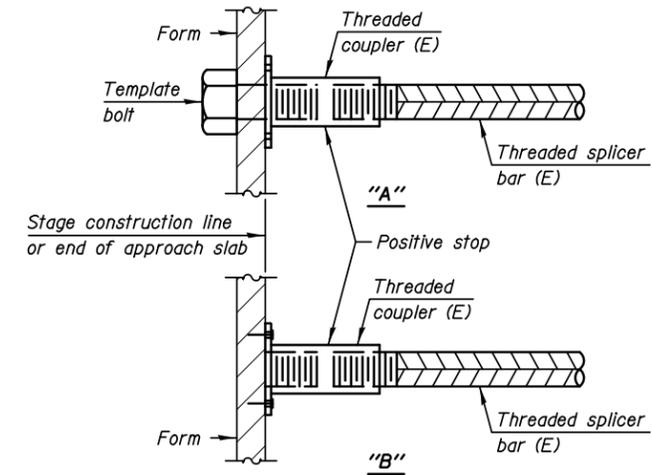

**INSTALLATION AND SETTING METHODS**

"A" : Set bar splicer assembly by means of a template bolt.  
 "B" : Set bar splicer assembly by nailing to wood forms or cementing to steel forms.  
 (E) : Indicates epoxy coating.

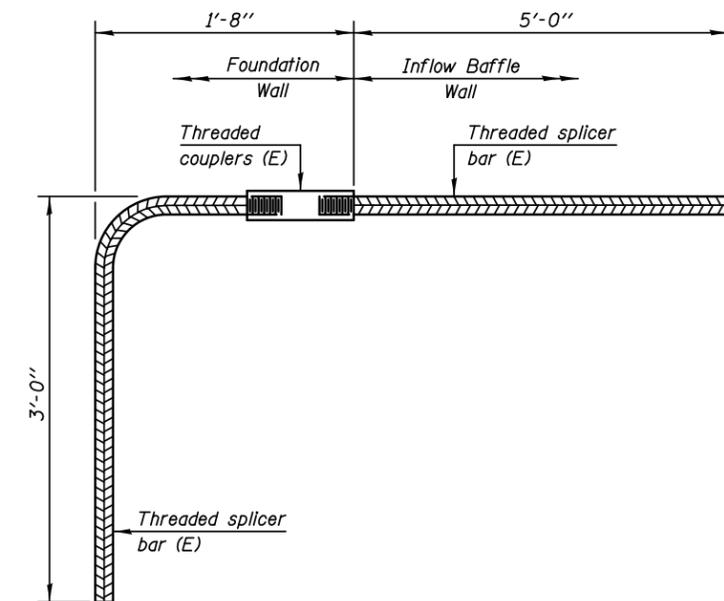

**BAR SPLICER ASSEMBLY**

No. required = 12

**Bar Splicer Assembly Notes:**

Splicer bars shall be deformed with threaded ends and have a minimum 60 ksi yield strength.

All reinforcement shall be lapped and tied to the splicer bars.

Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars. See Section 508 of the Standard Specifications.

See approved list of bar splicer assemblies for alternatives.

DESIGNED - WPM	REVISD -
CHECKED - TB	REVISD -
DRAWN - TB	REVISD -
CHECKED - WPM	REVISD -
SCALE - NONE	
DATE - 3/22/2012	

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
338/IL 59	2011-035-I	DUPAGE	181	107
CONTRACT NO. 60P41				
ILLINOIS FED. AID PROJECT				