
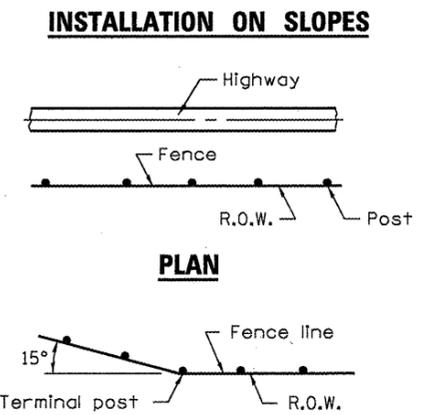




The chain link fabric shall be replaced by barbed wire strands at 12 maximum centers between the double posts when shown on DETAIL A when shown on the plans.

When the width of the culvert makes it necessary to anchor a post to the top of the culvert, a cast iron shoe or other device approved by the Engineer shall be used.

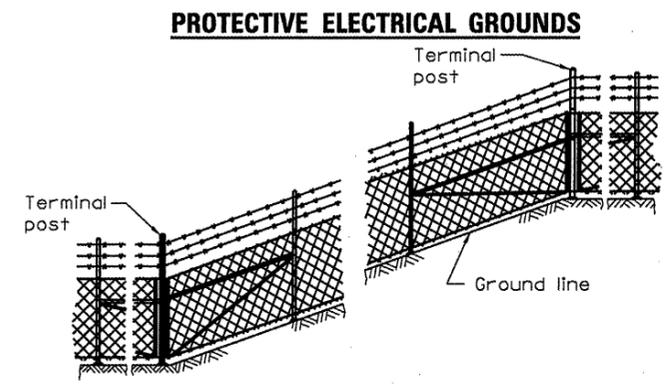

When fence line has a change in direction of 15° or more, a terminal post shall be placed as shown above.

Where angle is less than 15° and existing conditions require a terminal post, they shall be placed as directed by the Engineer.

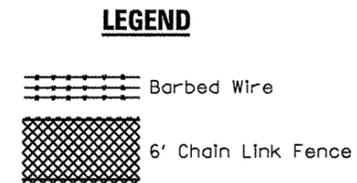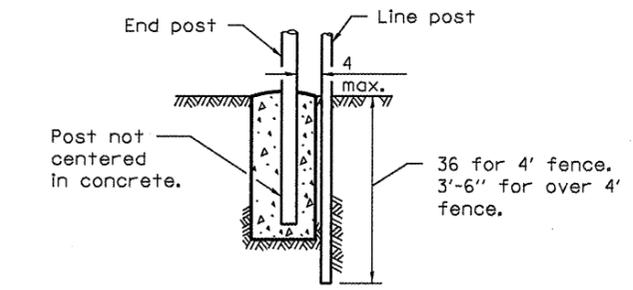

FILE NAME =	USER NAME = potelijj	DESIGNED - TIM PLETSCH	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>CHAIN LINK FENCE DETAILS</b>	F.A.I.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
ct:\pwwork\pedit\potelijj\02282187\036659-shr-details.dgn	DRAWN - TIM PLETSCH	REVISED -	80			D3 FENCE REPAIR 2012-1	LASALLE	7	7	
PLOT SCALE = 100.0000' / 1"	CHECKED - RON WOODSHANK	REVISED -	CONTRACT NO. 66B69							
PLOT DATE = 2/16/2012	DATE -	REVISED -	ILLINOIS FED. AID PROJECT							
					SCALE:	SHEET 3 OF 3 SHEETS STA.		TO STA.		