


MILL MACHINE AND/OR WHEEL SAW REMOVAL

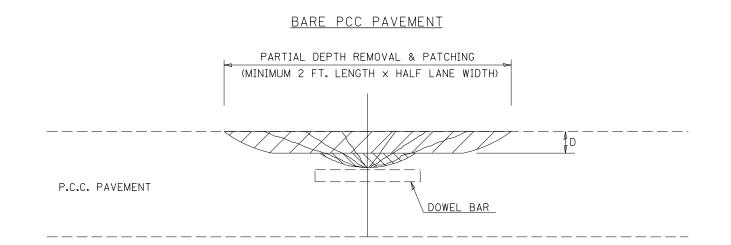

ALL VOLUME OF PARTIAL DEPTH REMOVAL SHALL BE REPLACED WITH HOT-MIX ASPHALT (HMA) AND PAID FOR AT THE CONTRACT UNIT PRICE PER TON FOR PARTIAL DEPTH PATCHING.

HMA REPLACEMENT IN RESURFACED PCC PAVEMENT LOCATIONS SHALL BE ACCORDING TO SECTION 406 OF THE STANDARD SPECIFICATIONS.

D = DEPTH OF PARTIAL DEPTH REMOVAL INTO EXISTING PCC PAVEMENT. $(3'' (75 \text{ mm}) \pm \text{OR TO SOUND CONCRETE})$

SIMILAR.

| FILE NAME = | USER NAME = berganaj | DESIGNED | REVISED - 11/06 | | | | F.A.I. S | ECTION | COUNTY | TOTAL SHE |
|-------------|-----------------------|----------|------------------------|------------------------------|--|------------|--|--------------|--------|--------------------|
| | | DRAWN | REVISED - <u>10∠10</u> | STATE OF ILLINOIS | PCC PARTIAL DEPTH HOT-MIX ASPHALT PATCHING | | 39 D5 PAT | CHING 2013-1 | MCLEAN | 19 18 |
| | | CHECKED | REVISED | DEPARTMENT OF TRANSPORTATION | | | | | | CONTRACT NO. 70973 |
| | PLOT DATE = 3/22/2012 | DATE - | REVISED | | SCALE: SHEET NO. 1 OF 1 SHEETS | STA TO STA | FED. ROAD DIST. NO ILLINOIS FED. AID PROJECT | | | |

AIR EQUIPMENT OR MECHANICAL SWEEPER REMOVAL OF LOOSE AND/OR UNSOUND CONCRETE

= PARTIAL DEPTH REMOVAL (of the thickness specified)

GENERAL NOTES

GENERAL NOTE 406H SHALL INCLUDE MIXTURE REQUIREMENTS FOR PARTIAL DEPTH PATCHING.

TRANSVERSE CONTRACTION JOINT SHOWN - OTHER LOCATIONS

Note: All dimensions are in INCHES (millimeters) unless otherwise shown.