
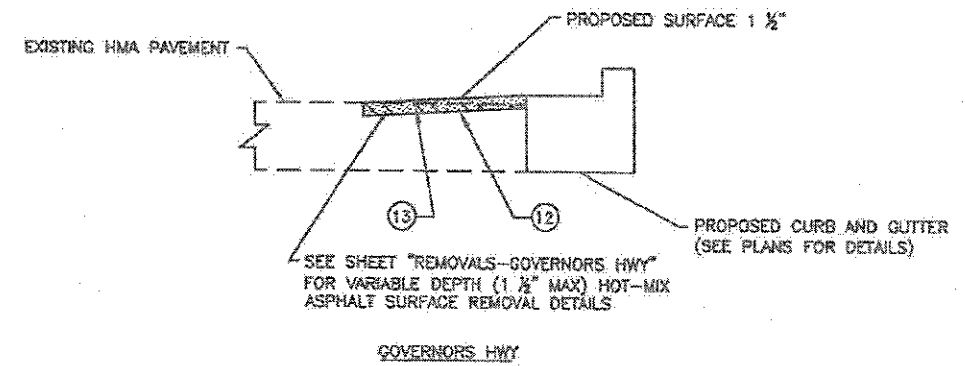


HOT MIX ASPHALT MIXTURE REQUIREMENTS

HOT MIX ASPHALT MIXTURE REQUIREMENTS	
MIXTURE TYPE	PERCENT AIR VOIDS @75°F
ROADWAY RESURFACING, 1 1/2"	
HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70 (21-9.5mm)	4% @ 70 Gyr.

1. THE UNIT WEIGHT USED TO CALCULATE ALL HOT-MIX ASPHALT SURFACE MIXTURES IS 112 Lbs/SqYd/In
2. THE "AG TYPE" SHALL BE PG 64-22 UNLESS MODIFIED BY SPECIAL PROVISION
3. FOR USE OF RECYCLED MATERIALS, SEE SPECIAL PROVISIONS.

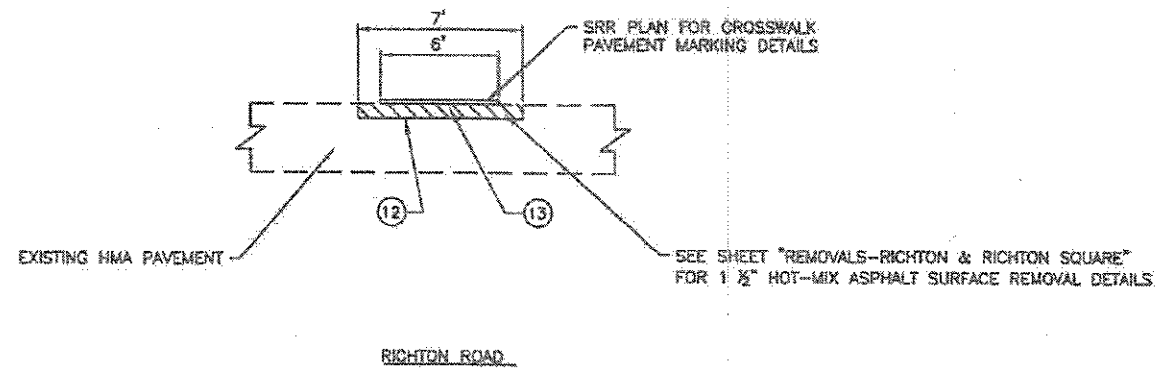

RESURFACING DETAILS
N.T.S

- 12 BITUMINOUS MATERIALS (TACK COAT)
- 13 HOT MIX ASPHALT SURFACE COURSE, MIX "D", N70, 1 1/2"

FILE NAME = RESURF-GENERAL INFO:RTK/ALMG	USER NAME = AM A. HNG FLORES	DESIGNED = TSWANS	REVISED = Δ 5-27-2018	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TYPICAL SECTIONS	F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	PLOT SCALE = ---	DRAWN = SBUTTERFIELD	REMOVED = -			* 15-00689-00-SW	COOK	68	8	
	PLOT DATE = 8/21/2018 3:44 PM	CHECKED = --	REMOVED = -			*1832/3778	CONTRACT NO. 61E56			
				SCALE: NONE SHEET NO. 2 OF 2 SHEETS STA. TO STA.		FEDERAL ROAD DISTRICT ILLINOIS (FED. AID PROJECT)				