

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION SHRMITTEN

PRINTED BY THE AUTHORITY OF THE STATE OF ILLINOIS

INDEX OF SHEETS

SHEET NO	DESCRIPTION	STANDARD NO	DESCRIPTION
1.	TITLE SHEET	000001-06	STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
2.	INDEX OF SHEETS, STATE STANDARDS, AND GENERAL NOTES	424001-09	PERPENDICULAR CURB RAMPS FOR SIDEWALKS
3-5.	SUMMARY OF QUANTITIES	424006-02	DIAGONAL CURB RAMPS FOR SIDEWALKS
6	TYPICAL SECTIONS	424011-03	CORNER PARALLEL CURB RAMPS FOR SIDEWALKS
7-13.	ROADWAY & PAVEMENT MARKING PLANS	424016-03	MID-BLOCK CURB RAMPS FOR SIDEWALKS
14-24	ADA RAMP DESIGN	424021-03	DEPRESSED CORNER FOR SIDEWALKS
	ADA NAME UEJINY	442201-03	CLASS C AND D PATCHES
25-28	DETECTOR LOOP PLANS	604001-04	FRAME AND LIDS. TYPE 1
29	DETAILS FOR FRAMES AND LIDS ADJUSTMENT WITH MILLING (BD-8)	606001-06	COMBINATION CONCRETE CURB AND GUTTER
30	PAVEMENT PATCHING FOR HOT-MIX ASPHALT SURFACED PAVEMENT (BD-22)	701101-05	OFF-ROAD OPERATIONS. MULTILANE. 15' TO 2' FROM PAVEMENT EDGE
31	CURB OR CURB AND GUTTER REMOVAL AND REPLACEMENT (BD-24)	701421-08	LANE CLOSURE. MULTILANE, DAY OPERATIONS ONLY, FOR SPEEDS > 45 TO 56 MPH
32	BUTT JOINTS AND TAPERS (BD-32)		-
33	TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS. INTERSECTIONS AND DRIVEWAYS (TC-10)	701426 -09	LANE CLOSURE. MULTILANE, INTERMITTENT OR MOVING OPERATIONS. FOR SPEEDS \geq 45 MPH
34	TYPICAL APPLICATIONS RAISED REFLECTIVE PAVEMENT MARKERS (SNOW	701427- 05	LANE CLOSURE, MULTILANE. INTERMITTENT OR MOVING OPERATIONS, FOR SPEEDS & 40 MPH
	PLOW RESISTANT) (TC-)))	701601-09	URBAN LANE CLOSURE, MULTILANE. IW OR 2W WITH NON-TRAVERSABLE MEDIAN
35	DISTRICT ONE TYPICAL PAVEMENT MARKINGS (TC-13)		
36	TRAFFIC CONTROL AND PROTECTION AND TURN BAYS (TO REMAIN OPEN	701602-08	URBAN LANE CLOSURE, MULTILANE, 2W WITH BIDIRECTIONAL LEFT TURN LANE
	TO TRAFFIC (TC-14)	701606-10	URBAN LANE CLOSURE, MULTILANE, 2W WITH MOUNTABLE MEDIAN
37	SHORT TERM PAVEMENT MARKING LETTERS AND SYMBOLS	701611-01	URBAN HALF ROAD CLOSURE. MULTILANE, 2W WITH MOUNTABLE MEDIAN
38	ARTERIAL ROAD INFORMATION SIGN (TC-22)		
39	DISTRICT ONE - DETECTOR LOOP INSTALLATION DETAILS FOR	701701-10	URBAN LANE CLOSURE, MULTILANE INTERSECTION
	ROADWAY RESURFACING (TS-07)	701801-06	LANE CLOSURE MULTILANE, IW OR 2W CROSSWALK OR SIDEWALK CLOSURE
		701901 -D Ø	TRAFFIC CONTROL DEVICES

STATE STANDARDS

THE CONTRACTOR SHALL BE REQUIRED TO PROVIDE ACCESS TO ABUTTING PROPERTY AT ALL TIMES DURING THE CONSTRUCTION OF THIS PROJECT.

ITEM HAS BEEN PROVIDED.

DEPARTMENT.

DO NOT SCALE PLANS FOR CONSTRUCTION DIMENSIONS.

ENGINEER.

OTHERWISE SPECIFIED.

OVERNIGHT LANE CLOSURES SHALL NOT BE ALLOWED FOR REHABILITATION PROJECTS INVOLVING DAYTIME MILLING AND RESURFACING OPERATIONS AND CLASS D PATCHING UNLESS OTHER CONDITIONS WARRANT EXTENDED LANE CLOSURES AS DETERMINED AND APPROVED IN WRITING BY THE ENGINEER OR AS PROVIDED FOR IN THE CONTRACT SPECIFICATIONS.

TAPE TYPE III SHALL BE USED ON FINAL SURFACES.

CONTRACTOR SHALL MAINTAIN PEDESTRIAN ACCESS AT ALL TIMES DURING CONSTRUCTION.

FILE NAME +	USER NAME	z gui)taumefø	DESIGNED -	REVISED	-
p=:\\IL084EBIDINTEG.:I\Inoi>.govPWIDOT\Do	uments\(001 (Offices/District 1/Projects/0139	nggadata\Design\Di39816-sht-plan.dgn	REVISED	•
	PLOT SCALE	* 100.0050 * / in.	CHECKED -	REVISED	-
Default	O OT DATE	*********	DATE _	021/1020	-

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

US 52 (0.1 miW. OF WYNSTONE DRI SCALE. SUCET 0f CHEETS ST

INDEX OF SHEETS, STATE STANDARDS

GENERAL NOTES:

BEFORE STARTING ANY EXCAVATION, THE CONTRACTOR SHALL CALL "JULIE" AT 800-892-0123 OR 811 FOR FIELD LOCATIONS OF BURIED ELECTRIC, TELEPHONE AND GAS FACILITIES (48 HOUR NOTIFICATION IS REQUIRED).

THE CONTRACTOR SHALL COORDINATE CONSTRUCTION ACTIVITIES WITH UTILITY COMPANIES AND THE VILLAGE OF SHOREWOOD.

THE CONTRACTOR WILL NOT BE ALLOWED TO SET UP A YARD OR FIELD OFFICE ON STATE PROPERTY WITHOUT WRITTEN PERMISSION FROM THE

ANY PAVEMENT MARKINGS AND RAISED REFLECTIVE PAVEMENT MARKERS OBLITERATED BY MILLING AND RESURFACING OPERATIONS ON SIDE STREETS AND ENTRANCES SHALL BE REPLACED AND PAID FOR IN KIND.

WHEN MILLED PAVEMENT IS OPEN TO TRAFFIC THE MAXIMUM GRADE DIFFERENTIAL BETWEEN PASSES OF THE MILLING MACHINE SHALL NOT EXCEED 1 1/2 INCHES (40MM) WHERE THE SPEED LIMIT IS 40 MPH (80KM/H) OR LESS AND 1 INCH (25 MM) WHERE THE SPEED LIMIT IS CREATER THAN 40 MPH (80 KM/H). WITH WRITTEN APPROVAL FROM THE ENGINEER. A MAXIMUM GRADE DIFFERENTIAL OF 3 INCHES (75 MM) MAY BE ALLOWED IF THE EDGE OF THE MILLING IS SLOPED A MINIMUM 1:3 (V:H) OR A NOTCHED LONGITUDINAL WEDGE IS USED.

BEFORE BEGINNING ANY WORK. THE CONTRACTOR SHALL RETAIN AND RECORD FOR FUTURE REFERENCE, ALL EXISTING PAVEMENT MARKING LINES AND REVISED REFLECTIVE PAVEMENT MARKERS IN ORDER THAT THESE LOCATIONS CAN BE RE-ESTABLISHED FOR STRIPING. EXACT LOCATIONS OF ALL PAVEMENT MARKINGS SHALL BE AS DIRECTED BY THE ENGINEER.

THE RESIDENT ENGINEER SHALL CONTACT ERIC CAMPOS, AREA TRAFFIC FIELD ENGINEER AT ERIC.CAMPOSOILLINOIS.COV OR AT 815-485-6475 A MINIMUM OF TWO (2) WEEKS PRIOR TO THE PLACEMENT OF PERMANENT PAVEMENT MARKINGS.

DRAINAGE ADJUSTMENT OR RECONSTRUCTION LOCATIONS WILL BE DETERMINED IN THE FIELD BY THE ENGINEER.

THE CONTRACTOR SHALL CONTACT THE DISTRICT ONE TRAFFIC CONTROL SUPERVISOR AT (847) 705-4470 A MINIMUM OF 72 HOURS IN ADVANCE OF BEGINNING WORK.

IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO VERIFY ALL DIMENSIONS AND CONDITIONS EXISTING IN THE FIELD PRIOR TO CONSTRUCTION AND ORDERING OF MATERIALS.

EXISTING BROKEN FRAMES AND LIDS SHALL BE REMOVED AND DISPOSED OF BY THE CONTRACTOR AND SHALL BE REPLACED AS DIRECTED BY THE ENGINEER. REPLACEMENT FRAMES AND LIDS WILL BE PAID FOR ACCORDING TO ARTICLE 109.04 OF THE STANDARD SPECIFICATIONS UNLESS A SEPARATE PAY

DOUBLE LANE MARKERS ARE TO BE USED AS SHOWN ON THE DISTRICT ONE DETAIL "TYPICAL APPLICATIONS - RAISED REFLECTIVE PAVEMENT MARKERS (SNOW-PLOW RESISTANT)" SHOWN IN THE PLANS.

ALL PAVEMENT PATCHING LOCATIONS WILL BE DETERMINED IN THE FIELD BY THE

LOCATION OF COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT WILL BE DETERMINED IN THE FIELD BY THE ENGINEER,

THESE PLANS HAVE BEEN PREPARED FROM NOTES RECEIVED FROM THE BUREAU OF CONSTRUCTION.

BUTT JOINTS WILL BE INSTALLED AT THE ENDS OF ALL RESURFACING (WHERE RESURFACING MEETS EXISTING PAVEMENT) ACCORDING TO THE "BUTT JOINT AND HOT-MIX ASPHALT TAPER DETAILS" SHEET INCLUDED IN THE PLANS, UNLESS

AND GENERAL NOTES	F.A.P. RTÉ.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
IVE TO EDEN DRIVE	607	128R\$-5	WILL	39	2
The to polit didit.			CONTRACT	NO. 62	2083
TA TO STA		burneleren in	A ANA		······

CODE NO	SUMMARY OF QUANTITIES		***		· · · · · · · · · · · · · · · · · · ·	CALCTOURST	101. 71/00	COOC							
CODE NO			ļ			UNSTRUCT	ION TYPE	LUDE		-		SUMMA	ARY OF QUANTITIES		
l	ITEM	UNIT	TOTAL	ROADWAY 0005 80 20 (FED STHIE)							CODE NO		ITEM	UN1T	
20200100	EARTH EXCAVATION	CU YD	50	50							42400200	PORTLAND CE	MENT CONCRETE SIDEWALK 5	SO FT	
												1NCH			
21101615	TOPSOIL FURNISH AND PLACE, 4"	SQ YD	370	370											
											42400800	DETECTABLE	WARNINGS	50 FT	
25000400	NITROGEN FERTILIZER NUTRIENT	POUND	5	5							~				
											44000159	HOT-MIX ASP	HALT SURFACE REMOVAL, 2	SO YD	
25000500	PHOSPHORUS FERTILIZER NUTRIENT	POUND	5	5								1/2"			
25000600	POTASSIUM FERTILIZER NUTRIENT	POUND	5	5						L	44000600	SIDEWALK REI	MOVAL	S0 FT	
										T					
25200110	SODDING, SALT TOLERANT	50 YD	370	370	ан а						44201803	CLASS D PAT	CHES, TYPE 11, 13 INCH	50 YD	
25200200	SUPPLEMENTAL WATERING	UNIT	4.0	4.0							44201807	CLASS D PAT	CHES, TYPE III, 13 INCH	SQ YD	
40600290	BITUMINOUS MATERIALS (TACK COAT)	POUND	57340	57340							44201809	CLASS D PAT	CHES, TYPE IV, 13 INCH	SO YD	
40600400	MIXTURE FOR CRACKS, JOINTS, AND	TON	1 30	1 30							60250200	CATCH BASIN	S TO BE ADJUSTED	EACH	
	FLANGEWAYS														
											60266600	VALVE BOXES	TO BE ADJUSTED	EACH	
40600827	POLYMERIZED LEVELING BINDER (MACHINE	TON	3510	3510								50,005,00,000			
	METHOD), 1L-4.75, N50										60300105	FRAMES AND	GRATES TO BE ADJUSTED	EACH	
40600982	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT	SO YD	650	650							60406100	FRAMES AND I	LIDS, TYPE 1, CLOSED LID	EACH	
	JOINT							**************************************							
40603565	POLYMERIZED HOT-MIX ASPHALT SURFACE	TON	8330	8330						*	66900200	NON-SPECIAL	WASTE DISPOSAL	CU YD	
	COURSE, MIX "E", N70									*	66900450	SPECIAL WAS	TE PLANS AND REPORTS	LSUM	
									· · · · · · · · · · · · · · · · · · ·						
42001300	PROTECTIVE COAT	SO YD	650	650						*	66900530	SOIL DISPOSA	AL ANALYSIS	EACH	
								And a second sec		5	67000400	ENGINEER'S F	FIELD OFFICE, TYPE A	CAL MO	
FILE NAME = AniWLOB4EBIDINTEGJ	ШпазорнРЖООТ-ОопланныхОО 07710050215170 №10300150203001502000150069900039069 PLOT SCALE = 1000000 °/ In, C	ESIGNED - RAWDAD - HECKED - ATE -	L	REVISED REVISED REVISED REVISED	-	l			STATE OF			TION	1	MIW. OF WYNSTONE I SUMMARY OF QUAN	

ß


	URBAN						
				ONSTRUCT	ION TYPE	CODE	7
	TOTAL QUANTITIES	ROADWAY 0005 BO[ZO (FED STATE)					
r	4000	4000					
r 	600	600					
)	84940	84940					
	4000	4000					
)	930	930					
)	48	48					
)	55	55					
			· · · · · · · · · · · · · · · · · · ·				
	3	3					
	3	3	<u></u>		ан ан ан ан ан ан ан ан ан ан		
	4	4	**************************************				
	3	3					
					·		
	30	30					
		1					
	3		******			-	
	ł	1					
DR	8 . TO EDEN I	8 DRIVE)	F.A.P RTE.	SEC	T10N	COUNTY	TOTAL SHEET SHEETS NO.
	TIES	,	607	128F	IS-5	WHLL	39 3
STA.) STA.		IOAD DIST, NO. 1	RI INDICISIO	CONTRACT	NO. 62C83
			1 1 20. 1	WW BERE NULL	Inconversion Al		

			URBAN											URBAN						
	SUMMARY OF QUANTITIES				1	CONSTRUCT	ION TYPE	CODE			SUMMA	RY OF QUANTITIES			80 20	CI		ON TYPE C	ODE	
CODE NO	ITEM	UNIT	TOTAL	ROADWAY 0005 50/20 (FED)STHIE		****				CODE NO		ITEM	UNIT	TOTAL	(FED STATE)					
67100100	MOBILIZATION	LSUM	1	1						70300250	TEMPORARY PA	AVEMENT MARKING - LINE 8"	FOOT	250	250					
						-														
70100310	TRAFFIC CONTROL AND PROTECTION.	LSUM	1	1						70300260	TEMPORARY PA	AVEMENT MARKING - LINE 12"	FOOT	3000	3000					
	STANDARD 701421			_						-										
	·								· · · · · · · · · · · · · · · · · · ·	70300280	TEMPORARY PA	AVEMENT MARKING - LINE 24"	FOOT	550	550					
70102625	TRAFFIC CONTROL AND PROTECTION,	LSUM	1	1						-	·····	· · · ·								
	STANDARD 701606									70300520	PAVEMENT MAR	RKING TAPE, TYPE 111 4"	FOOT	10000	10000					
70102632	TRAFFIC CONTROL AND PROTECTION,	LSUM	1	1						* 78000100	THERMOPLASTI	C PAVEMENT MARKING -	SO FT	1250	1250					
	STANDARD 701602										LETTERS AND	SYMBOL S								
70102634	TRAFFIC CONTROL AND PROTECTION,	LSUM	1	1						* 78000200	THERMOPLASTI	C PAVEMENT MARKING - LINE	FOOT	60840	60840					
	STANDARD 701611								-		4"									
70102635		LSUM	1	1				*****		* 78000400		C PAVEMENT MARKING - LINE	FOOT	5700	5700					
	STANDARD 701701										6″									
70102640	TRAFFIC CONTROL AND PROTECTION,	LSUM	3	1					12	* 78000500	THERMOPLASTI	C PAVEMENT MARKING - LINE	FOOT	250	250					
	STANDARD 701801										8"									
70300100	SHORT TERM PAVEMENT MARKING	FOOT	20000	20000						* 78000600	THERMOPLASTI	C PAVEMENT MARKING - LINE	FOOT	3000	3000					
				-							12"									·
70300150	SHORT TERM PAVEMENT MARKING REMOVAL	SO FT	6670	6670				·										······································		
										* 78000650		C PAVEMENT MARKING - LINE	FOOT	550	550					
70300210	TEMPORARY PAVEMENT MARKING LETTERS AND	SO FT	1250	1250		an a					24"									
	2 HROL 2									* 78100100	RAISED REFLE	CTIVE PAVEMENT MARKER	EACH	1500	1500					
70300220	TEMPORARY PAVEMENT MARKING - LINE 4"	FOOT	60840	60840																
										78300200	RAISED REFLE	CTIVE PAVEMENT MARKER	EACH	1250	1250					
70300240	TEMPORARY PAVEMENT MARKING - LINE 6"	FOOT	5700	5700							REMOVAL									
FILE NAME =		DESIGNED -	<u></u>	REVISED						2]	110 E2 (0.418) (41 OF 141	VAICTORIE DO		DIVE	F,A,P RTE. 607	SECTI	ON	COUNTY S	TOTAL SHEET HEETS NO.
DWWLOB4EBIDINTEGJ		CHECKED -		REVISED REVISED			l r			ILLINOIS TRANSPORTA	TION		IY OF QUANT	ITIES	111VE) .	607	128R5		WILL	39 4
	PLOT DATE + 1/10/2011 [DATE -		REVISED	-							SCALE: SHEET NO. OF	SHEETS ST	۱,	10 \$TA.	FED. RO	AD DIST. NO. 1 1	LLINOIS FED. AID	PROJECT	

()	R	в	iA	R I
- 7.4	5	\sim	r 1	na.

	ſ		<u>.</u>	URBAN		CONSTRUC	TION TYPE C					
		SUMMARY OF QUANTITIES		-			I I I			SUMMARY OF	OUANTITIES	
	CODE NO	ITEM	UNIT	TOTAL QUANTITIES	ROADWAY 0005 80/20 (FED STATE)				CODE NO		ITEM	UNIT
*		DETECTOR LOOP REPLACEMENT	FOOT	2841	2841							
	x0320050	CONSTRUCTION LAYOUT (SPECIAL)	LSUM	1	1							
		·····						-				
А	X5537800	STORM SEWERS TO BE CLEANED 12"	FOOT	2600	2600							
	x6030310	FRAMES AND LIDS TO BE ADJUSTED	EACH	20	20							
		(SPECIAL)									· <u></u>	
	x7030005	TEMPORARY PAVEMENT MARKING REMOVAL	SO FT	30740	30740							
							-				·····	
	Z0004562	COMBINATION CONCRETE CURB AND GUTTER	FOOT	1260	1260							
		REMOVAL AND REPLACEMENT										
۵	Z0018500	DRAINAGE STRUCTURES TO BE CLEANED	EACH	134	134							
										·		
	Z0030850	TEMPORARY INFORMATION SIGNING	SO FT	128.5	128.5							
		······································										
			·/···									
		* SPECIALTY ITEM										
8		A NON PARTICIPATING										
	FILE NAME : DWNLOB4EBIDINTEGJI	tilnols.gov.PWiDDT\Documents\DDT_Offices\District_t\Ptafects\Di390t6\CADDatr\Deslgn\Di390			REVISED	-	-	STATE OF I	LLINOIS	-	US 52 (0.1MI W. OF W	
			CHECKED - DATE -		REVISED REVISED		- Di	PARTMENT OF TR	ANSPORTAT	ION		SHEETS STA

-		,	C	ONSTRUCT	ION TYPE	CODE	
TOTAL QUANTITIES							
	-						
						· · · · · · · · · · · · · · · · · · ·	
_							
IR. TO EDEN C	 DRIVE)		F.A.P RTE, 607	SEC1		発行す	TOTAL SHEET HEETS NO. 39 S
	O STA,		FED. R	DAD DIST. NO. 1	ILLINOIS FED. AID	CONTRACT PROJECT	NO. 62C83

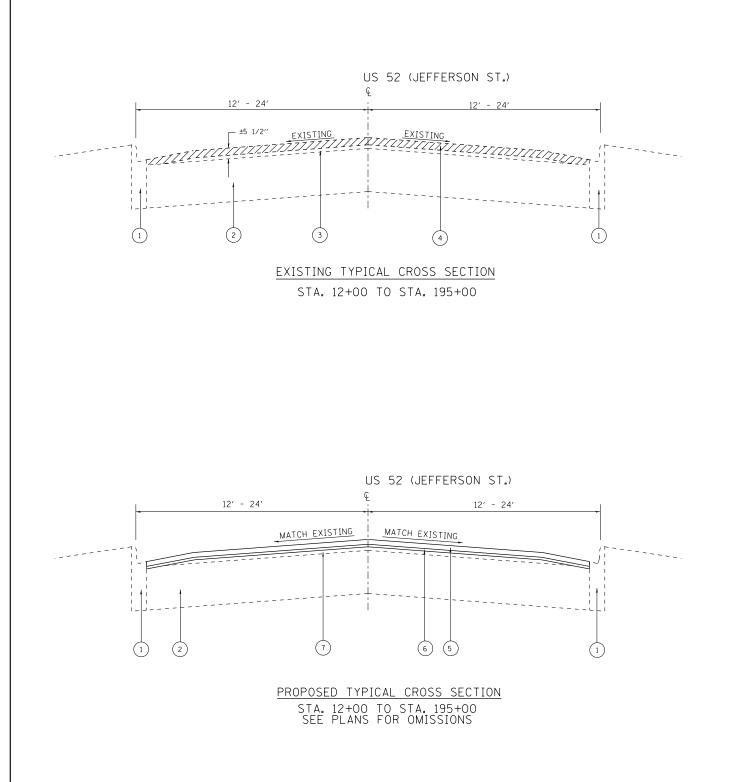

MIXTURE REQUIREMENTS		QUALITY MANAGEMENT			
MIXTURE USES	VOIDS © Ndes	PROGRAM (QMP)			
PAVEMENT & SHOULDER RESURFACING					
POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "E", N7O (IL 9.5 mm)	4% AT 70 GYR.	PFP			
POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50	3.5% AT 50 GYR.	QCP			
PATCHING					
LASS D PATCHES (HMA BINDER, IL-19.0 mm)	4% AT 70 GYR.	0C/0A			
MP Designation: Quality Control/Quality Assurance (QC/QA); Quality Contr	ol for Performance (Q	CP); PAY FOR PERFORMANCE (PFP)			

NOTE 1: NOTE 2: THE "AC TYPE" FOR POLYMERIZED HMA MIXES SHALL BE "SBS/SBR PG 76-22" AND FOR NON-POLYMERIZED HMA THE "AC TYPE" SHALL BE "PG 64-22" UNLESS MODIFIED BY DISTRICT ONE SPECIAL PROVISIONS. FOR USE OF RECYCLED MATERIALS SEE SPECIAL PROVISIONS. QUALITY MANAGEMENT PROGRAM (QMP) IDENTIFIES THE PARTICULAR QUALITY CONTROL SPECIFICATION THAT APPLIES TO THE HMA MIXTURE

NOTE 3: ALL THE PAVEMENT MARKINGS ARE TO BE INSTALLED ACCORDING TO THE IDOT'S DI DETAIL TC-13. NOTE 4: ALL THE RAISED REFLECTIVE PAVEMENT MARKERS ARE TO INSTALLED ACCORDING TO THE IDOT'S DI DETAIL TC-11.

THE CONTRACTOR SHALL MILL FIRST BEFORE PATCHING.


FILE NAME =	USER NAME = guillaumefp	DESIGNED -	REVISED -				ТҮР	ICAL SEC	TIONS		F.A.U RTE	SECTION	COUNTY	TOTAL SHEET SHEETS NO.
pw:\\IL084EBIDINTEG.1111no1s.gov:PWID01	Documents\IDOT_Offices\District_I\Projects\D13	901 BR(A4(1)) ata\Design\D139016-sht-plan.dgn			US 52 (JEFFERSON ST.)–(.01 MI. WEST OF WYNSTONE DR. TO EDEN DR.)					1954	128RS-5	WILL	39 6	
	PLOT SCALE = 100.0000 ' / 10.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION	US SZ (JEFFEN	JS 52 (JEITERSON ST.)-(.01 WII. WEST OF WINSTONE DR. TO EDEN DR.)					CONTRAC	T NO. 62C83		
	PLOT DATE = 4/10/2017	DATE -	REVISED -		SCALE: 1"=50'	SHEET NO.	OF	SHEETS	S STA.	TO STA.		ILLINOIS FED. A	ID PROJECT	


LEGEND


- 1) EXISTING COMBINATION CURB AND GUTTER


- (7)HMA OVERLAY AFTER MILLING ± 3"

(2) EXISTING PORTLAND CEMENT CONCRETE PAVEMENT (9" AND VARIES) (3) EXISTING HMA PAVEMENT (5-1/2" AND VARIES) (4) PROPOSED HMA SURFACE REMOVAL (2-1/2") (5) PROPOSED POLYMERIZED HMA SURFACE COURSE, MIX "E", N70 (1-3/4") (6) PROPOSED POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50 (3/4")

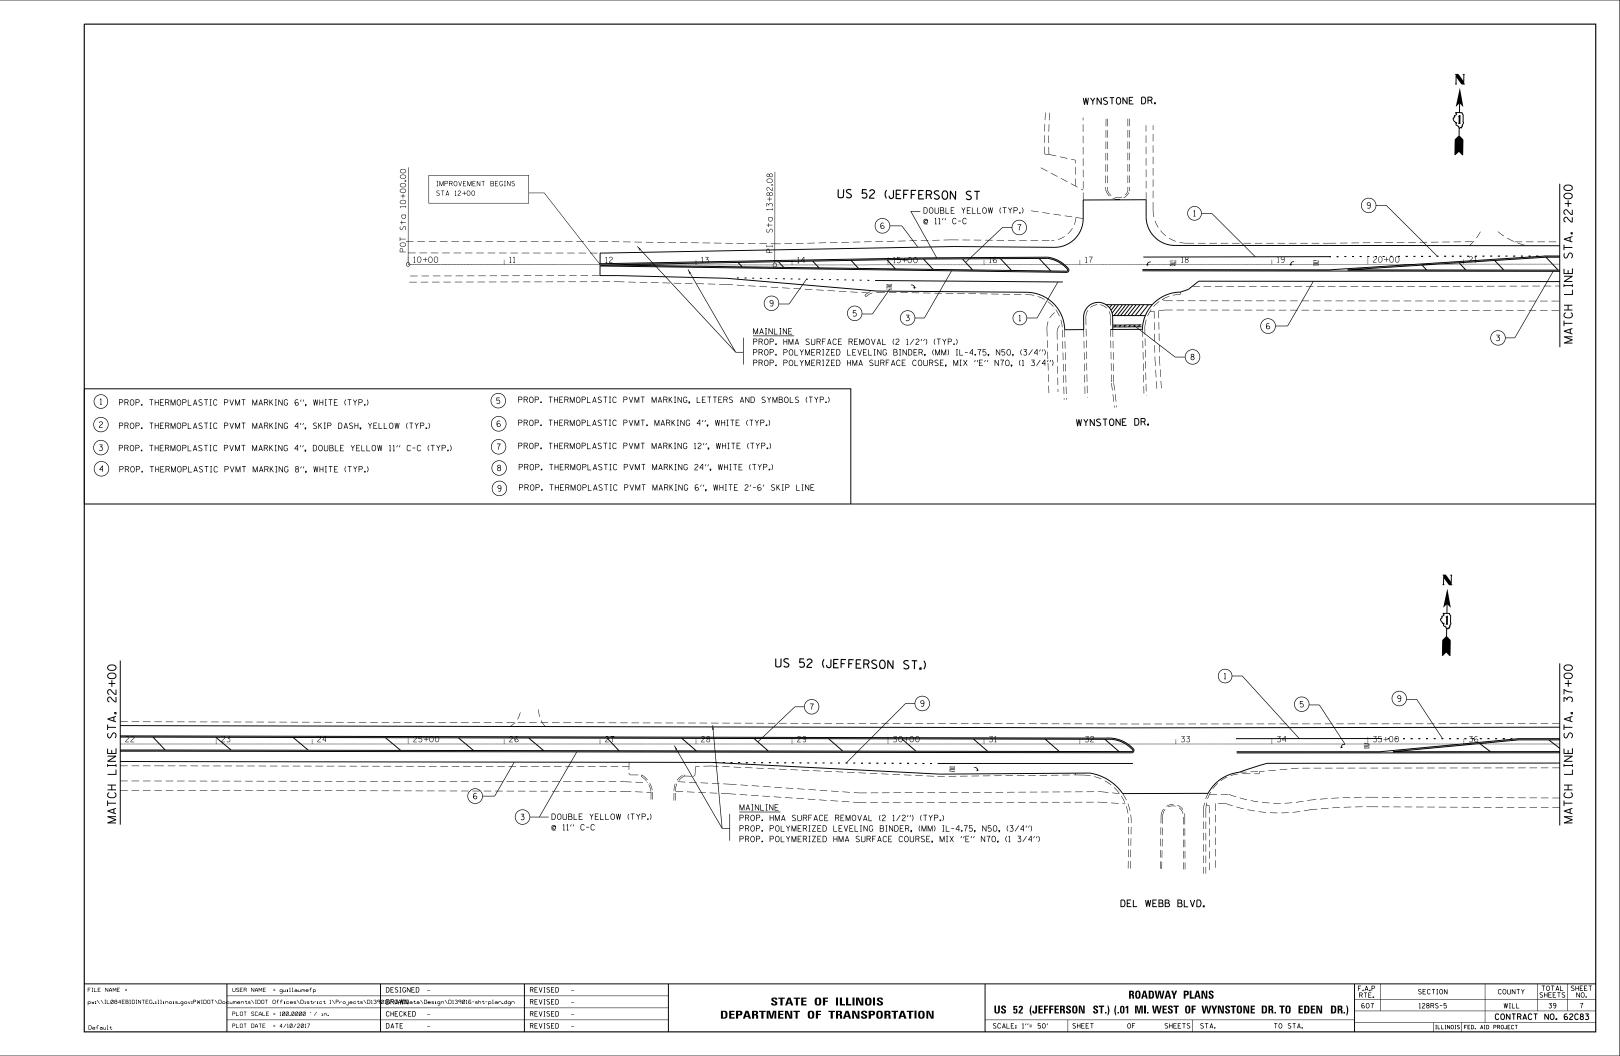


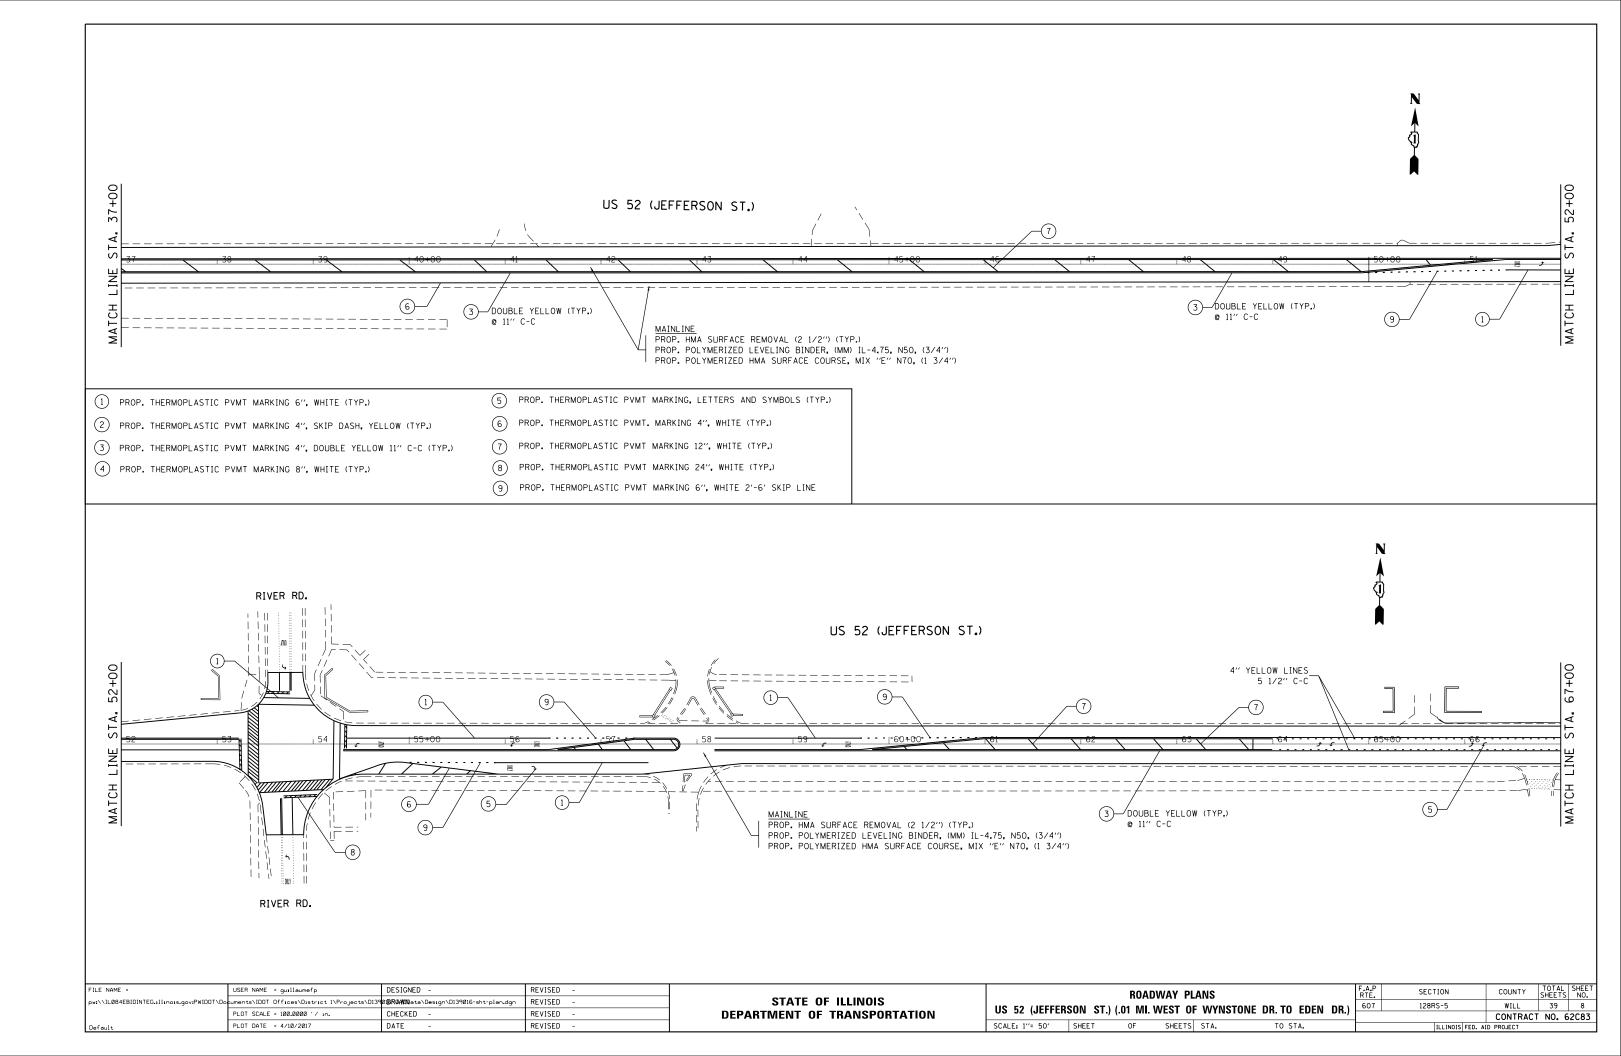


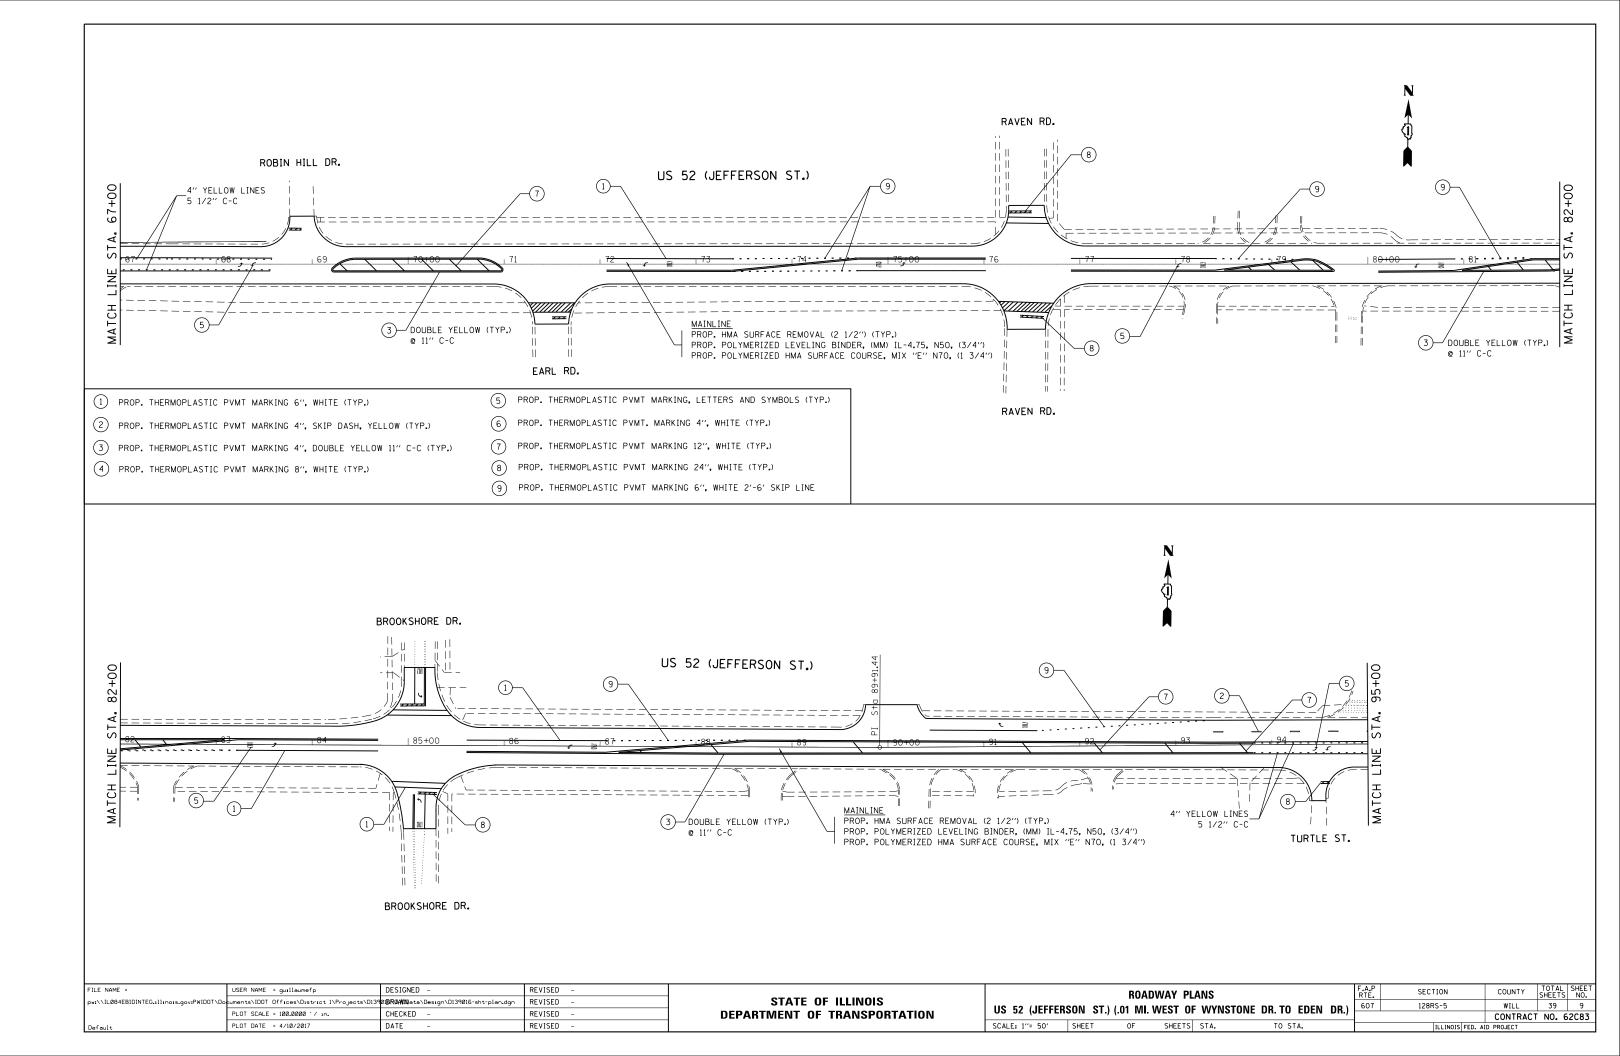


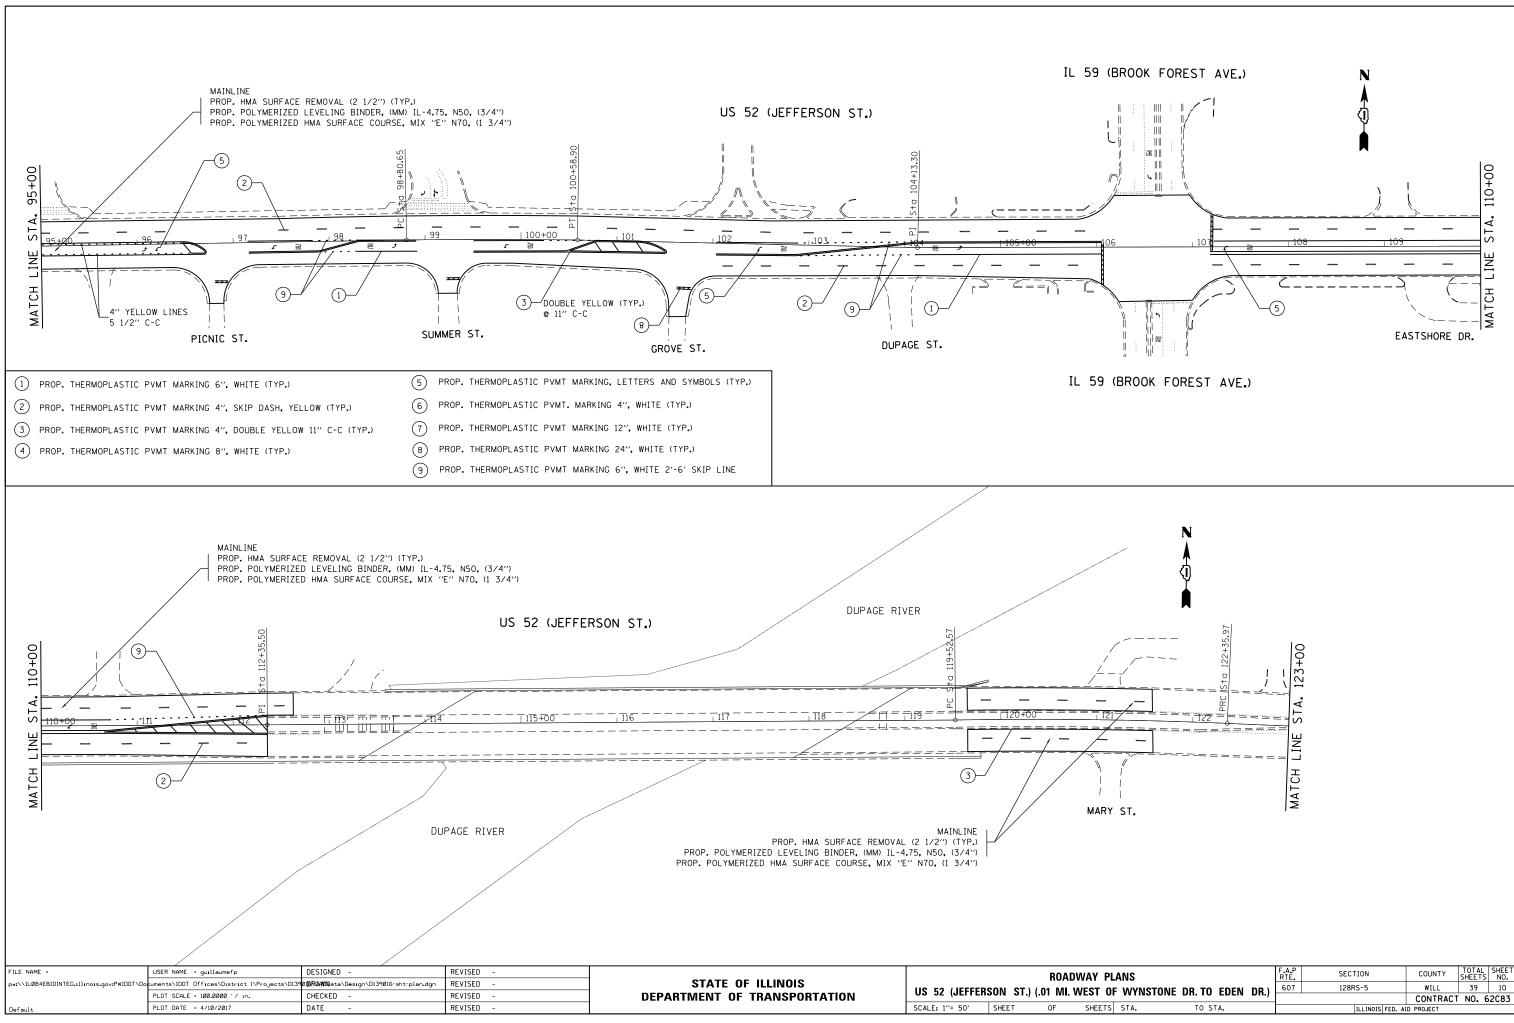


RTE.	SECTION		COUNTY	SHEETS	NO.
607	128RS-5		WILL	39	10
_			CONTRACT	NO. 6	2C83
	ILLINOIS	FED. A	ID PROJECT		
	RTE.	RTE. SECTION 607 128RS-5	RTE. SECTION 607 128RS-5	RTE.SECTIONCOUNTY607128RS-5WILL	RTE. SECTION COUNTY SHEETS 607 128RS-5 WILL 39 CONTRACT NO. 6

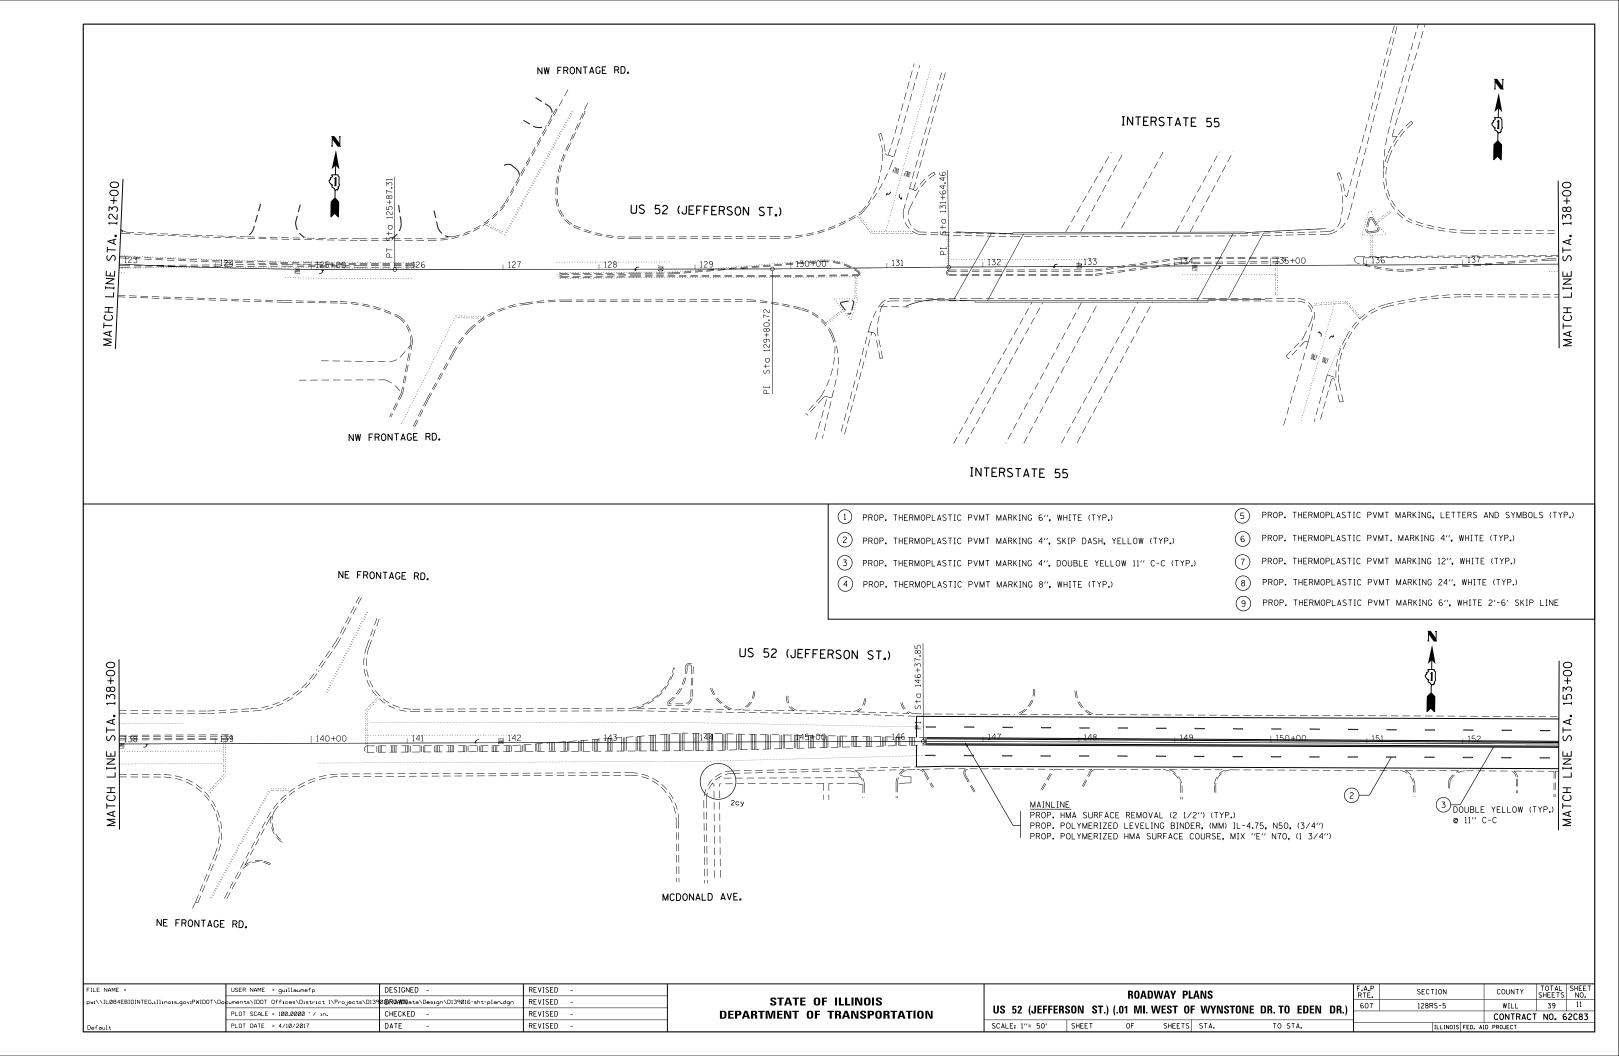


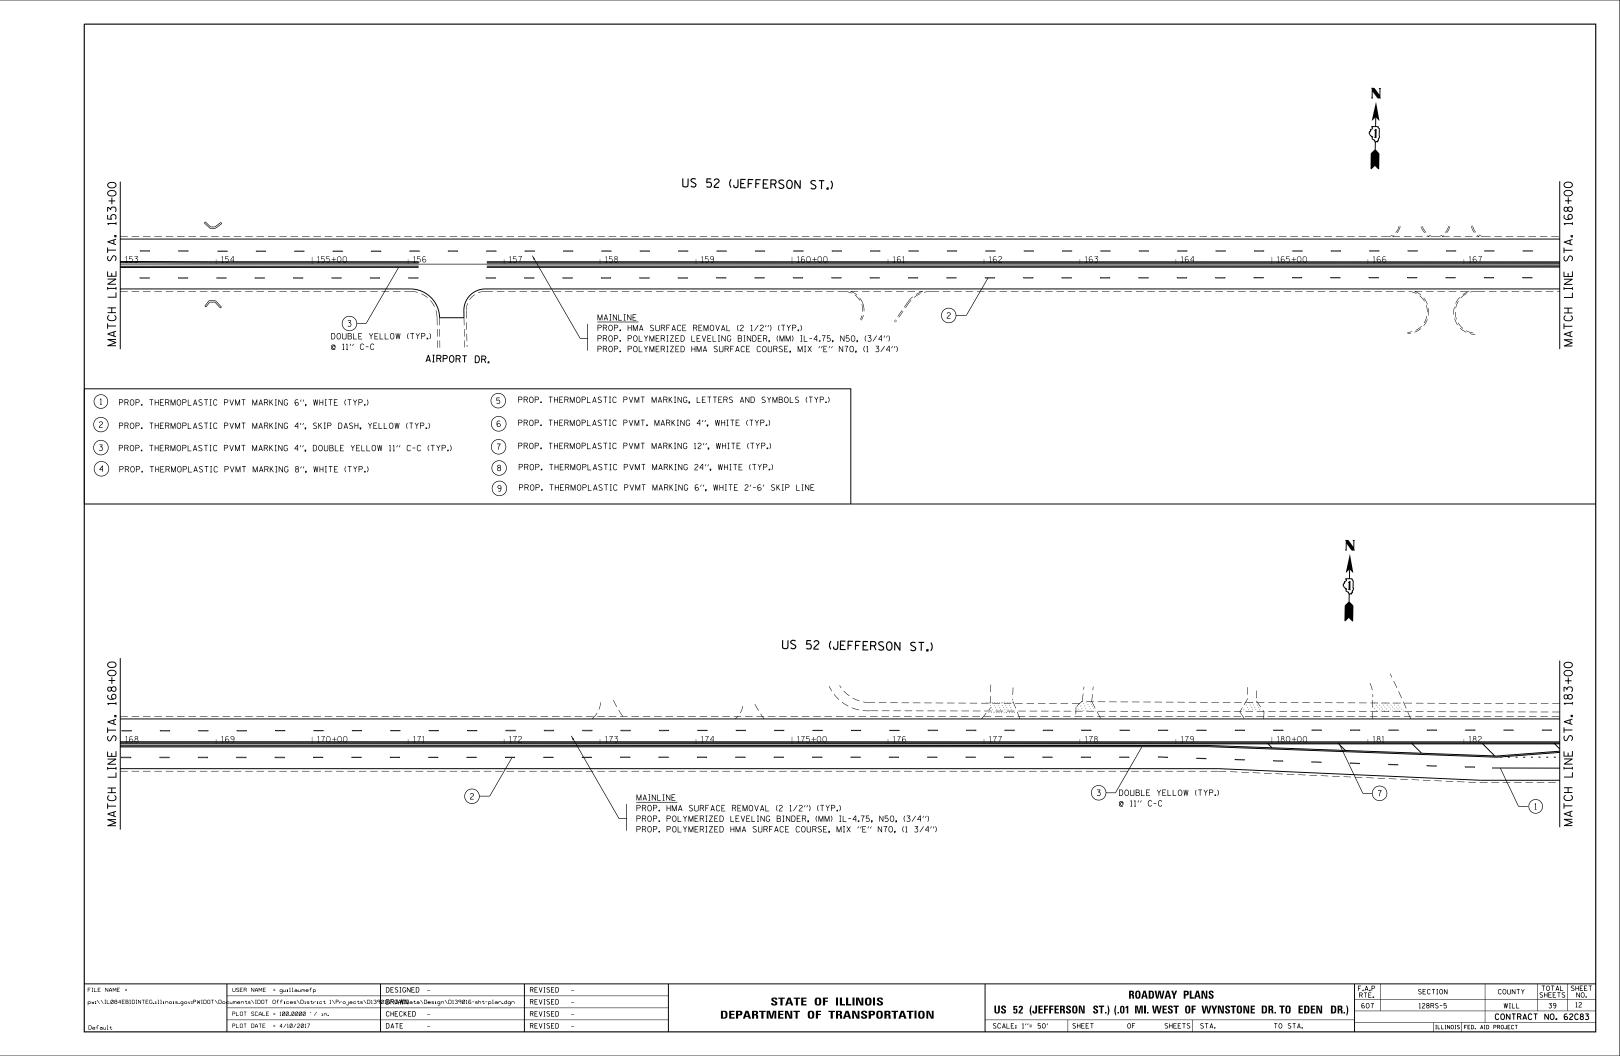

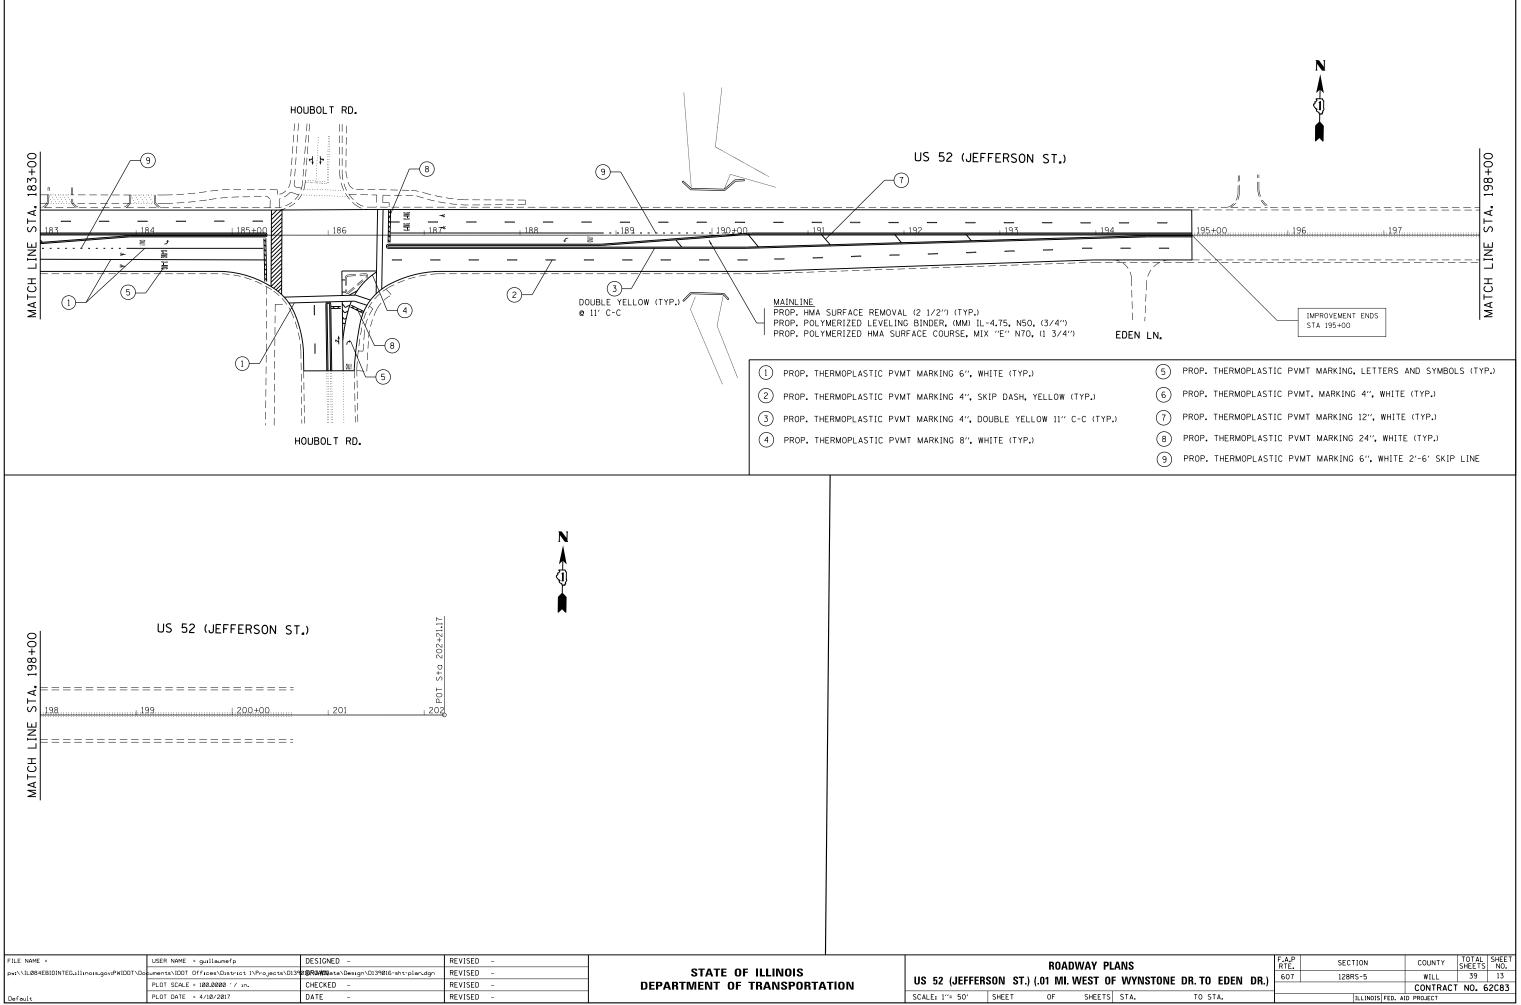



PLANS OF WYNSTONE DR. TO EDEN DR.)		F.A.P RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		WVNSTONE DB TO EDEN DB) 607			39	13
				CONTRACT	NO. 6	2C83
TS STA. TO STA.			ILLINOIS FED. AI	D PROJECT		

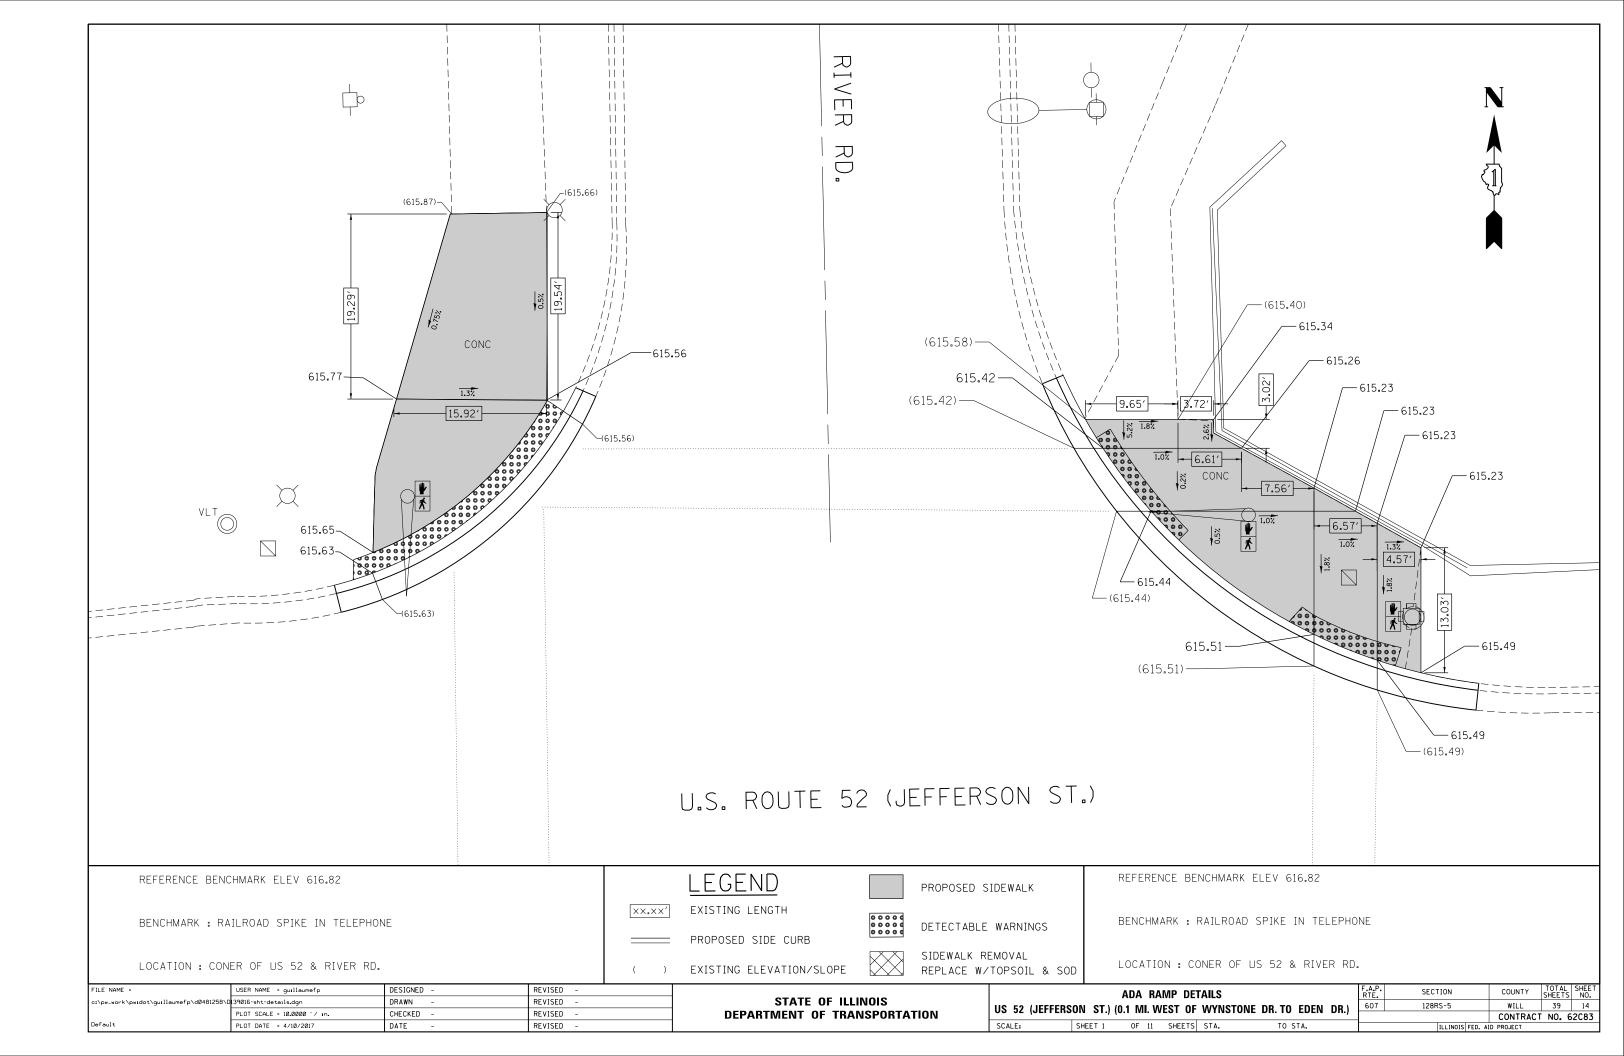


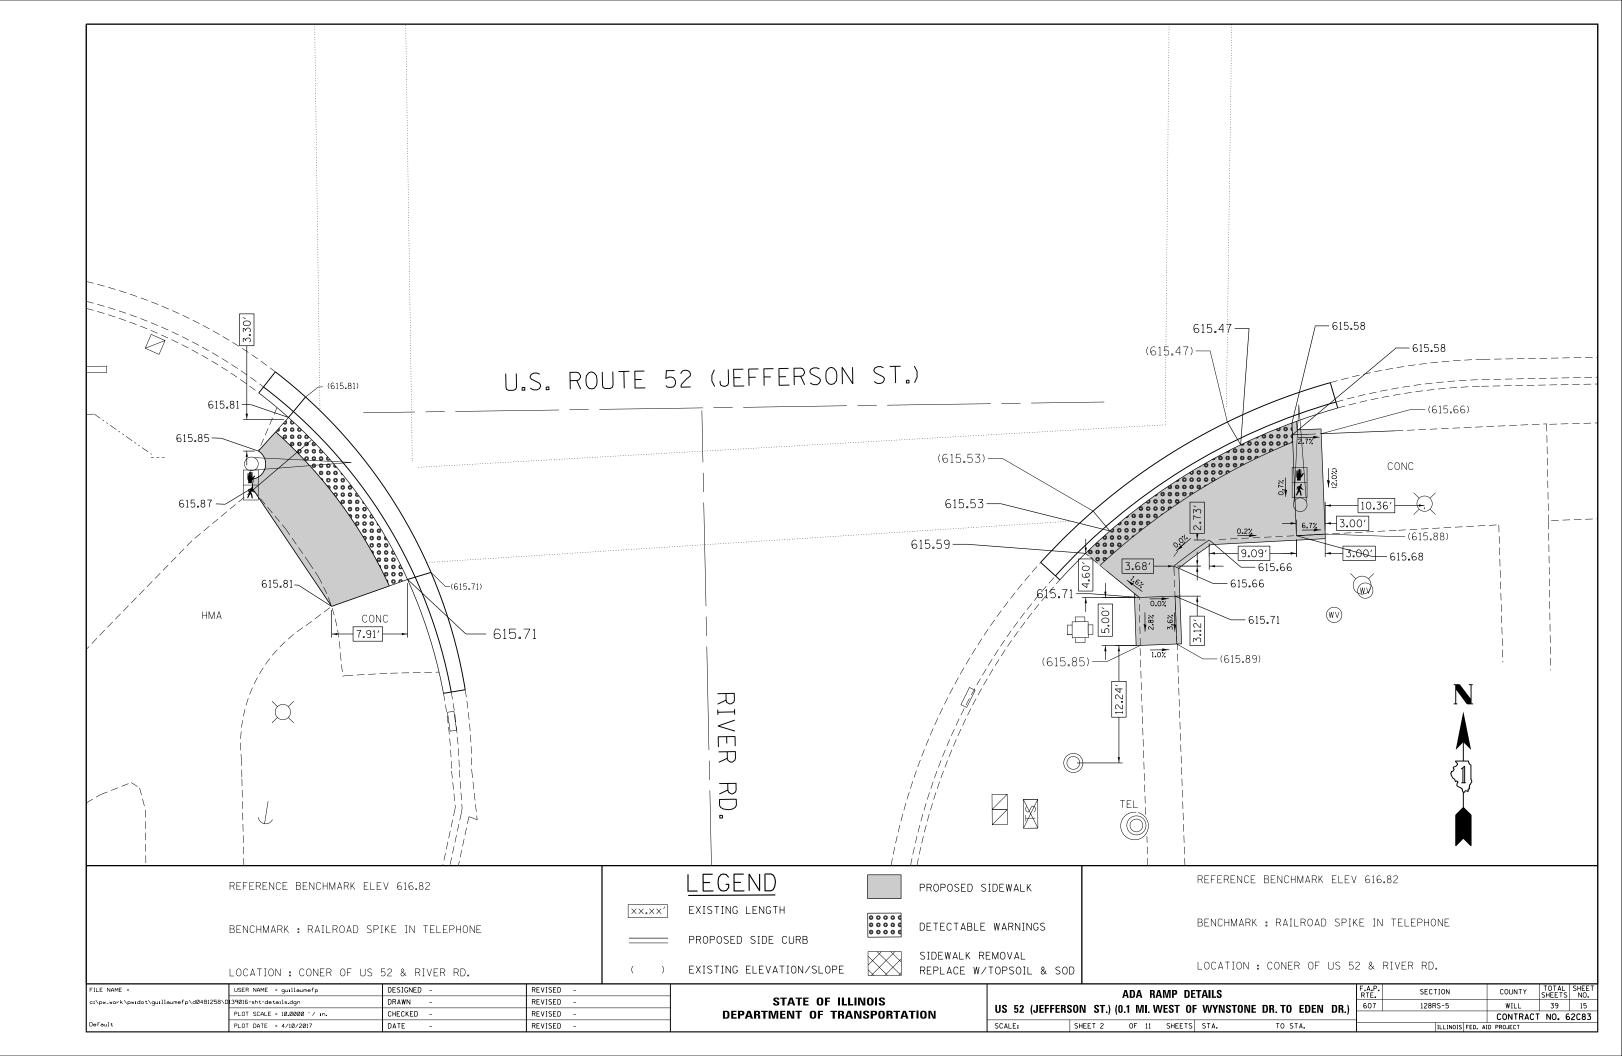


				ROBIN HILL DR.			4.64)				
		Þ ,/				0.67 0.67 (61				CONC S.W.	
	REFERENCE BENCHMARK ELEV 614.21 BENCHMARK : STAINLESS ROD SURVE		OUTE 52	2 (JE 	FFERSON ST.)		ROPOSED SIDEWALK ETECTABLE WARNINGS		HMARK ELEV 614.21	VEY MARKER IN SLEEVE	
FILE NAME c:\pw_work` Default	LOCATION : 60 FT. EAST OF ROBIN = USER NAME = guilloumefp d0481258\D[39016-sht-details.dgn PLOT SCALE = 10.0000 // nn. PLOT DATE = 4/10/2017	HILL DR. DESIGNED - DRAWN - CHECKED - DATE -	REVISED - REVISED - REVISED - REVISED -	()	EXISTING ELEVATION/SLOPE STATE OF ILL DEPARTMENT OF TRA			ADA RAMP DETAILS T.) (0.1 MI. WEST OF WYNSTONE		HILL DR. F.A.P. SECTION 607 128RS-5	COUNTY TOTAL SHEET SHEETS NO. WILL 39 16 CONTRACT NO. 62C83

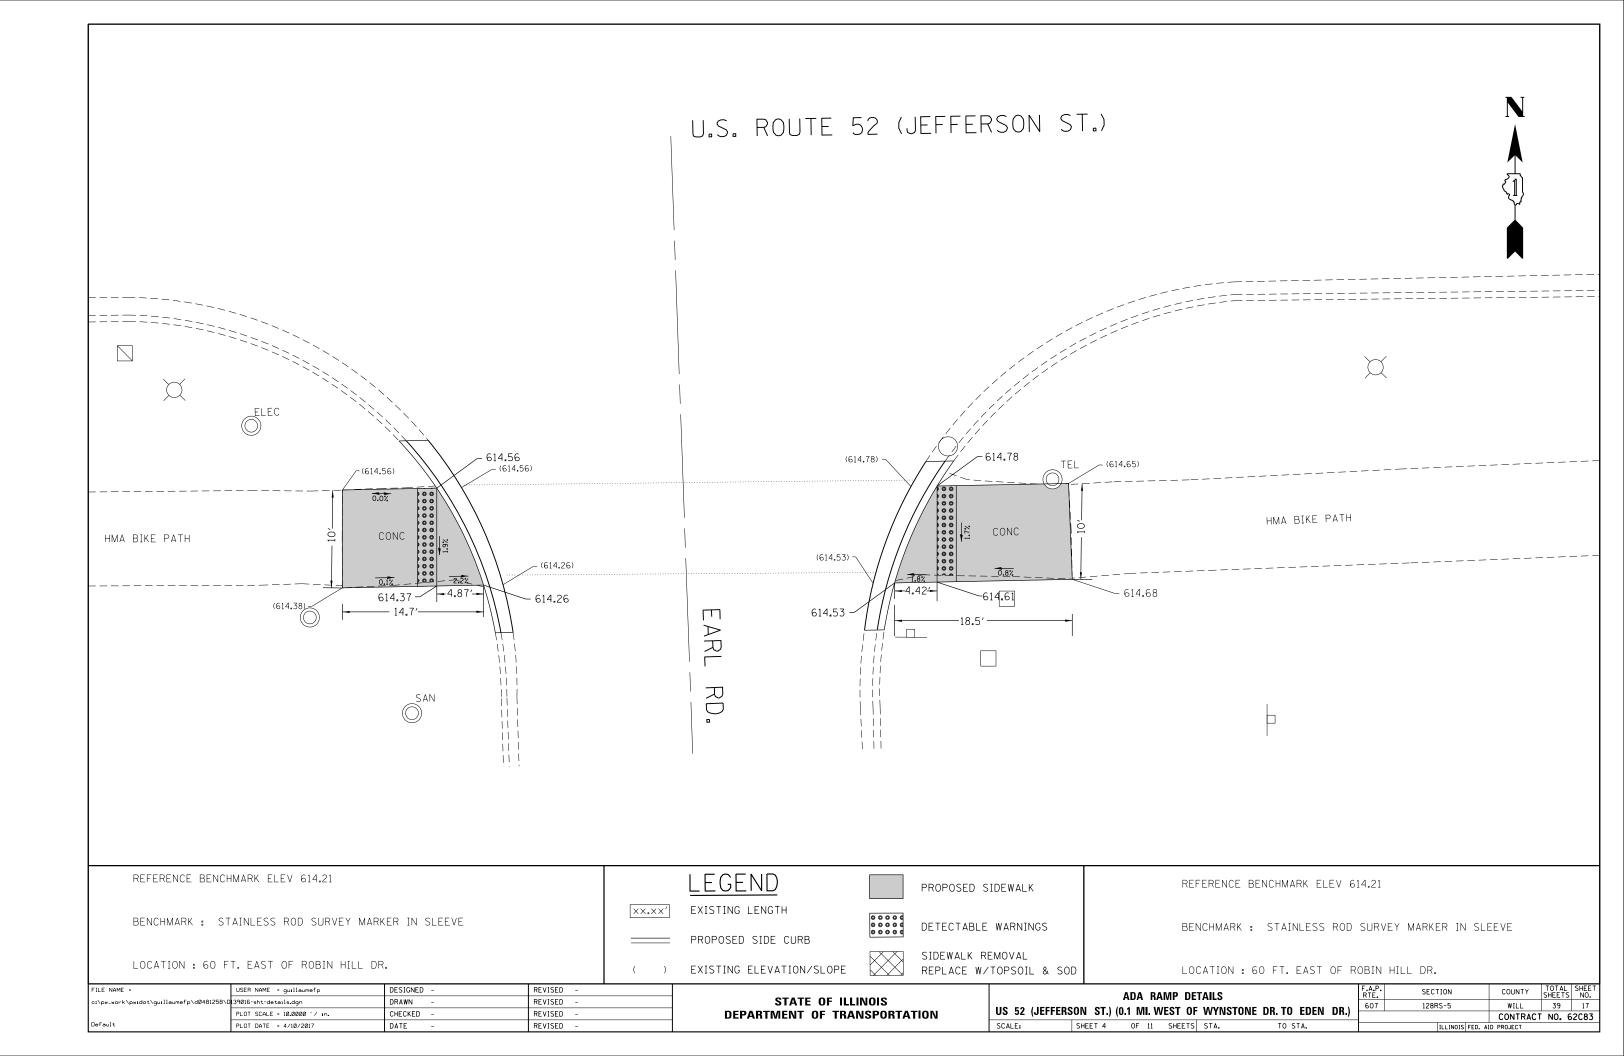


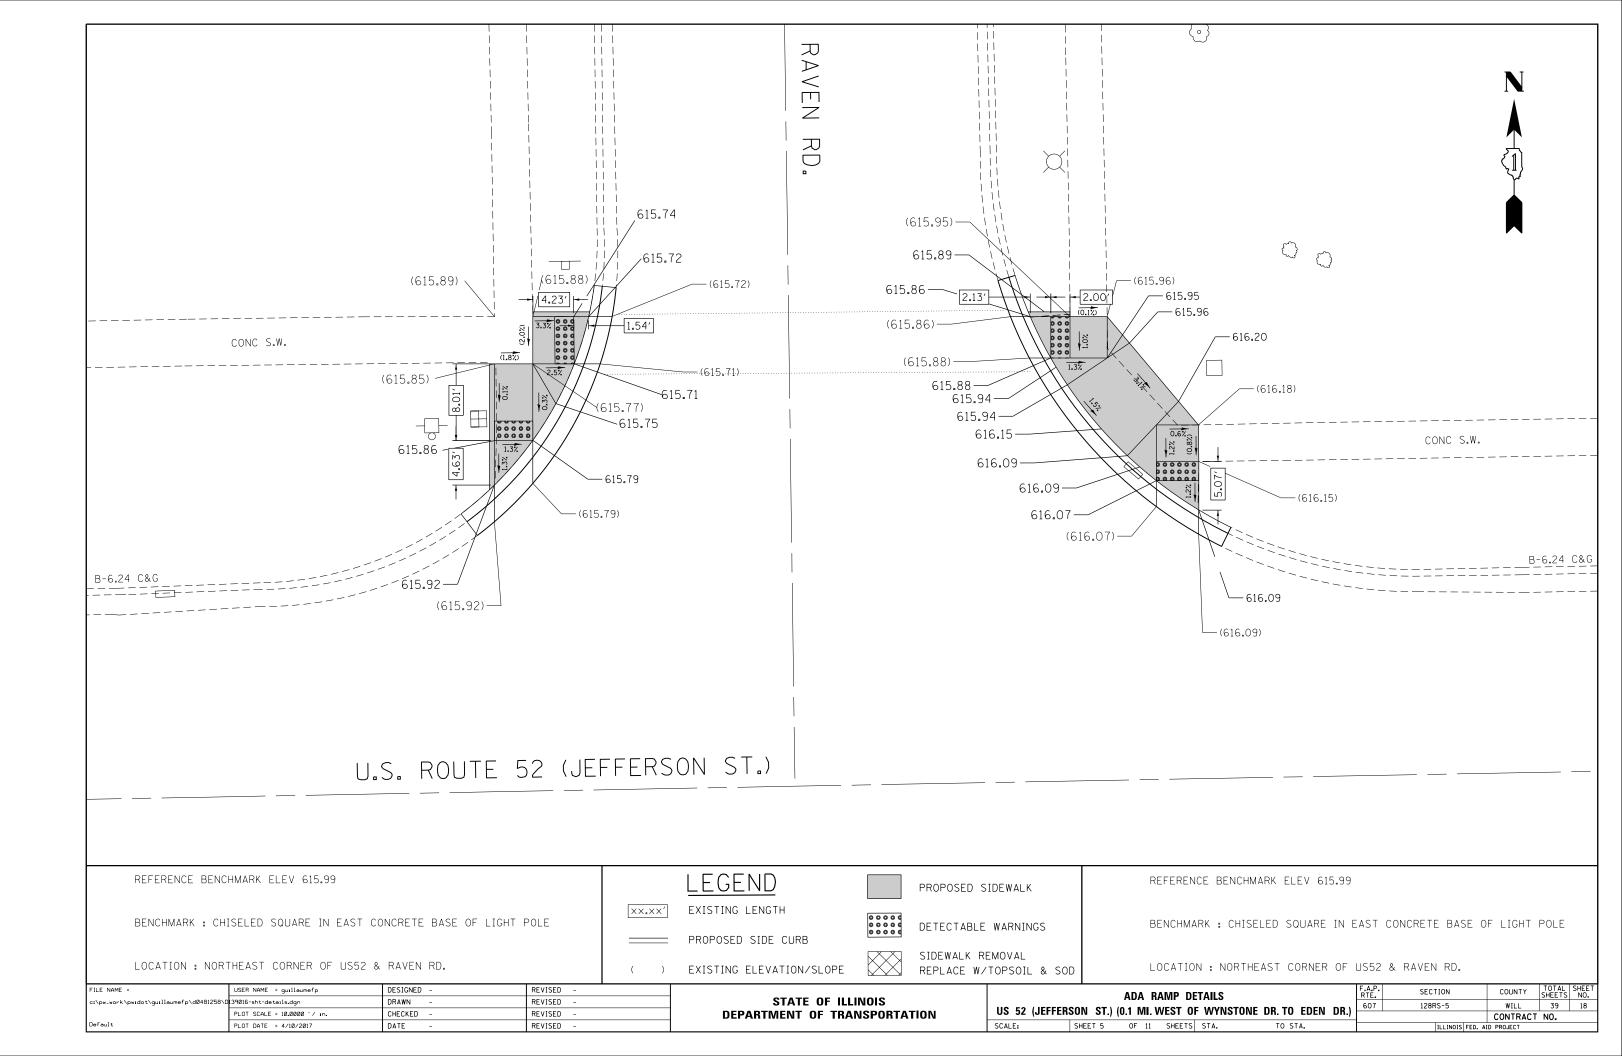


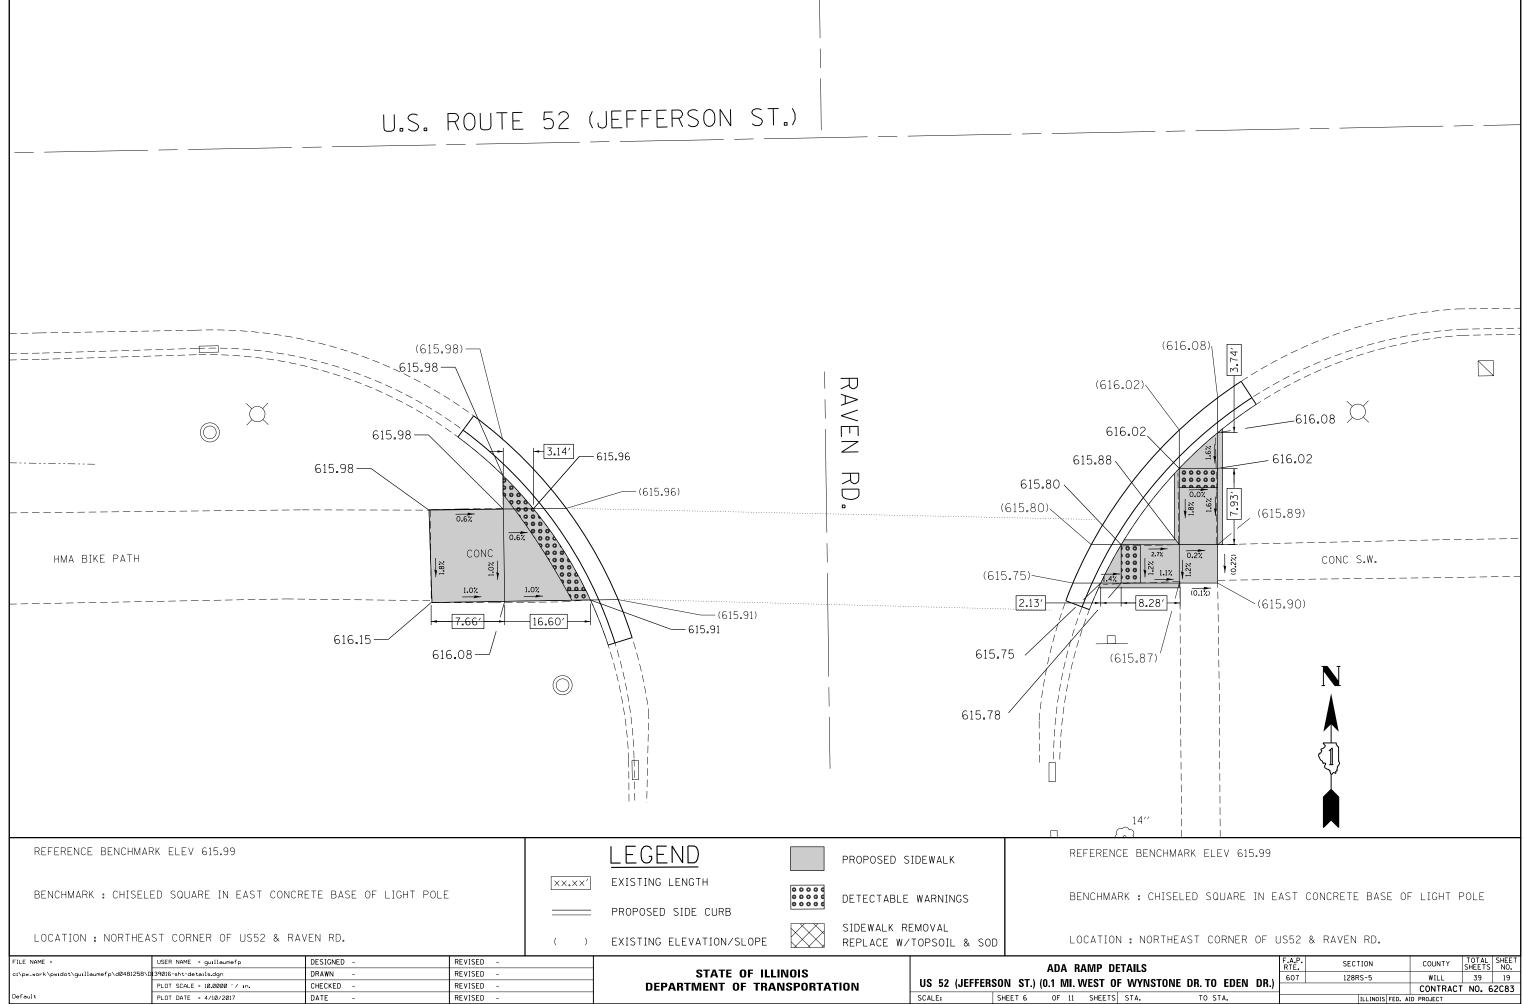

n	OF WYNSTONE DR. TO EDEN DR.)		128RS-5	WILL	39	19
_	WINSIONE DR. TO EDEN DR.			CONTRACT	NO. 6	52C83
S	STA. TO STA.		ILLINOIS FED.	ID PROJECT		

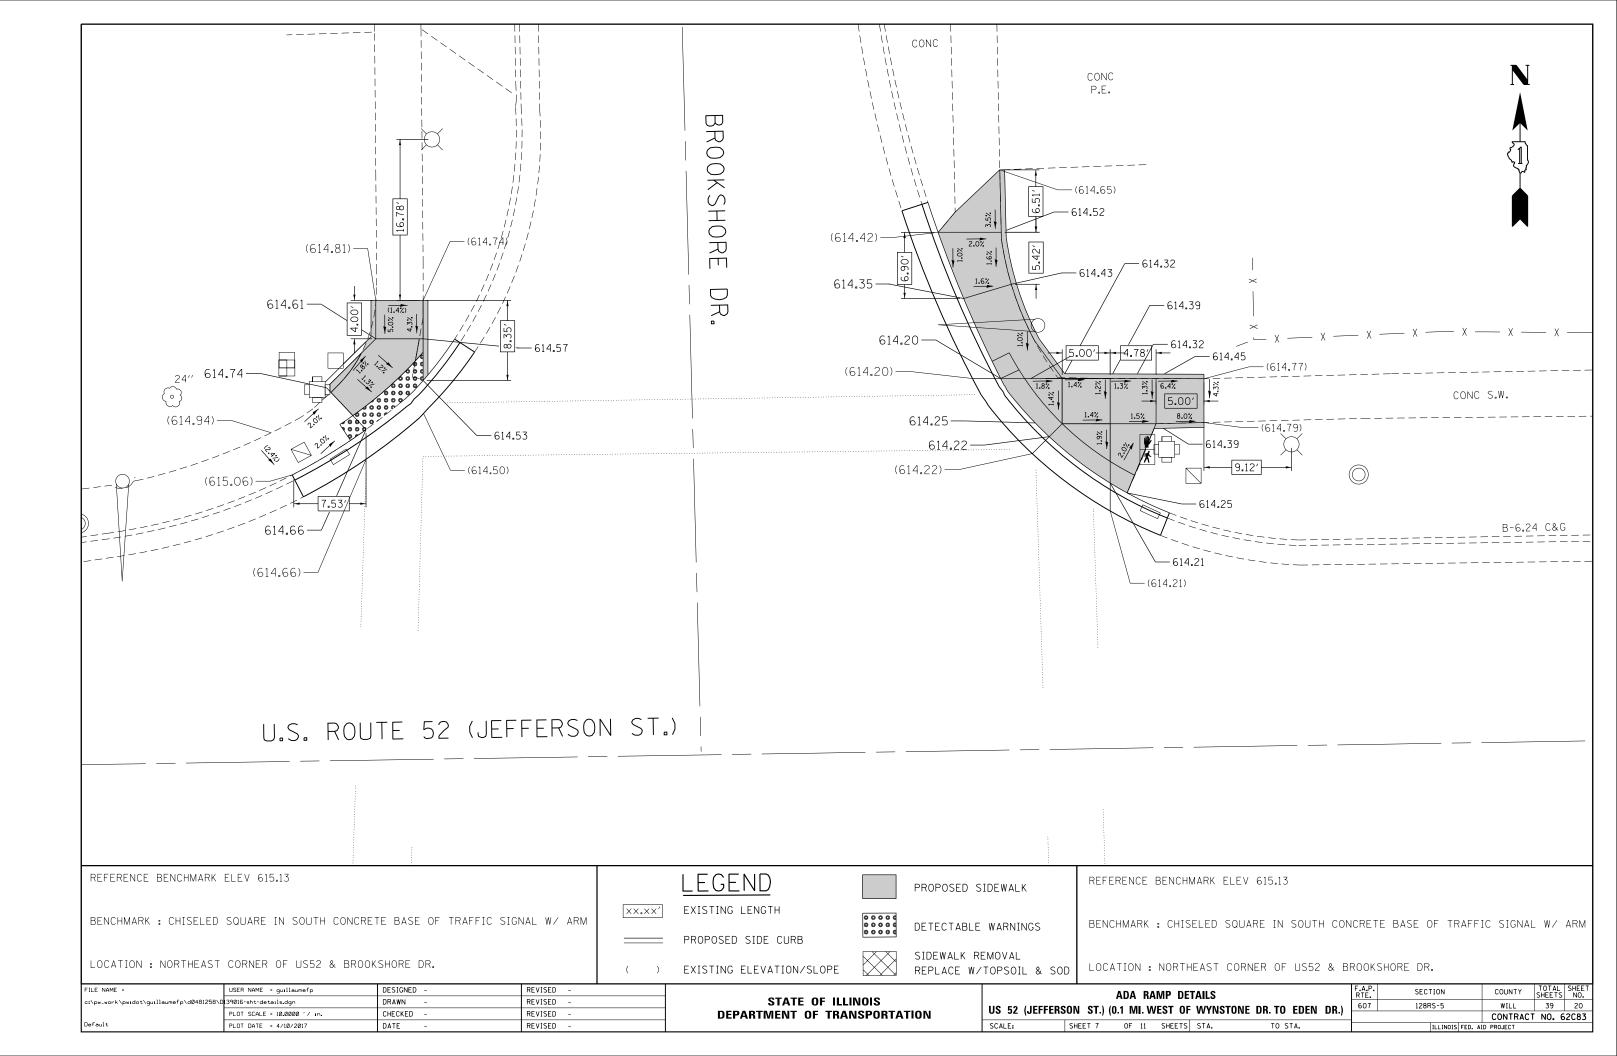

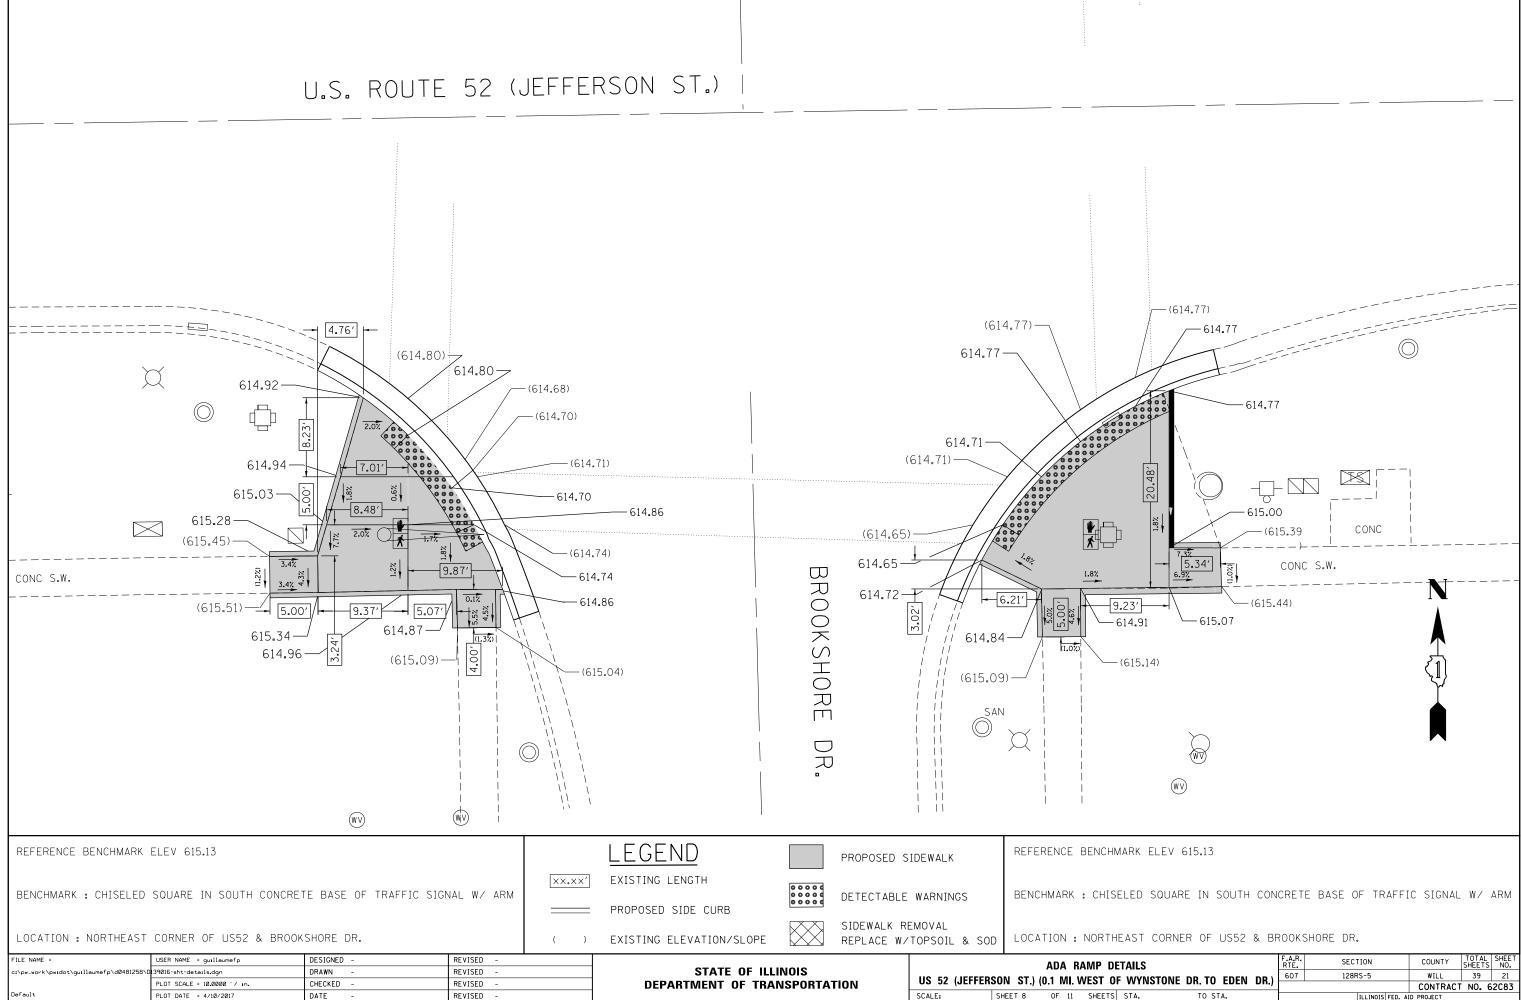

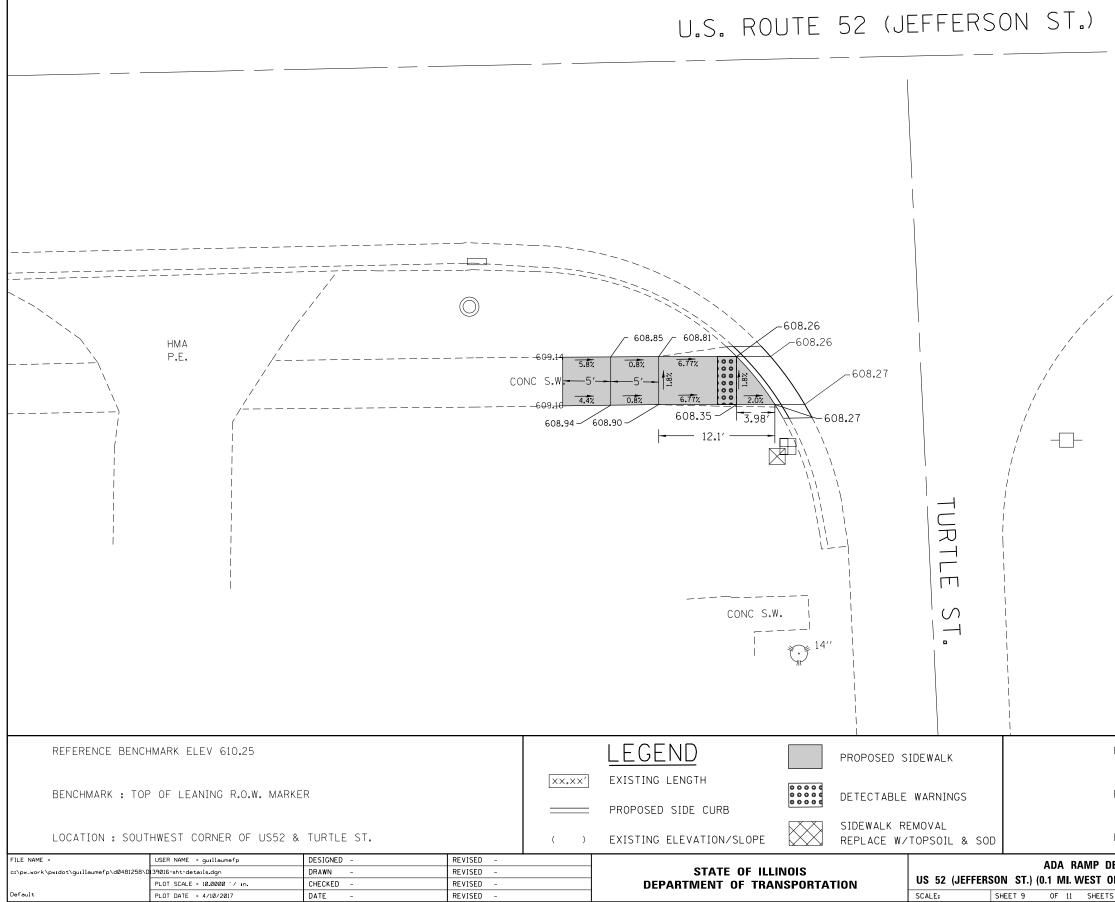


REFERENCE BENCHMARK ELEV 610.25


BENCHMARK : TOP OF LEANING R.O.W. MARKER

LOCATION : SOUTHWEST CORNER OF US52 & TURTLE ST.

DE.	DETAILS		F.A.P. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.		
ΛF	WVNSTONE		EDEN	DR.)	607	128RS-5	WILL	39	22
OF WYNSTONE DR. TO EDEN DR.)				Dn.,			CONTRACT	NO. 6	2C83
TS	STA.	TO ST	ΓΑ.		ILLINOIS FED. AID PROJECT				


Ν

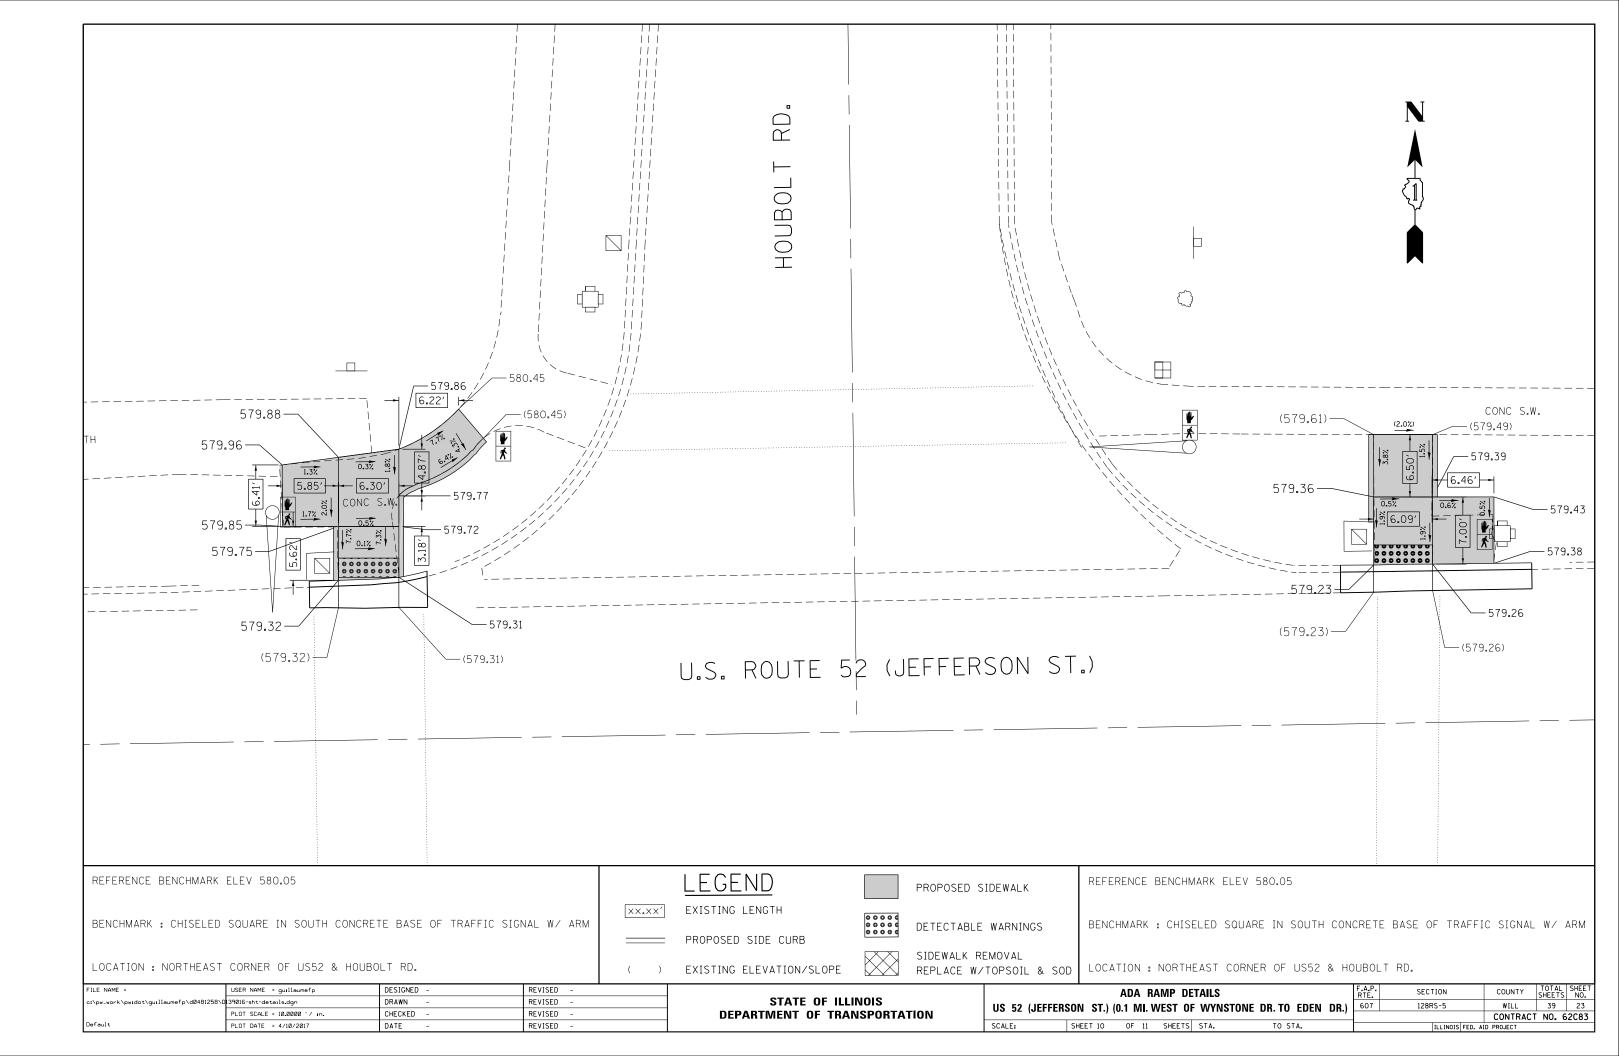

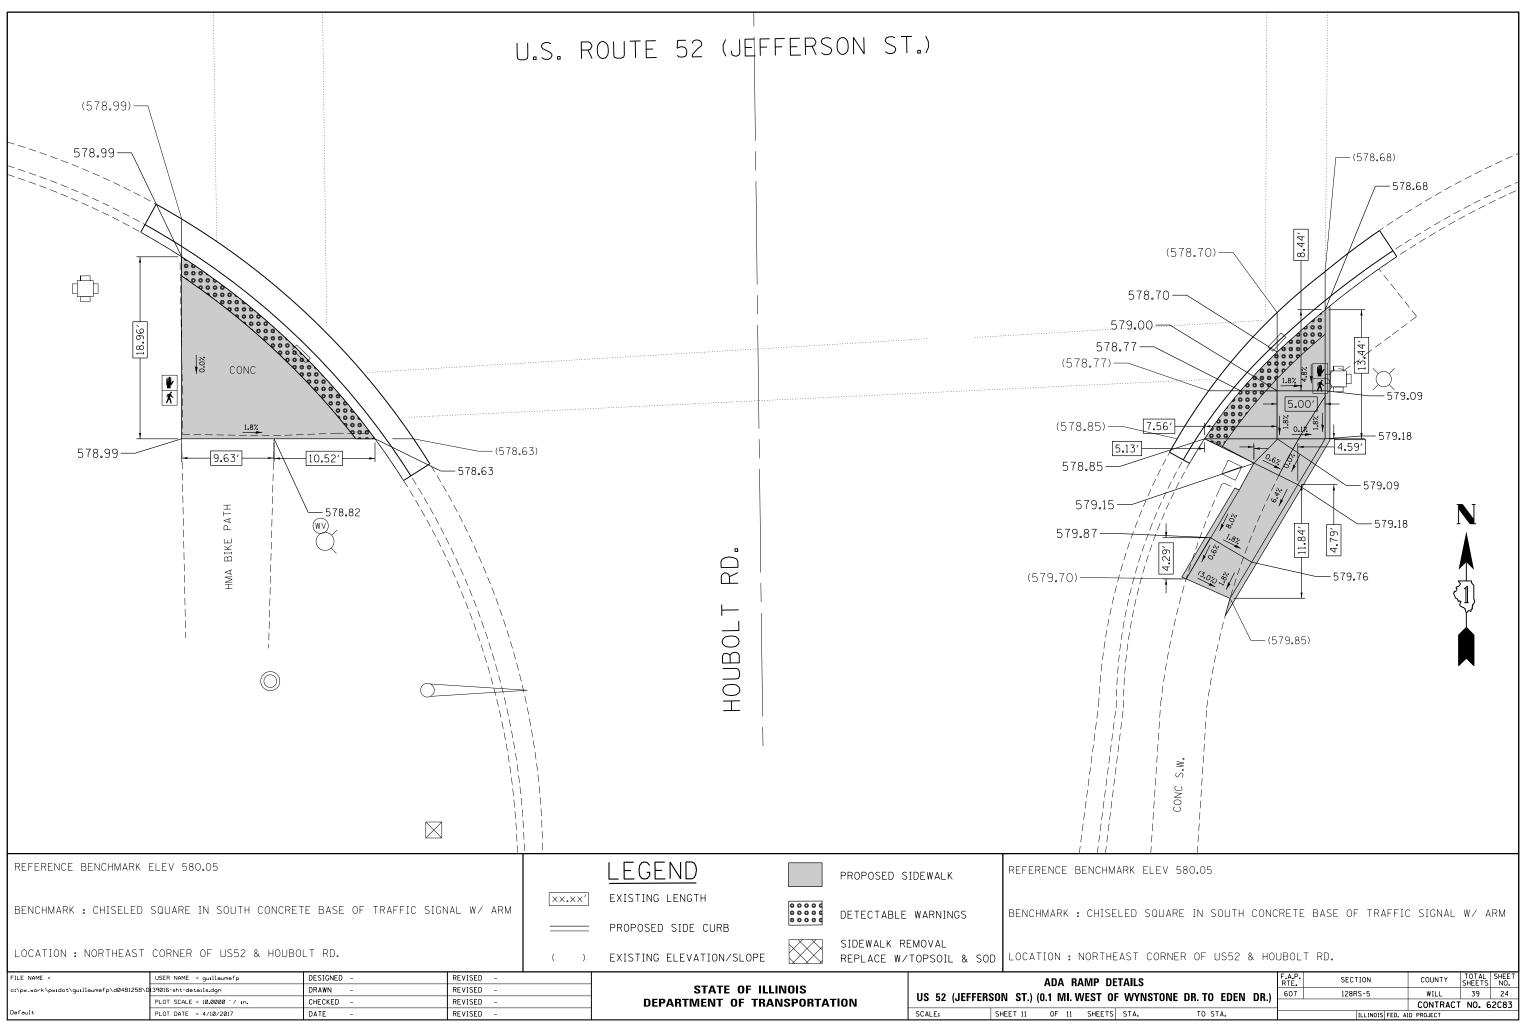



DETAILS	F.A.P. RTE.	SECTION	


DE	DETAILS				SECTION	COUNTY	SHEETS	NO.
OF	WYNSTONE	DR TO EDEN	DR.)	607	128RS-5	WILL	39	24
						CONTRACT	NO. 6	2C83
TS	STA.	TO STA.			ILLINOIS FED. A	ID PROJECT		

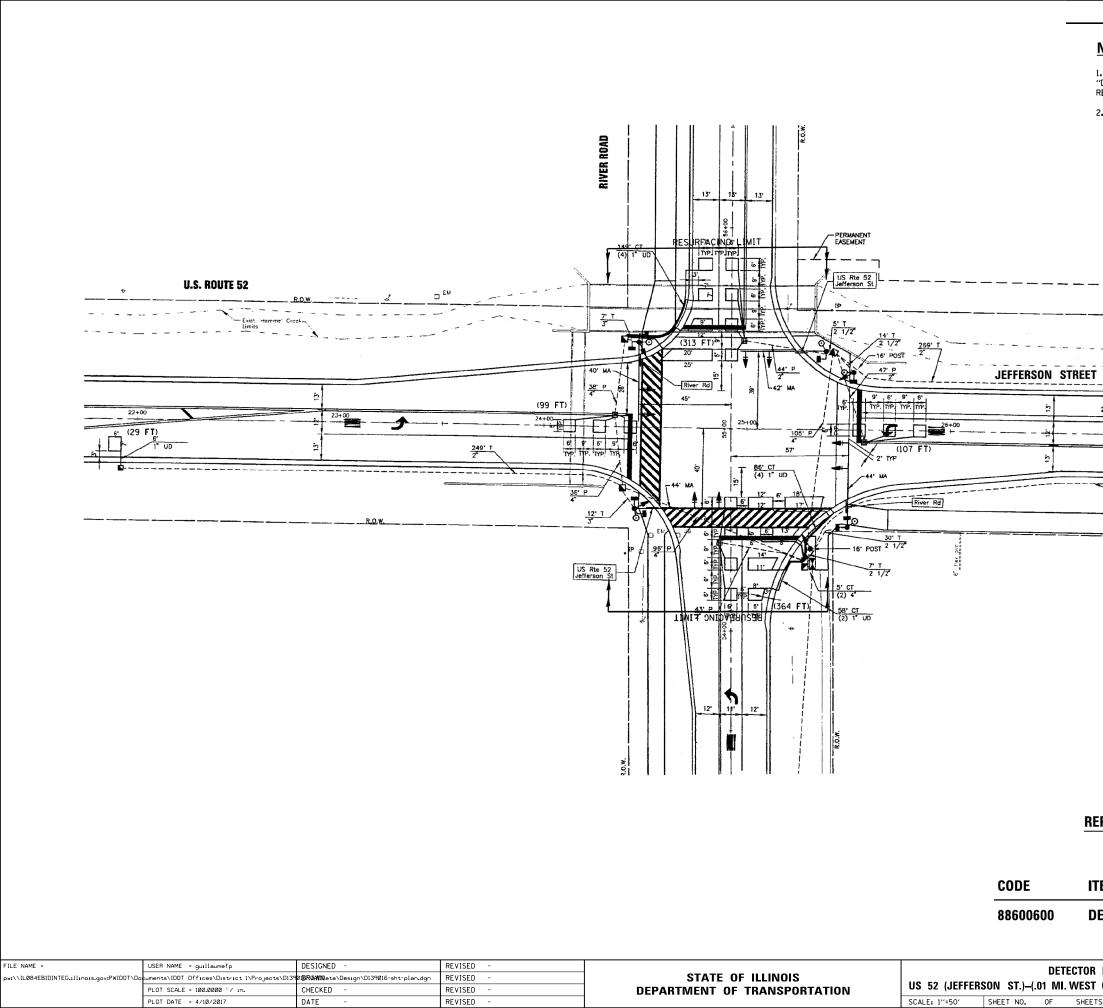


)TES:		
ORK SHALL MEET THE REQUIREMENTS OF THE TECTOR LOOP REPLACEMENT AND/OR INSTALL/ URFACING & PATCHING OPERATIONS.		
HIS PLAN IS FOR THE SOLE PURPOSE OF DE	ECTOR LOOP REPLA	CEMENT.
R.O.W.		
A.M.		_
(97)	UD i 6	
27+00	28+00	9_FT) _
		=
- PROPOSED INTERCONNECT TO BROOKSHORE DRIVE SEE INTERCONNECT PLAN		
······································		
BICYCLE PATH	ROUTE 52	-
and the second		
NEXT REALTY	>	
	N T	
	N	
	L I	
	A	
ζ	,1 }	
	Ý	
AAE ALL DETENTOR LOODA AA		
ACE ALL DETECTOR LOOPS AS WITHIN THE RESURFACING LIN		
1	QUANTITY	UNIT
CTOR LOOP REPLACEMENT	941	FOOT
UTUN LUUI NLILAULIVILIVI	341	
[m]		
JP F.A.U WVNSTONE DB TO EDEN DB.) 1954	SECTION 128RS-5	COUNTY TOTAL SHEET WILL 39
WYNSTONE DR. TO EDEN DR.) 1354 STA. TO STA.	ILLINOIS FED.	CONTRACT NO.
	presidents (ED)	

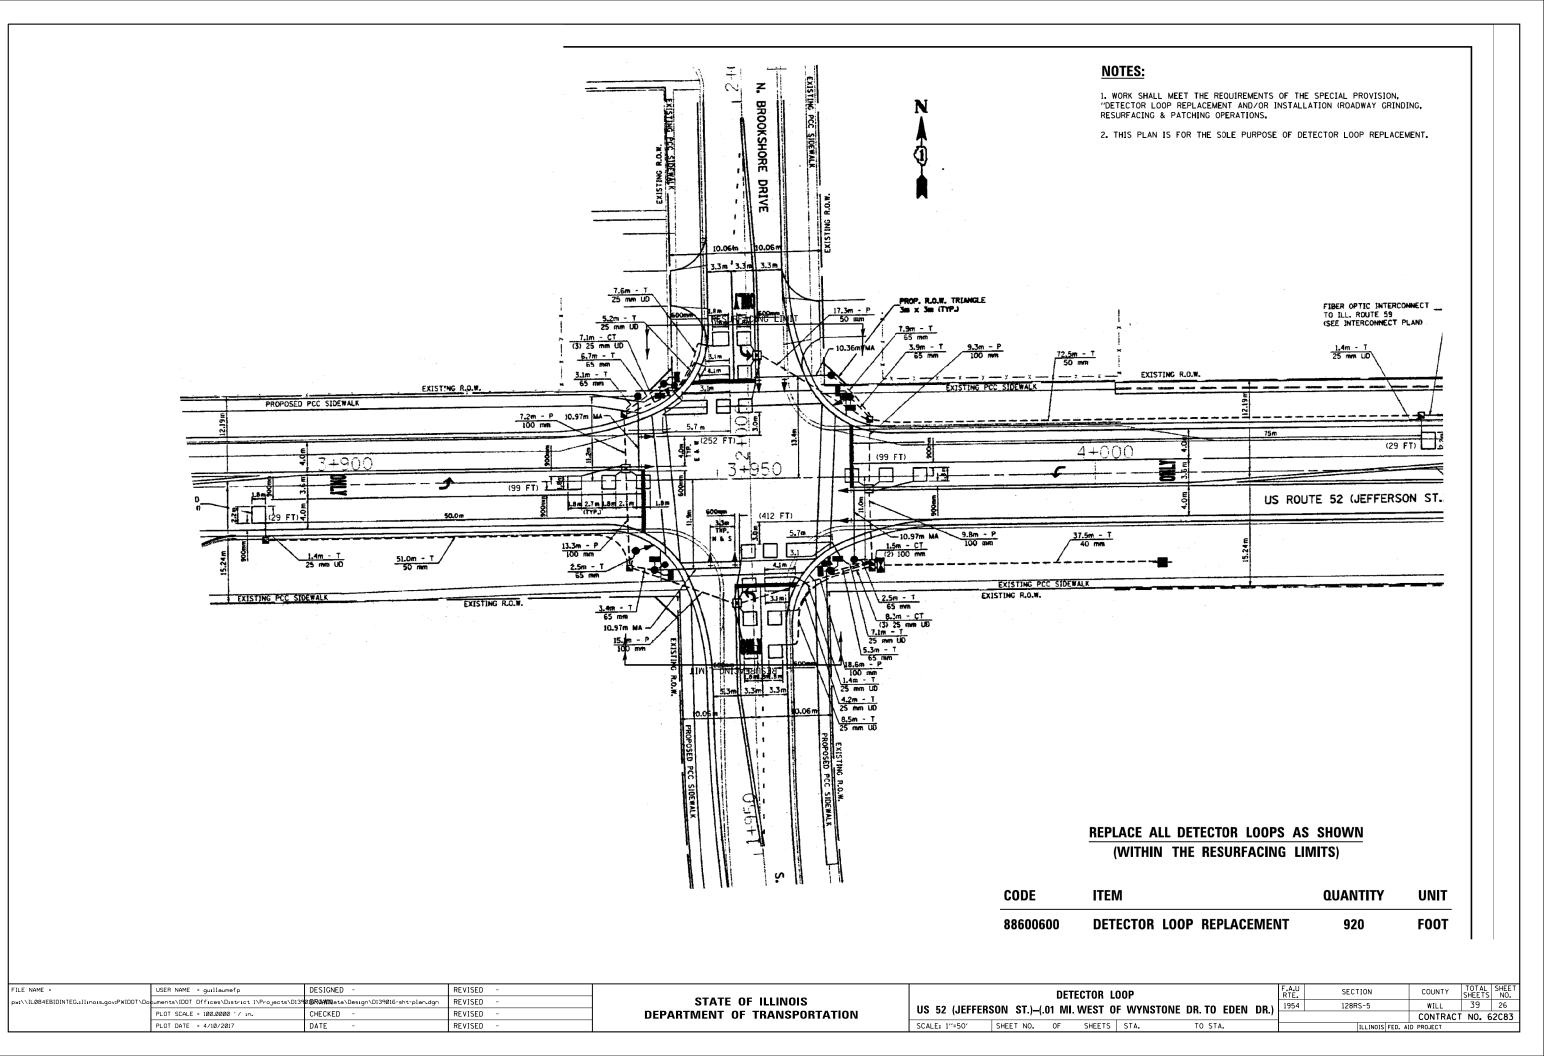

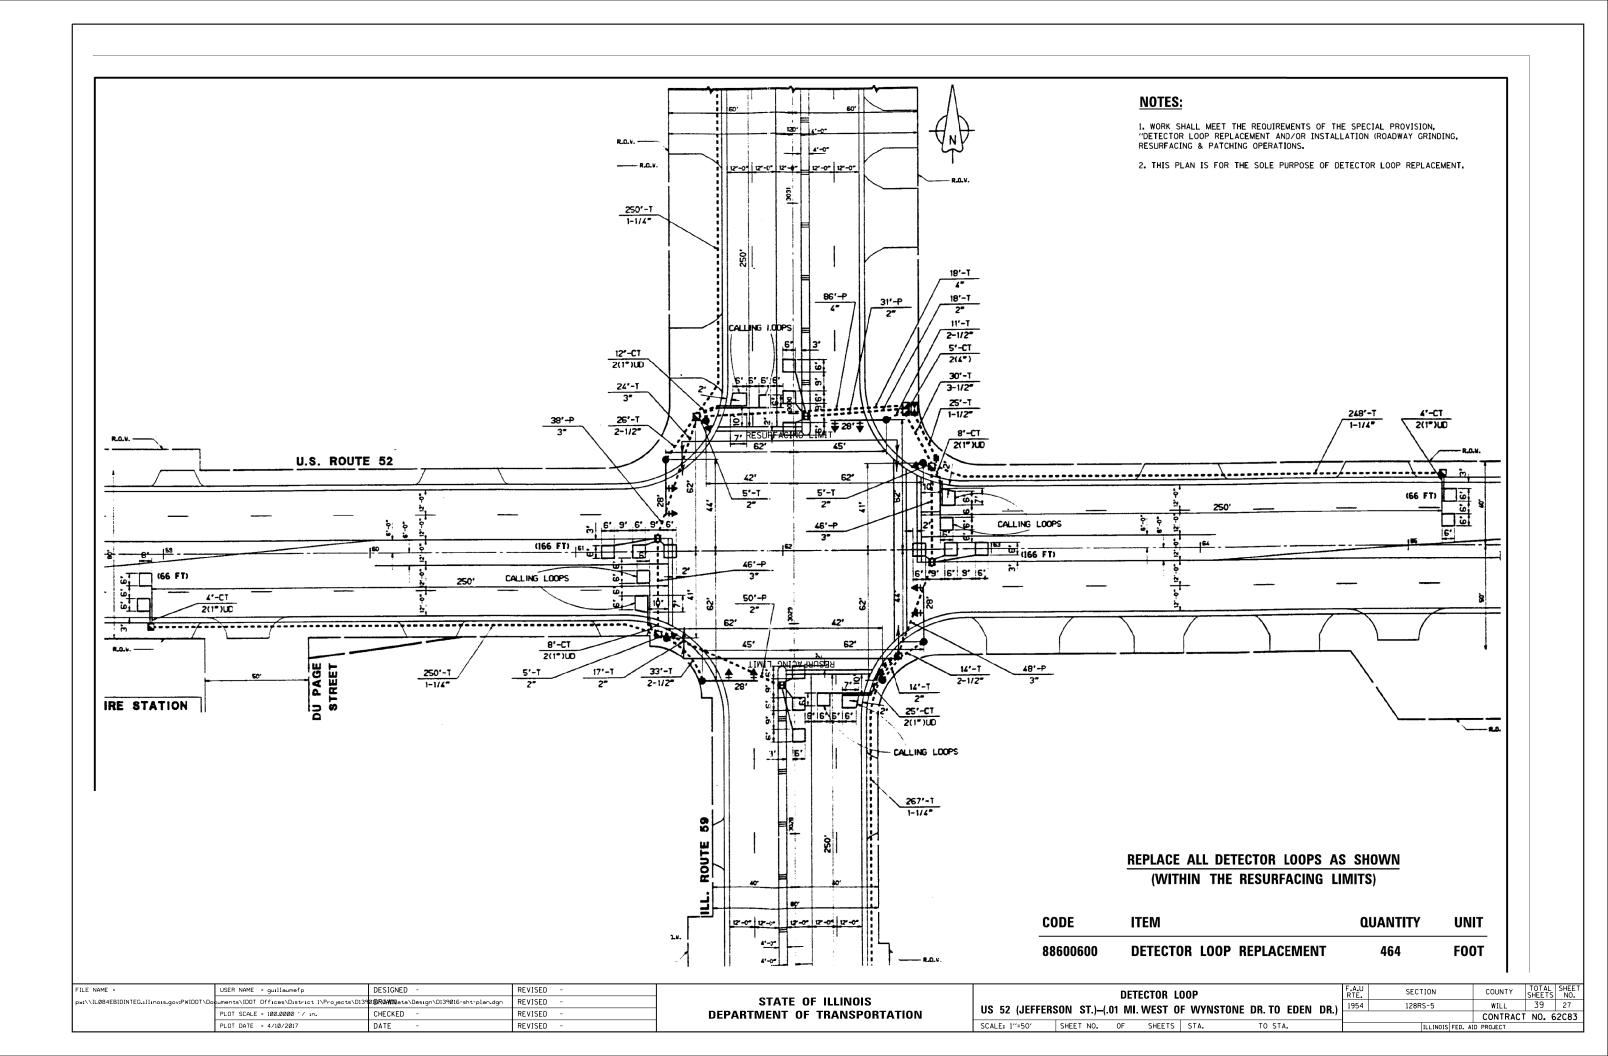

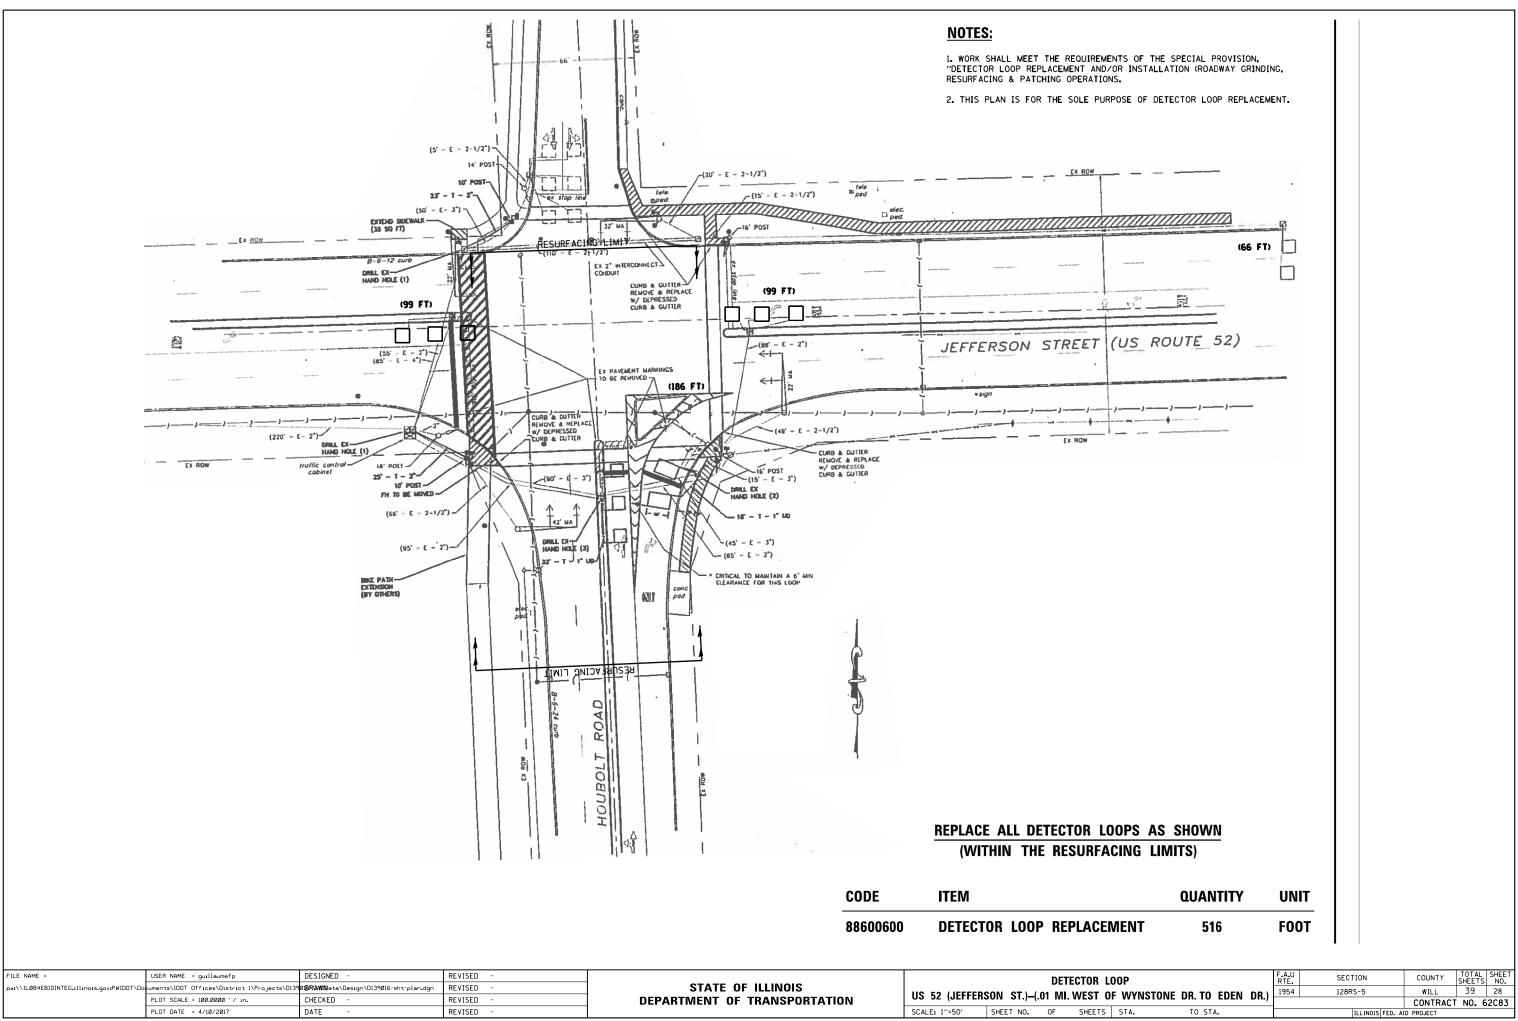

L	LOOP		RTE SECTION		COUNTY	SHEETS	NO.			
n	OF WYNSTONE DR. TO EDEN DR.)				1954	128RS-5		WILL	39	28
UF WINSIONE DR. TU EDEN DR.)							CONTRACT	NO. 6	2083	
s	STA.	TO S	TA.		ILLINOIS FED. AID PROJECT					

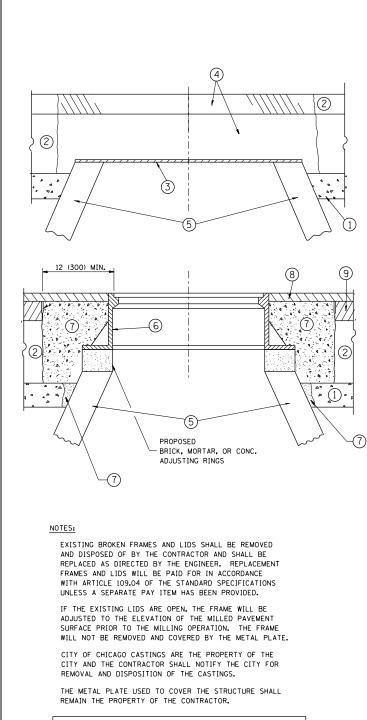

WHEN STRUCTURES ARE TO BE ADJUSTED OR RECONSTRUCTED, THE LOWERING AND RAISING OF THE FRAMES AND LIDS WILL NOT BE PAID FOR SEPARATELY BUT WILL BE INCLUDED IN THE COST OF THE CORRESPONDING PAY ITEM.

DETAILS FOR FRAMES AND LIDS ADJUSTMENT WITH MILLING

FILE NAME =	USER NAME = guillaumefp	DESIGNED - R. SHAH	REVISED	- R. WIEDEMAN 05-14-04			DETAILS FOR	F.A.P.	SECTION	COUNTY	TOTAL SHEET
pw://ILØ84EBIDINTEG.1111no1s.gov:PWIDOT/D	cuments/IDOT Offices/District 1/Projects/D13	016RGAWINata\Design\Diststd.dgn	REVISED	- R. BORO 01-01-07	STATE OF ILLINOIS			607	128RS-5	WILL	39 29
	PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED	- R. BORO 03-09-11	DEPARTMENT OF TRANSPORTATION	FRAMES AND LIDS ADJUSTMENT WITH MILLING			BD600-03 (BD-8)	CONTRACT	T NO. 62C83
	PLOT DATE = 4/10/2017	DATE - 10-25-94	REVISED	- R. BORO 12-06-11		SCALE: NONE	SHEET NO. 1 OF 1 SHEETS STA. TO STA.	FED. ROA	D DIST. NO. 1 ILLINOIS FED. A	AID PROJECT	

CONSTRUCTION PROCEDURES

STAGE 1 (BEFORE PAVEMENT MILLING)

- A) REMOVE A MINIMUM OF 12 (300) OF THE PAVEMENT FROM AROUND THE STRUCTURE. B) REMOVE THE EXISTING FRAME AND LID FROM THE STRUCTURE.
- C) COVER THE STRUCTURE OPENING WITH A 36 (900) DIAMETER METAL PLATE. D) BACKFILL WITH CRUSHED STONE AND A MINIMUM 1^{\prime}_{2} (40)
- THICK HMA SURFACE MIX APPROVED BY THE ENGINEER.

STAGE 2 (AFTER PAVEMENT MILLING)

- A) REMOVE THE HMA SURFACE MIX AND CRUSHED STONE.
- B) INSTALL THE FRAME AND LID; ADJUST THE FRAME TO ITS FINAL SURFACE ELEVATION.
- C) THE SURROUNDING SPACE SHALL BE FILLED WITH CLASS PP-1* CONCRETE TO THE ELEVATION OF THE SURFACE OF THE EXISTING BASE COURSE OR THE BINDER COURSE.
- * UNLESS OTHERWISE SPECIFIED IN THE PLANS.

THE PROCEDURE EXPLAINED ABOVE SHALL CONFORM TO THE APPLICABLE PORTIONS OF SECTIONS 353, 406, 602, AND 603 OF THE STANDARD SPECIFICATIONS EXCEPT THAT "THE CONTRACTOR SHALL ADJUST THE STRUCTURES TO THE FINISHED PAVEMENT ELEVATION NO MORE THAN 5 CALENDAR DAYS PRIOR TO PLACEMENT OF THE FINAL LIFT OF SURFACE UNLESS APPROVED BY THE ENGINEER."

LEGEND

1	SUB-BASE GRANULAR MATERIAL	6 FRAME AND LID (SEE NOTES)
2	EXISTING PAVEMENT	(7) CLASS PP-1* CONCRETE
3	36 (900) DIAMETER METAL PLATE	(8) PROPOSED HMA SURFACE COURSE
4	PROPOSED CRUSHED STONE AND HMA SURFACE MIX	-
(5)	EXISTING STRUCTURE	9 PROPOSED HMA BINDER COURSE

(5) EXISTING STRUCTURE

LOCATION OF STRUCTURES:

THE CONTRACTOR WILL BE REQUIRED TO KEEP A RECORD OF THE LOCATIONS OF THE BURIED STRUCTURES ACCORDING TO THE STATION AND DISTANCE LEFT OR RIGHT OF THE CENTERLINE OF PAVEMENT. UPON COMPLETION OF THE WORK, THE CONTRACTOR WILL DELIVER THE RECORD TO THE ENGINEER.


BASIS OF PAYMENT:

REMOVING FRAMES AND LIDS ON DRAINAGE AND UTILITY STRUCTURES IN THE PAVEMENT PRIOR TO MILLING, AND ADJUSTING TO FINAL GRADE PRIOR TO PLACING THE SURFACE COURSE, WILL BE PAID FOR AT THE CONTRACT UNIT PRICE EACH FOR "FRAMES AND LIDS TO BE ADJUSTED (SPECIAL)."

THIS WORK WILL NOT BE PAID FOR WHEN DRAINAGE AND UTILITY STRUCTURES ARE SPECIFIED FOR PAYMENT AS STRUCTURE RECONSTRUCTION.

NEW FRAMES AND LIDS, WHEN SPECIFIED, WILL BE PAID FOR SEPARATELY.

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) (UNLESS OTHERWISE SHOWN
--	------------------------

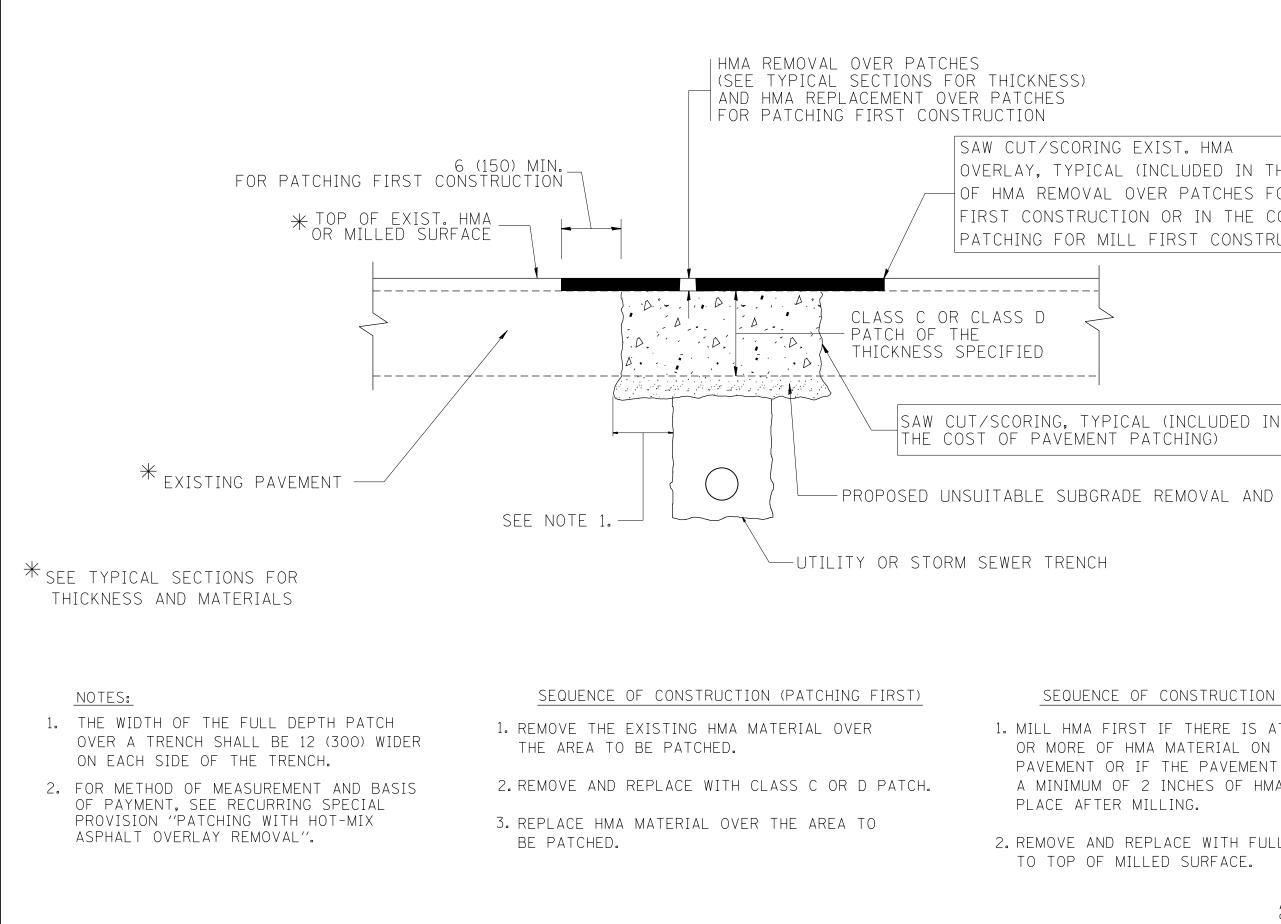

L L								
	FILE NAME =	USER NAME = guillaumefp	DESIGNED - R. SHAH	REVISED - A. ABBAS 04-27-98			PAVEMENT PATCHI	INIC
	pw:\\ILØ84EBIDINTEG.1111no1s.gov:PWIDOT\Do	cuments\IDOT_Offices\District_l\Projects\D134	016R(AND)ata\Design\Diststd.dgn	REVISED - R. BORO 01-01-07	STATE OF ILLINOIS			
		PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED - R. BORO 09-04-07	DEPARTMENT OF TRANSPORTATION		HMA SURFACED PA	AVI
		PLOT DATE = 4/10/2017	DATE - 10-25-94	REVISED - K. ENG 10-27-08		SCALE: NONE	SHEET NO. 1 OF 1 SHEETS	S

OVERLAY, TYPICAL (INCLUDED IN THE COST OF HMA REMOVAL OVER PATCHES FOR PATCHING FIRST CONSTRUCTION OR IN THE COST OF PAVEMENT PATCHING FOR MILL FIRST CONSTRUCTION).

PROPOSED UNSUITABLE SUBGRADE REMOVAL AND REPLACEMENT

SEQUENCE OF CONSTRUCTION (MILLING FIRST)

TO STA.


STA.

1. MILL HMA FIRST IF THERE IS AT LEAST $4\frac{1}{2}$ INCHES OR MORE OF HMA MATERIAL ON TOP OF THE EXISTING PAVEMENT OR IF THE PAVEMENT IS FULL DEPTH HMA. A MINIMUM OF 2 INCHES OF HMA MATERIAL SHALL BE IN

2. REMOVE AND REPLACE WITH FULL DEPTH CLASS D PATCHES TO TOP OF MILLED SURFACE.

		DIMENSIONS ARE IN INCHES RWISE SHOWN.	(MILLIMETERS) UNLES	S
NG FOR	F.A.P. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VEMENT	607	128RS-5	WILL	39	30
		BD400–04 (BD–22)	CONTRACT	NO. 62	C83

DOAD DICT NO

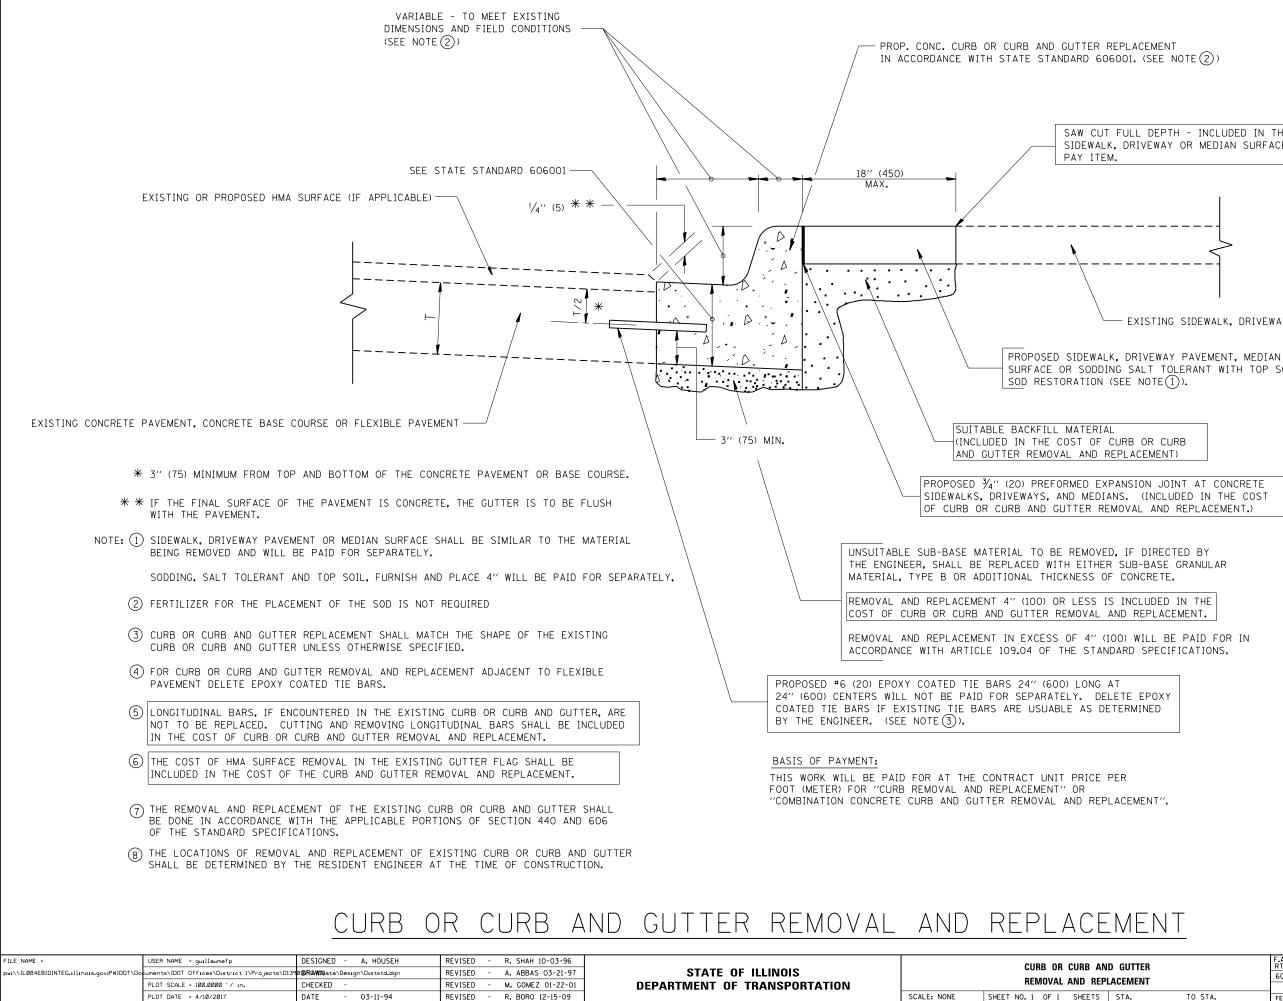


SAW CUT FULL DEPTH - INCLUDED IN THE COST OF SIDEWALK, DRIVEWAY OR MEDIAN SURFACE REMOVAL

EXISTING SIDEWALK, DRIVEWAY, MEDIAN SURFACE, SOD OR GROUND.

SURFACE OR SODDING SALT TOLERANT WITH TOP SOIL, 4" (100)


ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.


AND GUTTER		F.A.P. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
		607	128RS-5	WILL	39	31	
				BD600-06 (BD-24)	CONTRACT	NO. 62	C83
;	STA.	TO STA.	FED. R	DAD DIST. NO. 1 ILLINOIS FED. AI	D PROJECT		

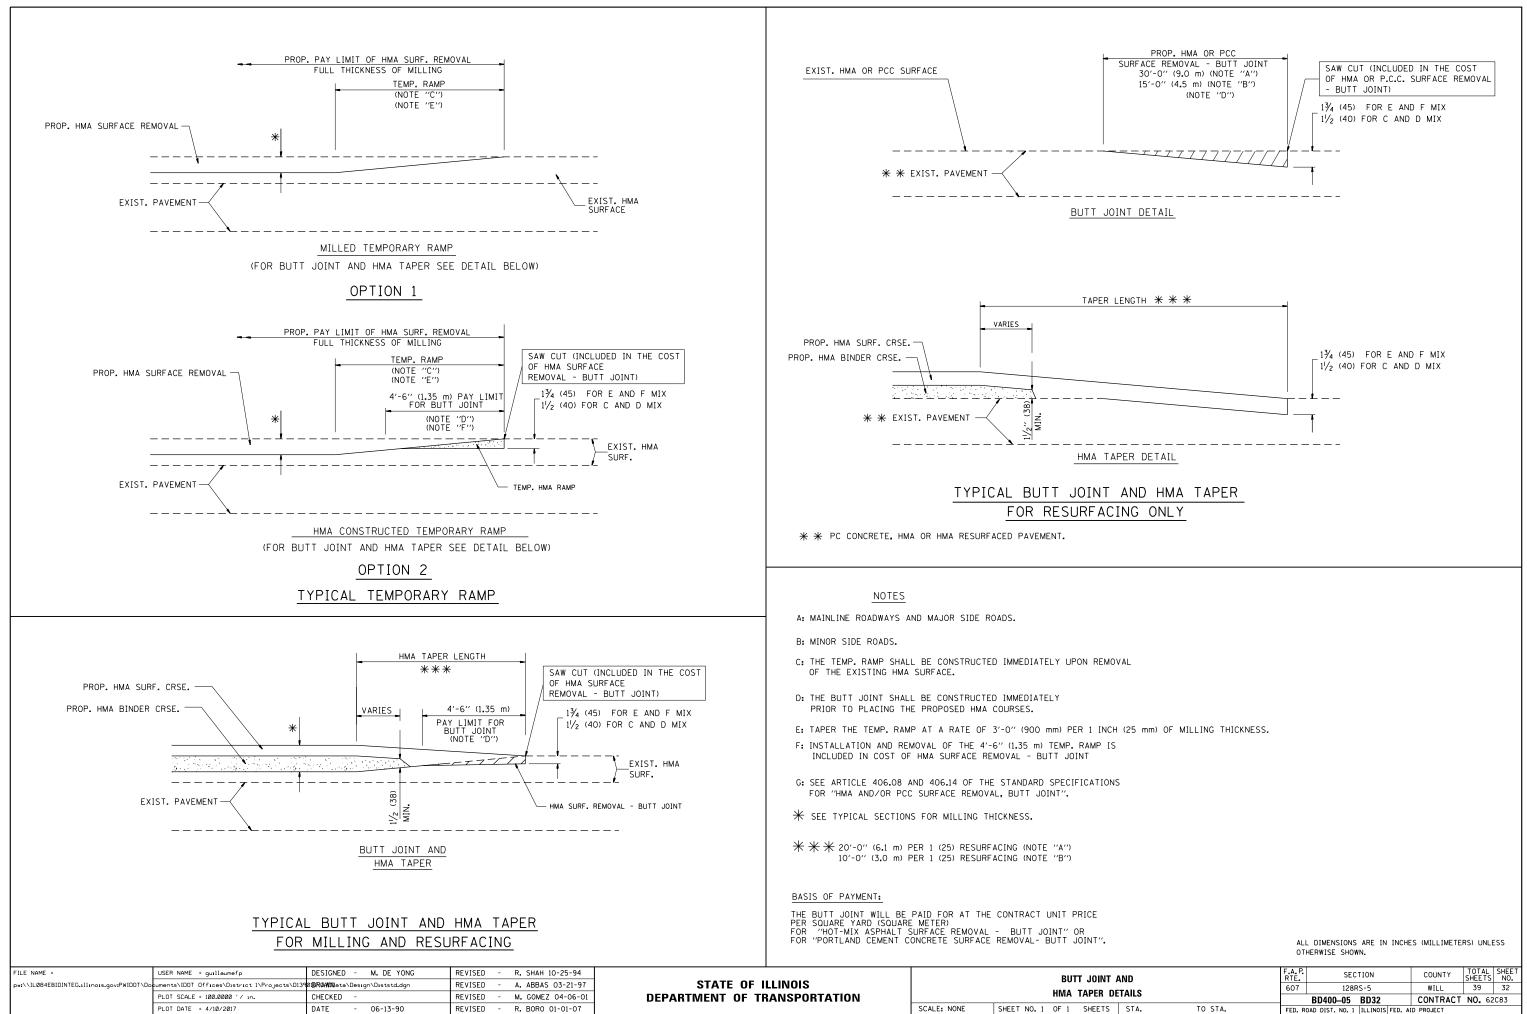


AND DETAILS		SEC	TION		COUNTY	TOTAL SHEETS	SHEET NO.
		128R	S-5		WILL	39	32
		BD400-05	BD32		CONTRACT	NO. 62	2C83
STA. TO STA.	FED. R	OAD DIST. NO. 1	ILLINOIS FEE	D. AID	PROJECT		


	to the second se	TYPE I OR TYPE II BARRICADES WITH ONE TYPE II BARRICADES WITH ONE FLASHING AMBER URITH TWO FLASH
	 SHOWN ON THE DRAWING AND a) ONE "ROAD CONSTRUCT MOUNTED ON IT APPROVING AND THE CLOSED PORTION BLOCKING WITH TYPE THE CROSS SECTION CO 2. SIDE ROAD WITH A SPEED L AS SHOWN ON THE DRAWING a) ONE "ROAD CONSTRUCT FLASHER MOUNTED ON OF THE MAIN ROUTE. b) THE CLOSED PORTION BLOCKING WITH TYPE OF THE CLOSED PORTION BLOCKING WITH TYPE OF THE CLOSED PORTI 3. CONES MAY BE SUBSTITUTED SPACING DURING DAY OPERA IN HEIGHT. 4. WHEN THE SIDE ROAD LIES I SIGNING AND THE WORK ZON 	 JMIT OF 40 MPH (60 km/h) OR LESS AS JAS DIRECTED BY THE ENGINEER: S. WHEN WORK IS BEING PERFORMED ON A SIDE ROAD OR DRIVEWAY. FOLLOW THE APPLICABLE STANDARD(S). THE DIRECTIONAL ARROW (M6-1 OR M6-4) SHALL BE COVERED OR REMOVED WHEN NO LONGER CONSISTENT WITH THE TRAFFIC CONTROL SET-UP. S. WHEN WORK IS BEING PERFORMED ON A SIDE ROAD OR DRIVEWAY. FOLLOW THE APPLICABLE STANDARD(S). THE DIRECTIONAL ARROW (M6-1 OR M6-4) SHALL BE COVERED OR REMOVED WHEN NO LONGER CONSISTENT WITH THE TRAFFIC CONTROL SET-UP. S. WHEN WORK IS BEING PERFORMED ON A SIDE ROAD OR DRIVEWAY. FOLLOW THE APPLICABLE STANDARD(S). THE DIRECTIONAL ARROW (M6-1 OR M6-4) SHALL BE COVERED OR REMOVED WHEN NO LONGER CONSISTENT WITH THE TRAFFIC CONTROL SET-UP. S. WHEN WORK IS BEING PERFORMED ON A SIDE ROAD OR DRIVEWAY. FOLLOW THE APPLICABLE STANDARD(S). THE DIRECTIONAL ARROW (M6-1) MADVANCE STANDARD(S) OR BY THE ENGINEER. TION AHEAD'' SIGN 48 × 48 (1.2 m × 1.2 m) WITH A IT APPROXIMATELY 500' (150 m) IN ADVANCE OF THE MAIN ROUTE SHALL BE PROTECTED BY III BARRICADES, 1/2 OF THE CROSS SECTION ION. D FOR BARRICADES OR DRUMS AT HALF THE ATIONS. CONES SHALL BE A MINIMUM OF 28 (710) BETWEEN THE BEGINNING OF THE MAINLINE WE, A SINGLE HEADED ARROW (M6-1). SHALL WOUBLE HEADED ARROW (M6-4).
FILE NAME = USER NAME = guilloumefp DESIGNED - L.H.A. REVISED - A. HOUSEH 10-15-96 pwt:\ll084EBDINTEG.illinois.gov/PWIDOT\Detamots\DOT Offices\District 1\Projects\D13%0@R040Nata\Design\Diststd.dgn REVISED - A. HOUSEH 10-15-96 Put PLOT SCALE = 100.0000 '/ in. CHECKED - REVISED - A. SCHUETZE 07-01-13 Default PLOT DATE = 4/10/2017 DATE - 06-89 REVISED - A. SCHUETZE 09-15-16	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	All dimensions are in inches (millimeters) unless otherwise shown. TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS F.A.P RTE. SECTION COUNTY TOTAL SHEETS NO. SCALE: NONE SHEET 1 OF 1 SHEETS STA. TO STA. ILLINOIS FED. AID PROJECT

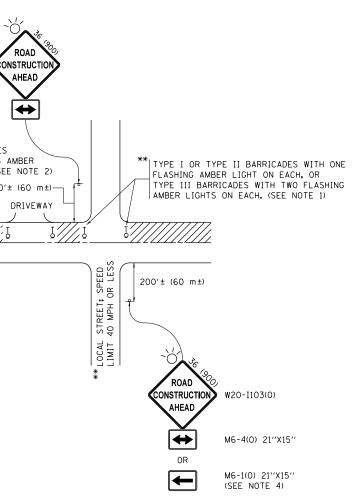

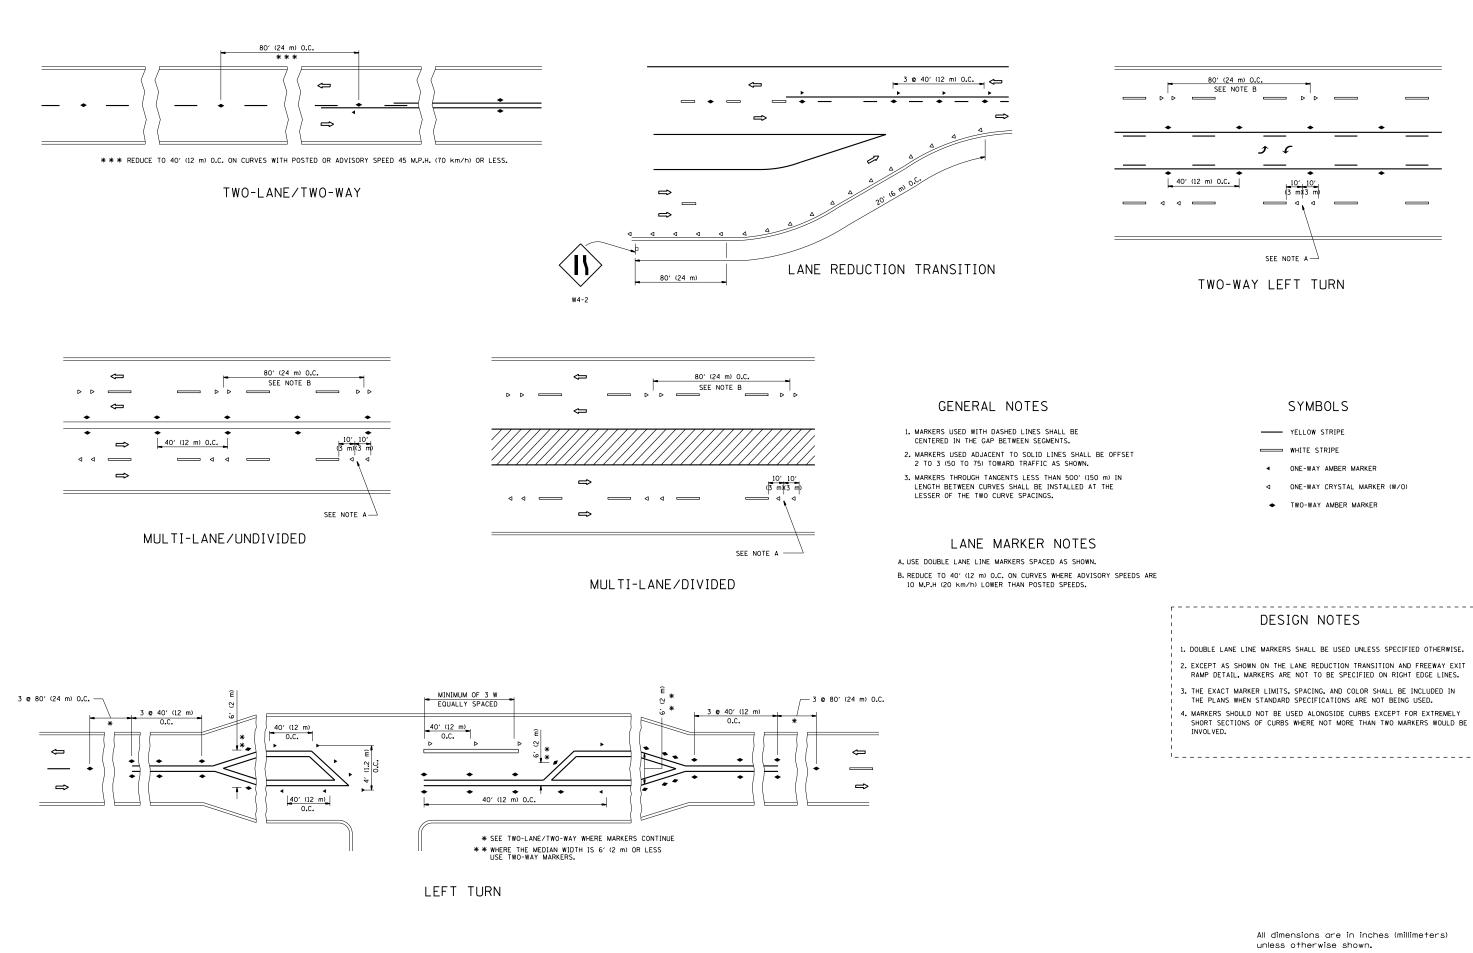

FILE	NAME =	USER NAME = guillaumefp	DESIGNED -	REVISED - T. RAMMACHER 09-19-94		TYPICAL APPLICATIONS RAISED REFLECTIVE PAVEMENT MARKERS (SNOW-PLOW RESISTANT)		F	A.P.	SECTION	COUNTY	TOTAL SHEET SHEETS NO.
pw:\\\	ILØ84EBIDINTEG.1111no15.gov:PWIDOT\Doc	uments\IDOT_Offices\District_I\Projects\D139	01 BR(ANUN) ata\Design\Diststd.dgn	REVISED -T. RAMMACHER 03-12-99	STATE OF ILLINOIS				607	128RS-5	WILL	39 34
		PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED -T. RAMMACHER 01-06-00	DEPARTMENT OF TRANSPORTATION			ANI)		TC-11	CONTRAC	T NO. 62C83
		PLOT DATE = 4/10/2017	DATE -	REVISED - C. JUCIUS 09-09-09		SCALE: NONE	SHEET NO. 1 OF 1 SHEETS STA. TO STA.		FED. ROAD DIS		S FED. AID PROJECT	

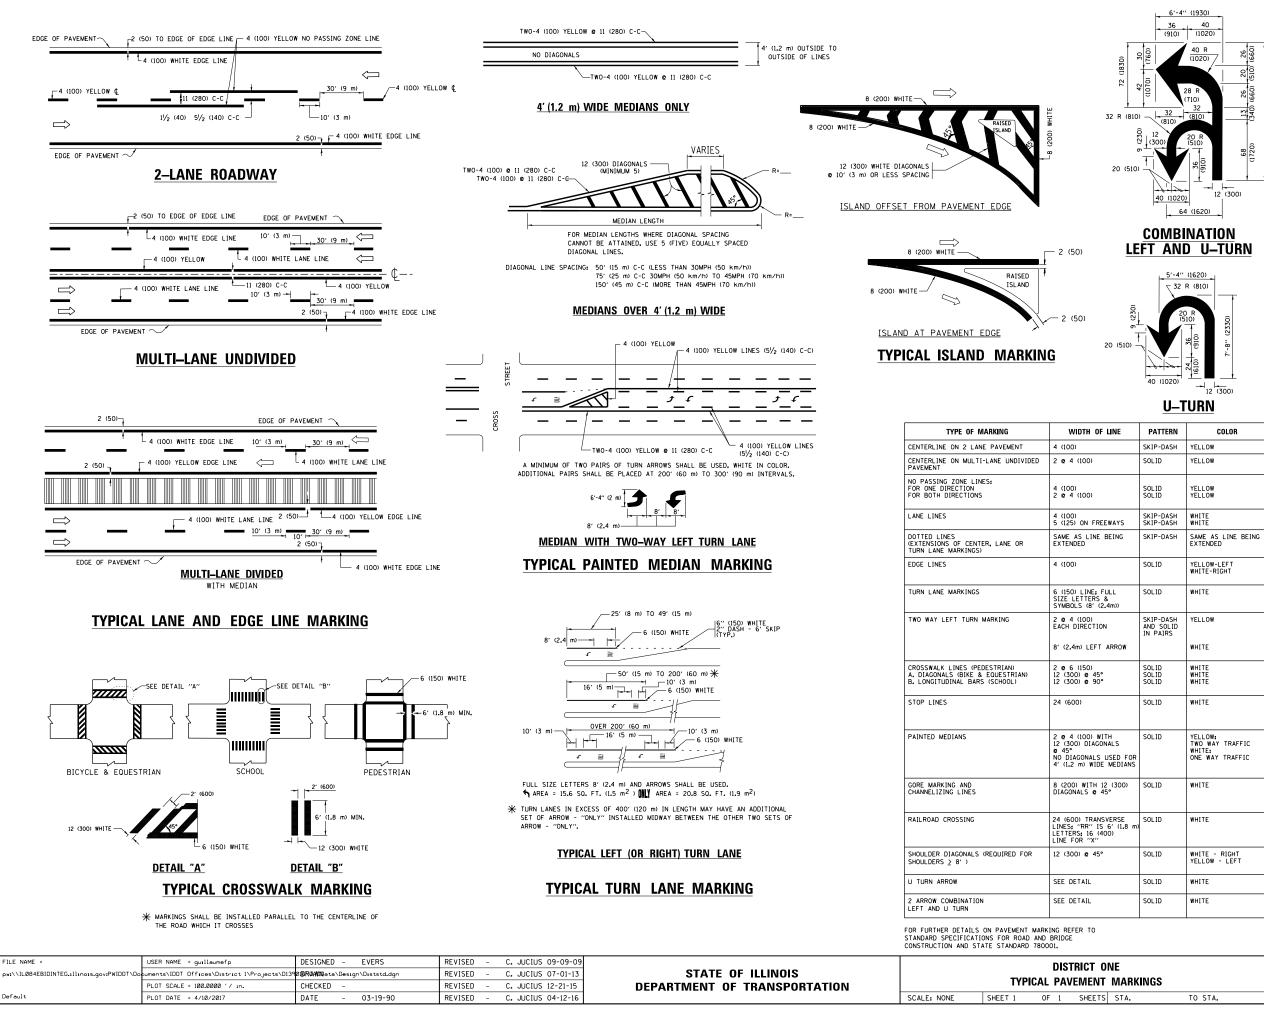

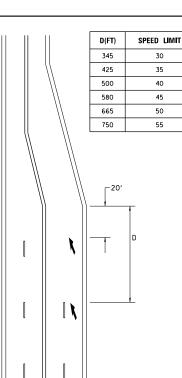

LANE REDUCTION TRANSITION

lane reduction arrows required at speeds of 45 MPH or greater or when specified in plans.

F LINE	PATTERN	COLOR	SPACING /REMARKS
	SKIP-DASH	YELLOW	10' (3 m) LINE WITH 30' (9 m) SPACE
	SOLID	YELLOW	11 (280) C-C
	SOLID SOLID	YELLOW YELLOW	5/2 (140) C-C FROM SKIP-DASH CENTERLINE 11 (280) C-C OMIT SKIP-DASH CENTERLINE BETWEEN
EEWAYS	SKIP-DASH SKIP-DASH	WHITE WHITE	10' (3 m) LINE WITH 30' (9 m) SPACE
BEING	SKIP-DASH	SAME AS LINE BEING EXTENDED	2' (600) LINE WITH 6' (1.8 m) SPACE
	SOLID	YELLOW-LEFT WHITE-RIGHT	OUTLINE MEDIANS IN YELLOW
FULL & 2.4m))	SOLID	WHITE	SEE TYPICAL TURN LANE MARKING DETAIL
ON ARROW	SKIP-DASH AND SOLID IN PAIRS	YELLOW	10' (3 m) LINE WITH 30' (9 m) SPACE FOR SKIP-DASH; 5½ (140) C-C BETWEEN SOLID LINE AND SKIP-DASH LINE SEE TYPICAL TWO-WAY LEFT TURN MARKING DETAIL
•	SOLID SOLID SOLID	WHITE WHITE WHITE	NOT LESS THAN 6' (1.8 m) APART 2' (600) APART 2' (600) APART SEE TYPICAL CROSSWALK MARKING DETAILS.
	SOLID	WHITE	PLACE 4' (1,2 m) IN ADVANCE OF AND PARALLEL TO CROSSWALK, IF PRESENT, OTHERWISE, PLACE AT DESIRED STOPPING POINT. PARALLEL TO CROSSROAD CENTERLINE, WHERE POSSIBLE
USED FOR E MEDIANS	SOLID	YELLOW: TWO WAY TRAFFIC WHITE: ONE WAY TRAFFIC	11 (280) C-C FOR THE DOUBLE LINE SEE TYPICAL PAINTED MEDIAN MARKING.
12 (300) 45°	SOLID	WHITE	DIAGONALS: 15' (4.5 m) C-C (LESS THAN 30MPH (50 km/h)) 20' (6 m) C-C 30MPH (50 km/h) TO 45MPH (70 km/h)) 30' (9 m) C-C (0VER 45MPH (70 km/h))
ISVERSE S 6' (1.8 m) 400)	SOLID	WHITE	SEE STATE STANDARD 780001 AREA OF: "R"=3.6 SO, FT. (0.33 m ²) EACH "X"=54.0 SO, FT. (5.0 m ²)
•	SOLID	WHITE - RIGHT YELLOW - LEFT	50' (15 m) C-C (LESS THAN 30MPH (50 km/h)) 75' (25 m) C-C (30 MPH (50 km/h) TO 45MPH (70 km/h)) 150' (45 m) C-C (0VER 45MPH (70 km/h))
	SOLID	WHITE	16.3 SF
	SOLID	WHITE	30.4 SF
		I	

All dimensions are in inches (millimeters) unless otherwise shown.

0	ONE			SECTION	COUNTY	TOTAL SHEETS	SHEET NO.		
т	T MARKINGS		607	128RS-5	WILL	39	35		
	I MARKINGS			TC-13	CONTRACT	NO. 62	2083		
٢S	STA.	TO STA.		ILLINOIS FED. AID PROJECT					



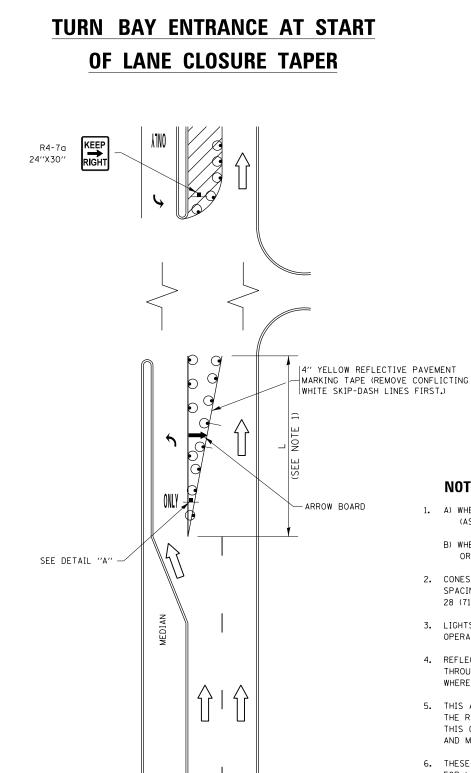


FIGURE 1

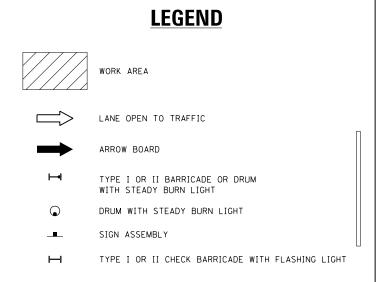


NOTES:

- 1. A) WHEN "L" IS < THE STORAGE LENGTH OF THE TURN LANE (AS SHOWN IN FIG. 1), USE FIGURE 1.
 - B) WHEN "L" IS > THE STORAGE LENGTH OF THE TURN LANE OR THE TURN LANE IS WITHIN THE LANE CLOSURE, USE FIGURE 2.
- 2. CONES MAY BE SUBSTITUTED FOR BARRICADES OR DRUMS AT HALF THE SPACING DURING DAY OPERATIONS. CONES SHALL BE A MINIMUM OF 28 (710) IN HEIGHT.
- 3. LIGHTS WILL NOT BE REQUIRED ON BARRICADES OR DRUMS FOR DAY OPERATIONS. ALL LIGHTS SHALL BE MONODIRECTIONAL.
- 4. REFLECTIVE TEMPORARY PAVEMENT MARKINGS SHALL BE PLACED THROUGHOUT THE BARRICADED AREAS OF EACH TURN BAY AS SHOWN WHERE THE CLOSURE TIME IS GREATER THAN FOURTEEN (14) DAYS.
- 5. THIS APPLICATION ALSO APPLIES WHEN WORK IS BEING PERFORMED IN THE RIGHT LANE(S) AND THE RIGHT TURN BAY IS TO REMAIN OPEN. UNDER THIS CONDITION, "RIGHT TURN LANE" R3-1100R 24 x 24 (600 x 600) AND M6-2R 21 × 15 (530 × 380) SHALL BE USED.
- 6. THESE CONTROLS SHALL SUPPLEMENT MAINLINE TRAFFIC CONTROL FOR LANE CLOSURES.
- 7. THE SIGNS SHALL BE MOUNTED ABOVE THE BARRICADES/DRUMS ON SEPARATE SIGN SUPPORTS THAT MEET NCHRP 350 OR MASH PREQUIREMENTS.
- 8. TRAFFIC CONTROL AND PROTECTION AT TURN BAYS (TO REMAIN OPEN TO TRAFFIC) SHALL BE INCLUDED IN THE COST OF SPECIFIED TRAFFIC CONTROL STANDARDS OR ITEMS.

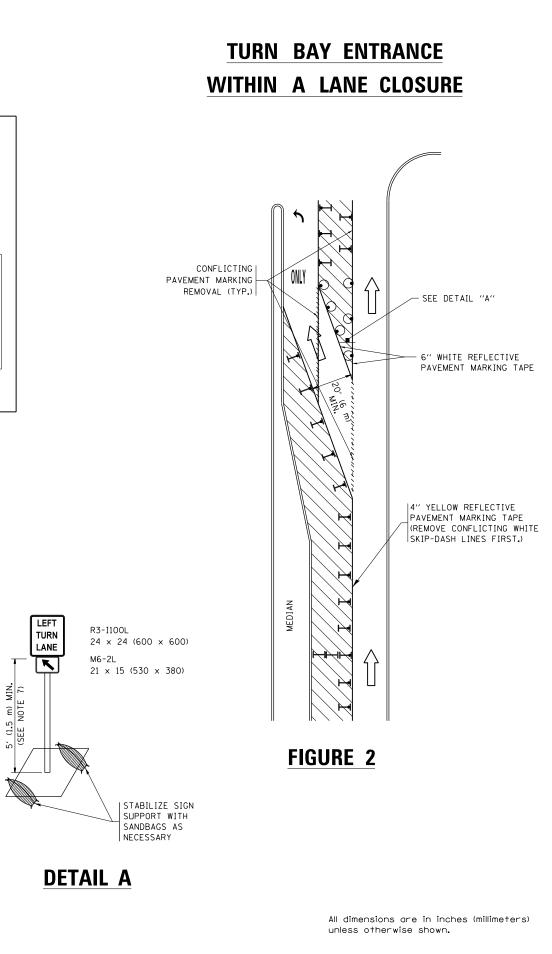


FILE NAME =	USER NAME = guillaumefp	REVISED - T. RAMMACHER 09-08-94 REVISED - R. BORO 09-14-09		TRAFFIC CONTROL AND PROTECTION AT TURN BAYS (TO REMAIN OPEN TO TRAFFIC) SCALE: NONE SHEET 1 OF 1 SHEETS STA. TO STA.		SECTION	COUNTY	TOTAL SHEET
pw:\\ILØ84EBIDINTEG.1llinois.gov:PWIDOT\Do	cuments\IDOT_Offices\District_1\Projects\D13°	ЮЖВЕФ4\$0E93a\Design\ФизН0Н\$96Н 11-07-95 REVISED – А. SCHUETZE 07-01-1	STATE OF ILLINOIS			128RS-5	WILL	39 36
	PLOT SCALE = 100.0000 ' / in.	REVISED - A. HOUSEH 10-12-96 REVISED - A. SCHUETZE 09-15-16	DEPARTMENT OF TRANSPORTATION			TC-14	CONTRAC	T NO. 62C83
Default	PLOT DATE = 4/10/2017	REVISED - T. RAMMACHER 01-06-00 REVISED -					D. AID PROJECT	

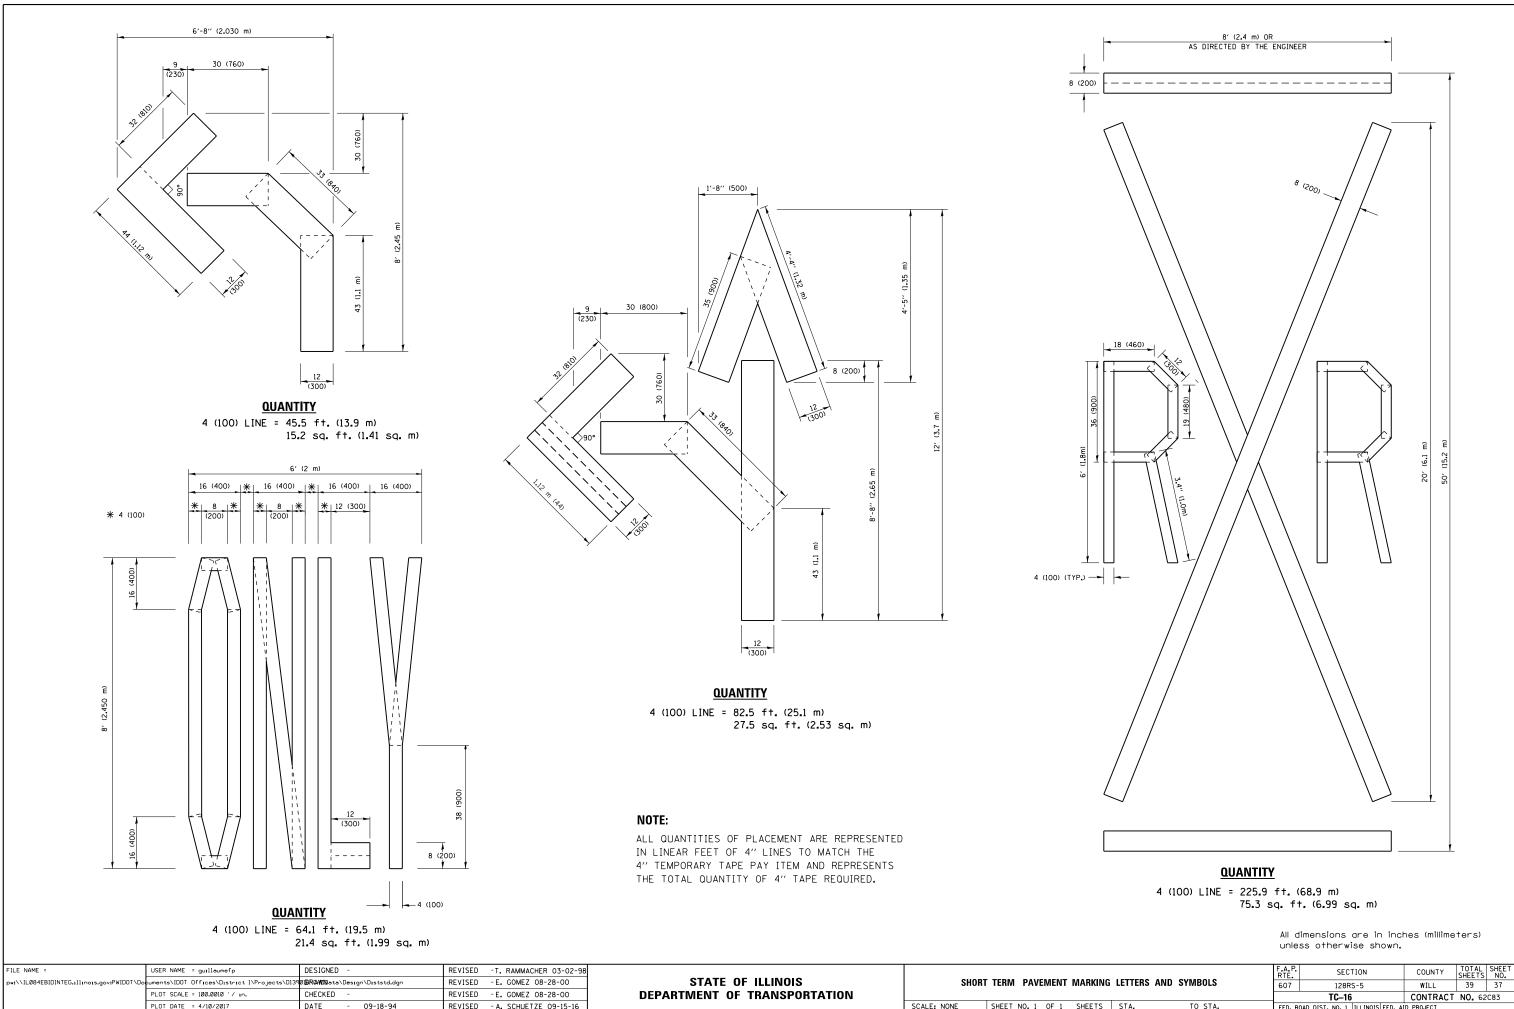

SCALE: NONE SHEET NO. 1 OF 1 SHEETS

	C LETTERS AND SVMDOLS		F.A.P. RTE	SECTION		COUNTY	TOTAL SHEETS	SHEET NO.
IG			607	128RS-5		WILL	39	37
			TC-16		CONTRACT	NO. 62	C83	
	STA.	TO STA.	FED. R	DAD DIST. NO. 1 ILLINOI	5 FED. A	ID PROJECT		

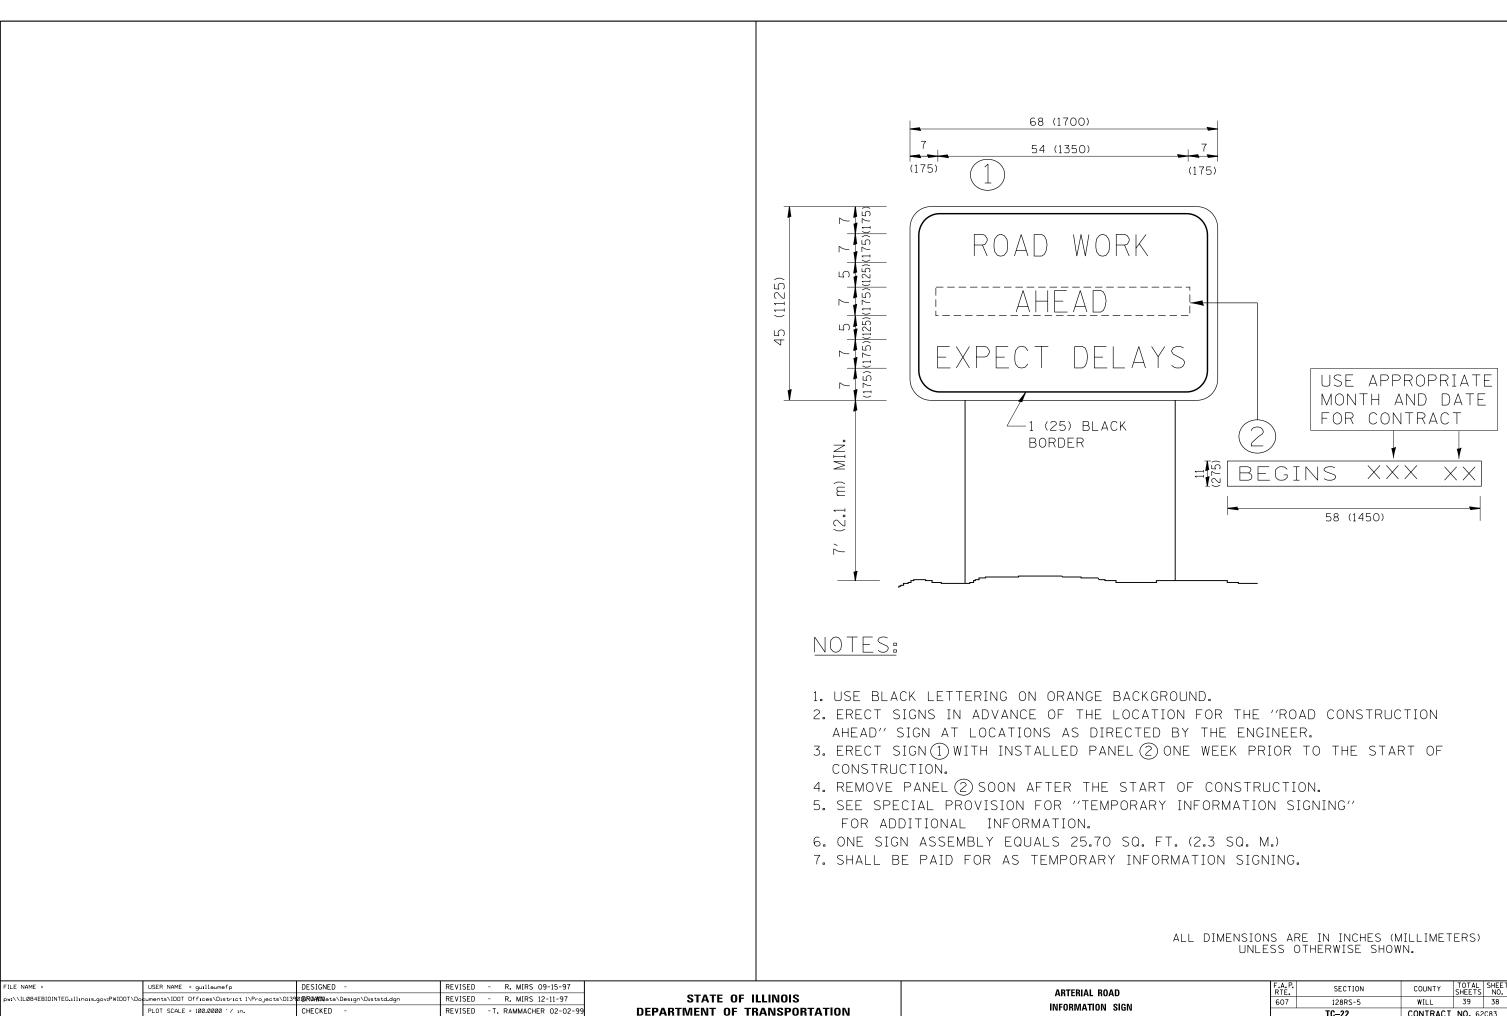


REVISED - C. JUCIUS 01-31-07

PLOT DATE = 4/10/2017

DATE

SCALE: NONE SHEET NO. 1 OF 1 SHEETS

ROAD			F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
м	N SIGN			128RS-5	WILL	39	38
NIN				TC-22 CONTRACT NO.			62C83
	STA.	TO STA.	FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				

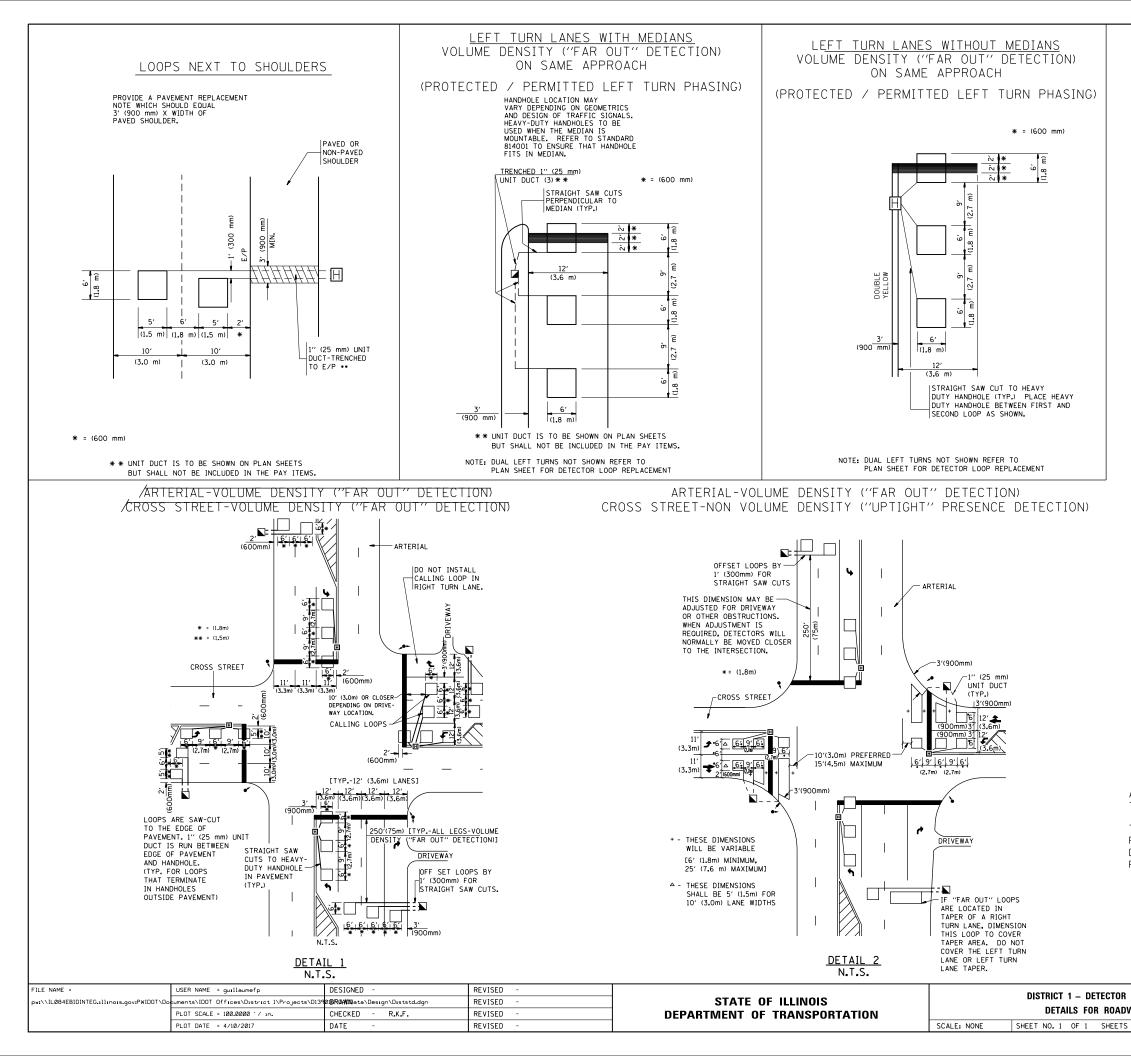

NOTES:

VEHICLES LOOP DETECTORS

- * ALL LEAD IN CABLE SHALL BE TWO CONDUCTOR NO. 14 TWISTED, SHIELDED.
- * EACH DETECTOR LOOP SHALL HAVE ITS OWN SAW CUT FROM THE LOOP TO THE EDGE OF PAVEMENT OR TO A HANDHOLE IN THE PAVEMENT.
- * EACH DETECTOR LOOP SHALL HAVE ITS OWN ONE INCH (25 mm) UNIT DUCT BETWEEN THE EDGE OF PAVEMENT AND THE FIRST HANDHOLE OR JUNCTION BOX. EACH UNIT DUCT RUN SHALL BE SHOWN ON THE PLANS BY THE DESIGNER, BUT SHALL NOT BE PAID FOR SEPARATLY. THIS ITEM IS INCIDENTAL TO THE PAY ITEM FOR DETECTOR LOOPS.
- * ONE DIMENSION OF <u>ALL</u> DETECTOR LOOPS SHALL BE SIX FEET (1.8 m)
- * EACH LANE OF NON-LOCKING, PRESENCE DETECTION AND EACH LANE OF A DOUBLE LEFT TURN LANE REQUIRES A SEPARATE INDUCTIVE LOOP DETECTOR AND LEAD IN CABLE.
- * WHEN NON-LOCKING, PRESENCE DETECTION IS USED, <u>MORE</u> THAN ONE LOOP PER LANE IS REQUIRED BEHIND THE STOP BAR (i.e. 1-1/2, 1-3/4, 2).
- * WHEN SYSTEM LOOPS ARE REQUIRED ON AN APPROACH OF AN INTERSECTION, THE LOOPS USED FOR VOLUME DENSITY AND INTERSECTION TIMING SHALL ALSO BE USED AS SYSTEM DETECTORS. <u>EACH</u> ONE OF THESE TYPE OF LOOPS REQUIRES A <u>SEPARATE</u> TWO CONDUCTOR NO. 14 TWISTED SHIELDED CABLE AND A <u>SEPARATE</u> INDUCTIVE LOOP DETECTOR WHEN NEW CONTROLLERS ARE UTILIZED. THE DESIGNER SHALL LABEL THESE TYPES OF LOOPS AS "INTERSECTION AND SAMPLING (SYSTEM) DETECTORS" ON THE SIGNAL LAYOUT, THE INTERCONNECT PLAN AND THE SYSTEM CABLE PLAN. WHEN AN EXISTING CONTROLLER IS UTILIZED FOR THIS TYPE OF DETECTION, THE PAY ITEM "INDUCTIVE LOOP DETECTOR WITH SYSTEM OUTPUT" SHOULD BE USED.

PLACEMENT OF DETECTORS

THE FOLLOWING FIGURES REPRESENT THE MOST COMMON DETECTOR LOOP LOCATIONS AND SIZES. ADJUSTMENTS WILL BE NECESSARY FOR SPECIFIC GEOMETRIC CONSIDERATIONS.

LOCATIONS AND DEMENSIONS OF DETECTOR LOOPS ARE REQUIRED ON \underline{ALL} SIGNAL LAYOUT PLAN SHEETS.

"FAR OUT" DETECTION REFERS TO LOCKING, PRESENCE TYPE DETECTION LOCATED IN THRU LANES, RIGHT TURN LANES, AND RIGHT TURN LANE TAPER AREAS (IF APPLICABLE), USUALLY 250' (75 m) IN ADVANCE OF STOP BARS. "UPTIGHT" DETECTION REFERS TO NON-LOCKING PRESENCE TYPE DETECTION LOCATED IN ALL LANES AND 10'-15' (3.0 m-4.5 m) BEHIND THE CROSSING STREET'S EDGE OF PAVEMENT EXTENDED.

NOTE:

ALL DETAILS AND NOTES SHOWN ARE FROM THE I.D.O.T. DISTRICT 1 TRAFFIC SIGNAL DESIGN GUIDELINES DATED JANUARY 1995

THIS DRAWING HAS BEEN PREPARED TO ASSIST THE RESIDENT ENGINEER FOR ALL ROADWAY RESURFACING OR S.M.A.R.T. PROJECTS WHERE THE DIMENSIONS ARE NOT SHOWN ON THE PLANS AND THE FINAL LOCATIONS FOR CROSSWALKS OR STOP BARS ARE NOT DETERMINED.

Ŀ	LOOP INSTALLATION			SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
WAY RESURFACING		607	128RS-5	WILL	39	39	
WAT RESURFACING				TS-07	CONTRACT	NO. 62	C83
	STA.	TO STA.	FED. RC	DAD DIST. NO. 1 ILLINOIS FED. A	ID PROJECT		