


STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY	SHEET NO.	SHEET NO.
FAP 301	177-2	STEPHENSON	386	149
FED. ROAD DIST. NO. 7		ILLINOIS FED. AID PROJECT-		

Contract No. 64799



**NORTH CURB LINE**

Location	Station	Offset	Theoretical Grade Elevations
W. End of West Appr. Slab	536+39.36	-34.42	774.25
A	536+49.36	-34.42	774.38
B	536+59.57	-34.00	774.51
E. End of West Appr. Slab	536+69.57	-34.00	774.64

**NORTH EDGE OF PAVEMENT**

Location	Station	Offset	Theoretical Grade Elevations
W. End of West Appr. Slab	536+44.78	-24.00	774.54
A	536+54.78	-24.00	774.66
B	536+64.78	-24.00	774.79
E. End of West Appr. Slab	536+74.78	-24.00	774.91

**☉ ROADWAY (WB)**


Location	Station	Offset	Theoretical Grade Elevations
W. End of West Appr. Slab	536+51.03	-12.00	774.80
A	536+61.03	-12.00	774.93
B	536+71.03	-12.00	775.05
E. End of West Appr. Slab	536+81.03	-12.00	775.18

**SOUTH EDGE OF PAVEMENT & P.G. (WB)**

Location	Station	Offset	Theoretical Grade Elevations
W. End of West Appr. Slab	536+57.27	0.00	774.69
A	536+67.27	0.00	774.82
B	536+77.27	0.00	774.94
E. End of West Appr. Slab	536+87.27	0.00	775.07

**SOUTH CURB LINE**

Location	Station	Offset	Theoretical Grade Elevations
W. End of West Appr. Slab	536+60.64	6.42	774.60
A	536+70.64	6.42	774.73
B	536+80.42	6.00	774.86
E. End of West Appr. Slab	536+90.42	6.00	774.98

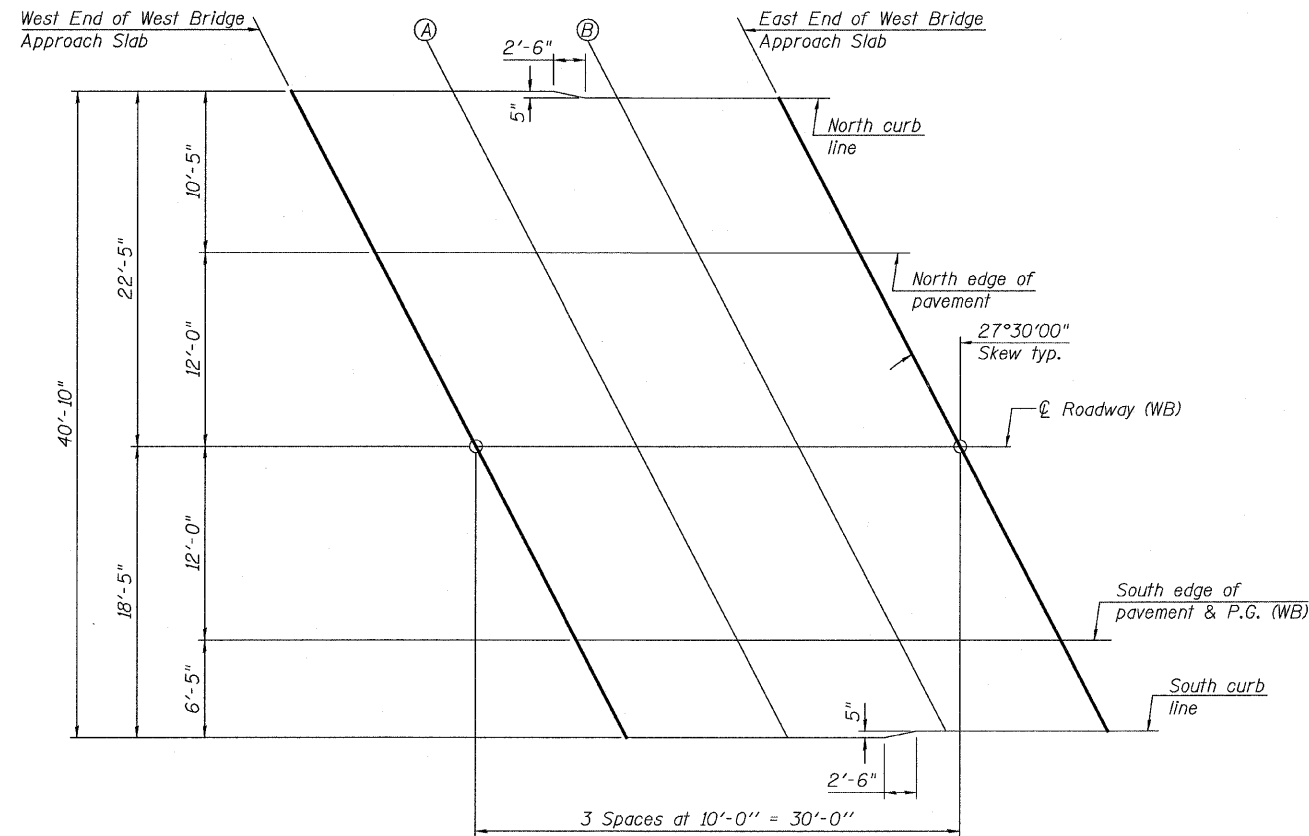

**PLAN**

(West Bridge Approach Slab)

DESIGNED	H.ALKHAIB
CHECKED	S.CHELBIAN
DRAWN	H.ALKHAIB
CHECKED	J.GRAINAWI

**TOP OF WEST APPROACH  
SLAB ELEVATIONS  
F.A.P. ROUTE 301 SECTION 177-2B-1  
STEPHENSON COUNTY  
STATION 540+65.71  
STRUCTURE NO. 089-0082**



FOR INFORMATION ONLY