

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	SHEET NO. 10
FAP 301	177-2	STEPHENSON	386	150	47 SHEETS
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT-			

Contract No. 64799



NORTH CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
W. End of East Appr. Slab	544+26.45	-34.00	774.77
A	544+36.45	-34.00	774.64
B	544+46.23	-34.42	774.49
E. End of East Appr. Slab	544+56.23	-34.42	774.35

NORTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
W. End of East Appr. Slab	544+31.65	-24.00	774.91
A	544+41.65	-24.00	774.77
B	544+51.65	-24.00	774.63
E. End of East Appr. Slab	544+61.65	-24.00	774.49

☉ ROADWAY (WB)


Location	Station	Offset	Theoretical Grade Elevations
W. End of East Appr. Slab	544+37.90	-12.00	775.01
A	544+47.90	-12.00	774.88
B	544+57.90	-12.00	774.73
E. End of East Appr. Slab	544+67.90	-12.00	774.59

SOUTH EDGE OF PAVEMENT & P.G. (WB)

Location	Station	Offset	Theoretical Grade Elevations
W. End of East Appr. Slab	544+44.15	0.00	774.74
A	544+54.15	0.00	774.60
B	544+64.15	0.00	774.46
E. End of East Appr. Slab	544+74.15	0.00	774.31

SOUTH CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
W. End of East Appr. Slab	544+47.27	6.00	774.57
A	544+57.27	6.00	774.43
B	544+67.49	6.42	774.27
E. End of East Appr. Slab	544+77.49	6.42	774.12

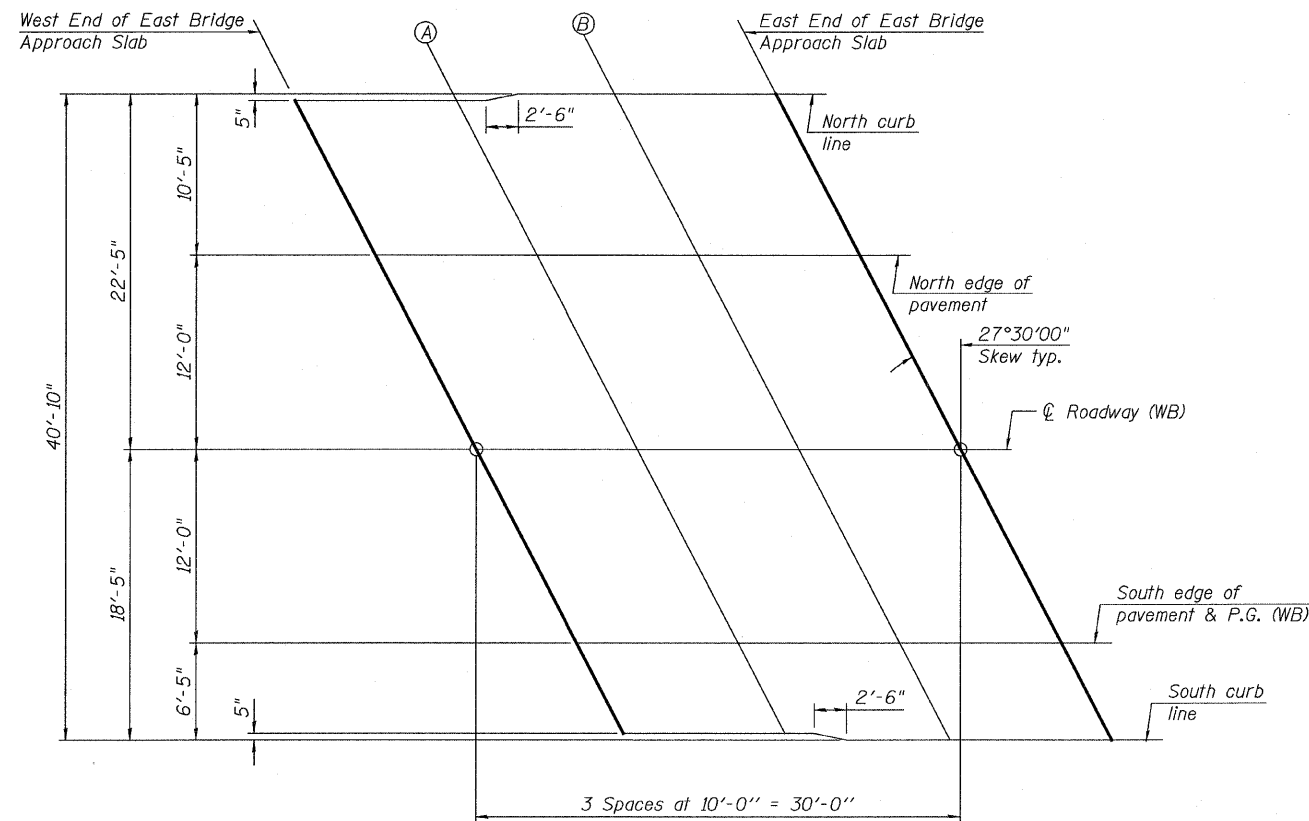

PLAN

(East Bridge Approach Slab)

DESIGNED	H.ALKHATIB
CHECKED	S.CHELBIAN
DRAWN	H.ALKHATIB
CHECKED	J.GRAINAWI

**TOP OF EAST APPROACH
SLAB ELEVATIONS**
F.A.P. ROUTE 301 SECTION 177-2B-1
STEPHENSON COUNTY
STATION 540+65.71
STRUCTURE NO. 089-0082



FOR INFORMATION ONLY