

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	SHEET NO. 5
FAP 301	177-2	STEPHENSON	386	192	24 SHEETS
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT			

Contract No. 64799

NORTH CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
W. End of West Appr. Slab	568+81.62	-34.42	791.02
A	568+91.62	-34.42	791.19
B	569+01.62	-34.42	791.36
E. End of West Appr. Slab	569+11.62	-34.42	791.53

NORTH EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
W. End of West Appr. Slab	568+83.33	-24.00	791.27
A	568+93.33	-24.00	791.44
B	569+03.33	-24.00	791.60
E. End of West Appr. Slab	569+13.33	-24.00	791.77

☉ ROADWAY (WB)



Location	Station	Offset	Theoretical Grade Elevations
W. End of West Appr. Slab	568+85.30	-12.00	791.49
A	568+95.30	-12.00	791.66
B	569+05.30	-12.00	791.82
E. End of West Appr. Slab	569+15.30	-12.00	791.99

SOUTH EDGE OF PAVEMENT & P.G. (WB)

Location	Station	Offset	Theoretical Grade Elevations
W. End of West Appr. Slab	568+87.27	0.00	791.33
A	568+97.27	0.00	791.50
B	569+07.27	0.00	791.67
E. End of West Appr. Slab	569+17.27	0.00	791.84

SOUTH CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
W. End of West Appr. Slab	568+88.32	6.42	791.22
A	568+98.32	6.42	791.39
B	569+08.32	6.42	791.55
E. End of West Appr. Slab	569+18.32	6.42	791.72

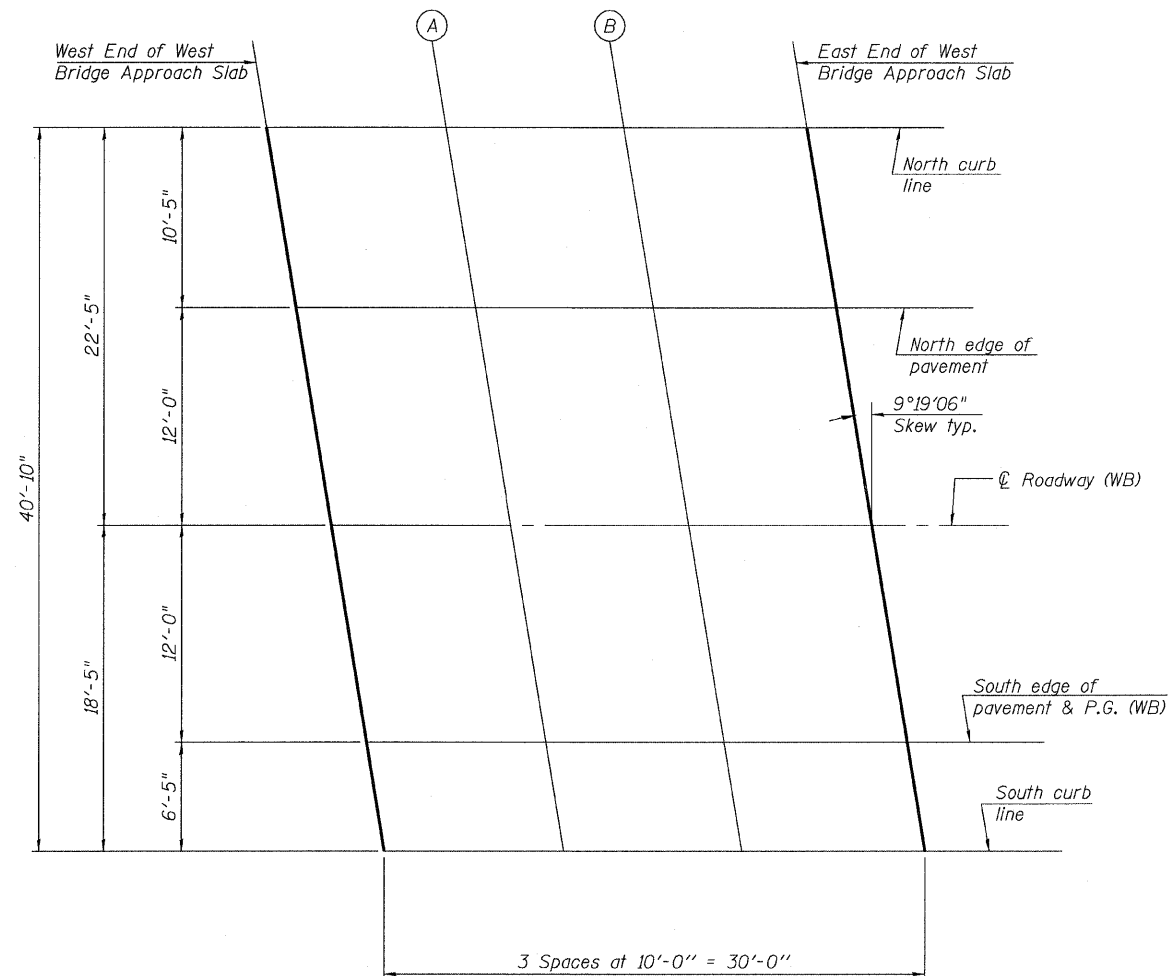

PLAN

(West Bridge Approach Slab)

DESIGNED	H.ALKhatIB
CHECKED	S.CHELBIAN
DRAWN	D.C.PATEL
CHECKED	J.GRAINAWI

TOP OF WEST APPROACH  
SLAB ELEVATIONS  
F.A.P. ROUTE 301 SECTION 177-2VB-1  
STEPHENSON COUNTY  
STATION 569+87.29  
STRUCTURE NO. 089-0083



FOR INFORMATION ONLY