




PROPOSED TYPICAL SECTION
RANDALL ROAD
STA. 26+65 TO STA. 33+28

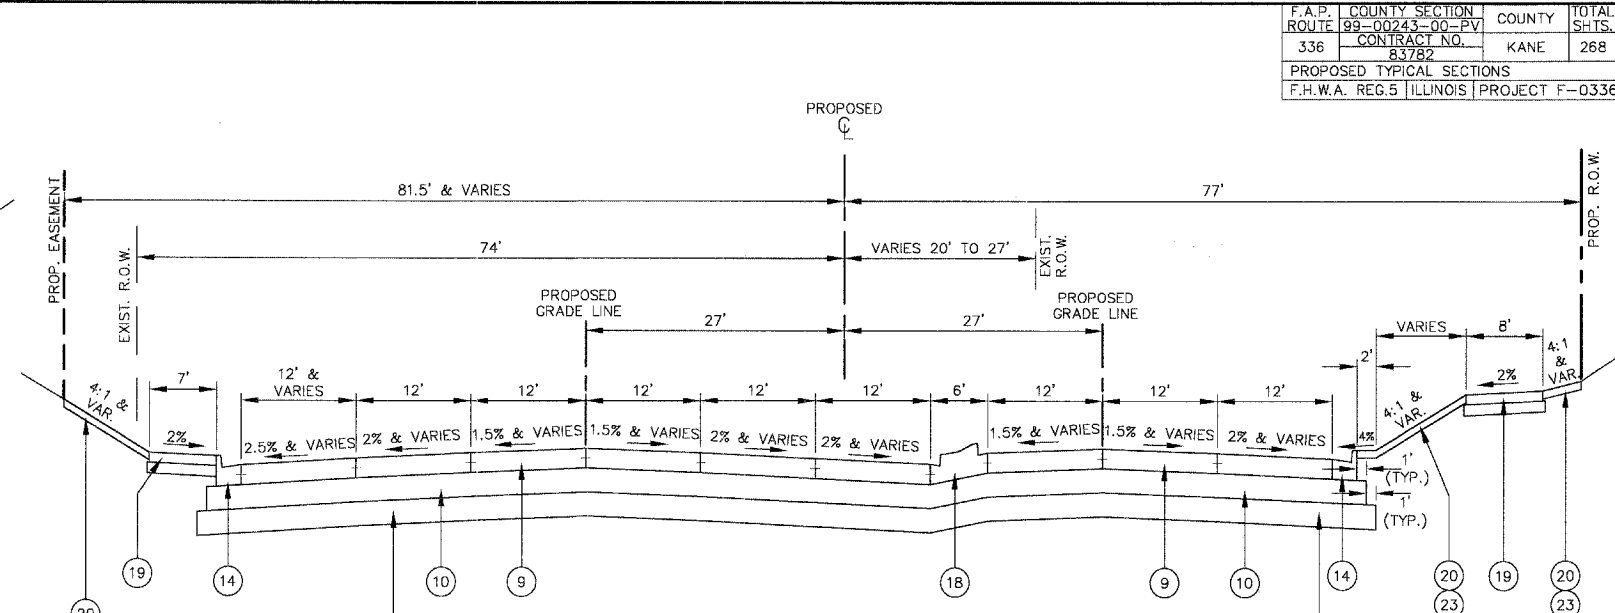


PROPOSED TYPICAL SECTION
RANDALL ROAD
STA. 40+33 TO STA. 43+29

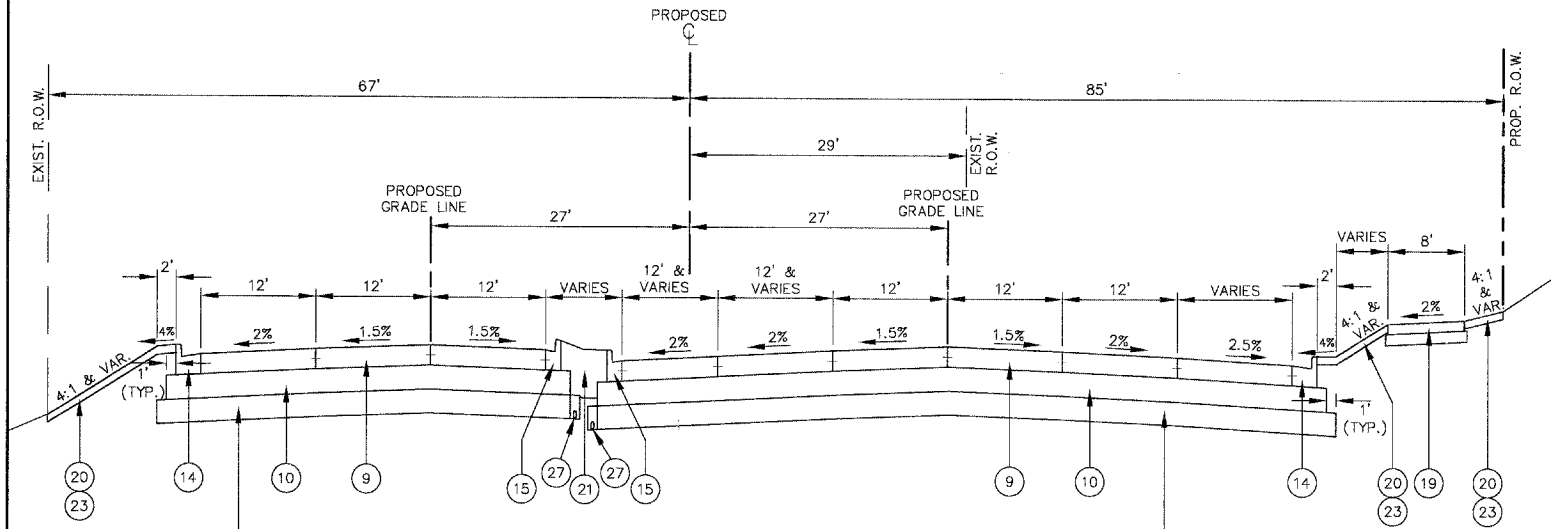

PROPOSED TYPICAL SECTION
RANDALL ROAD
STA. 33+28 TO STA. 35+93

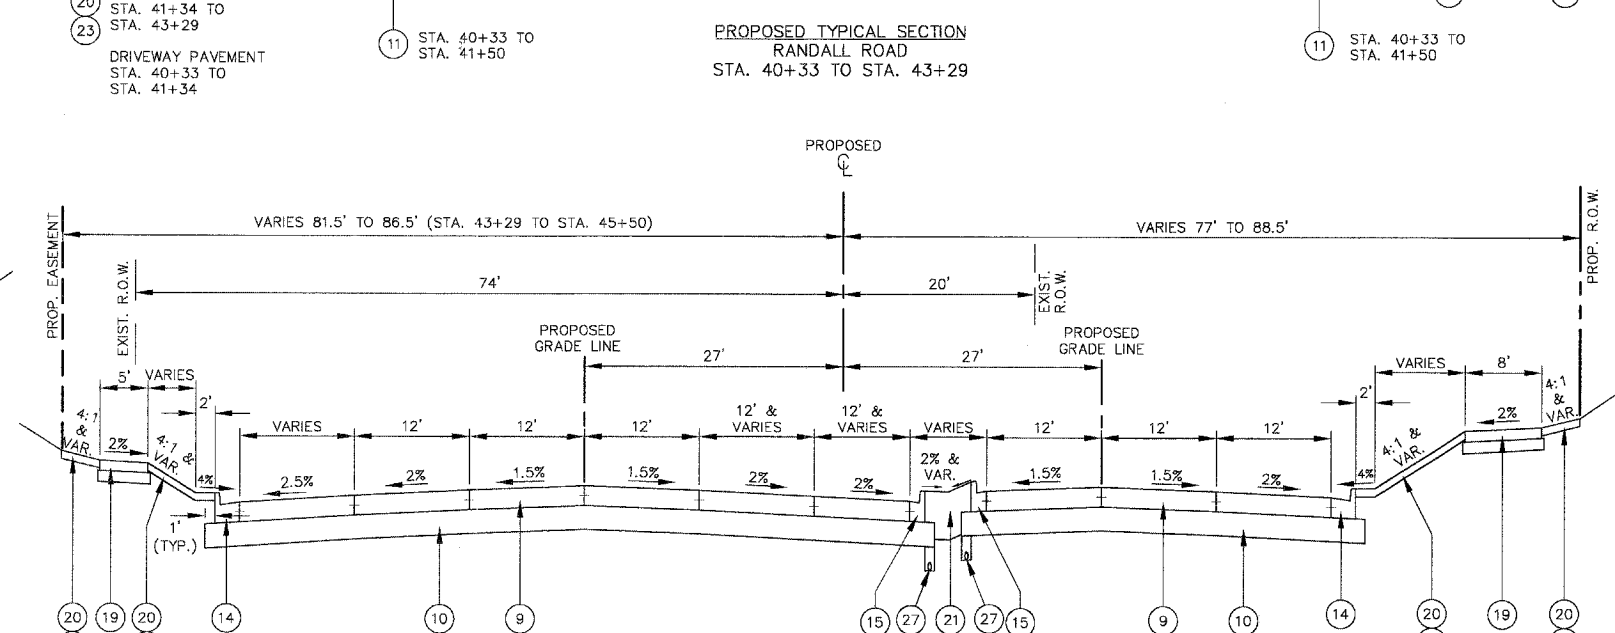

PROPOSED TYPICAL SECTION
RANDALL ROAD
STA. 43+29 TO STA. 45+50

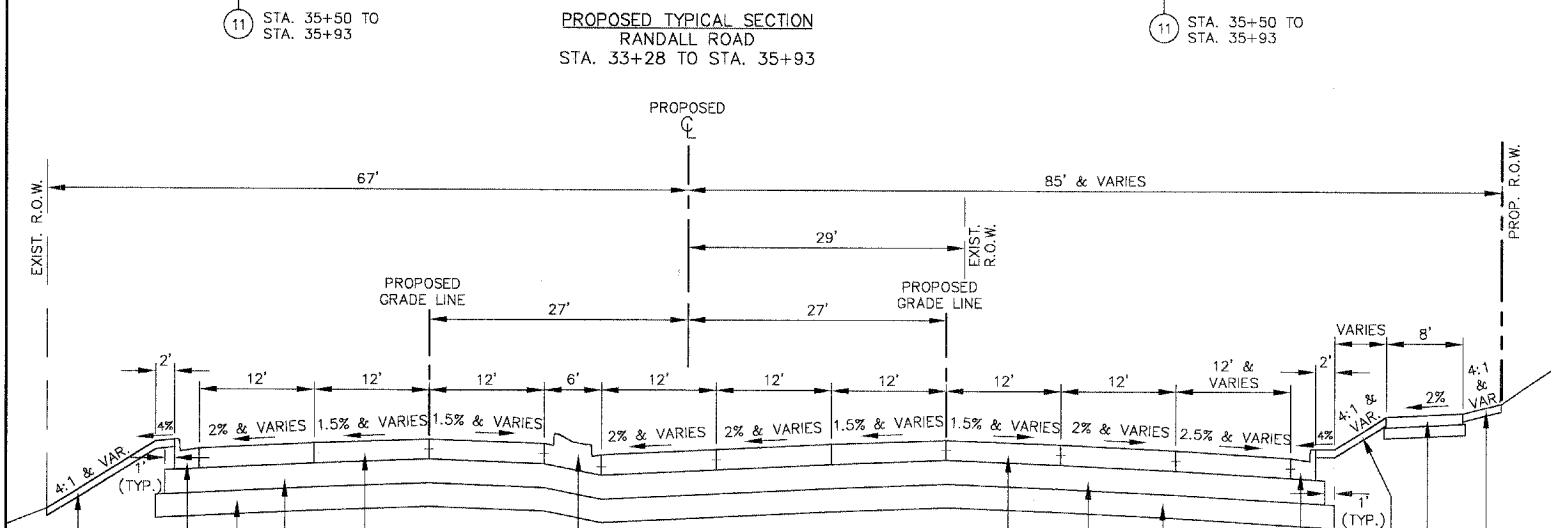

PROPOSED TYPICAL SECTION
RANDALL ROAD
STA. 35+93 TO STA. 38+40

PROPOSED TYPICAL SECTION
RANDALL ROAD / IL. RTE. 64 INTERSECTION
STA. 38+40 TO STA. 40+33

PROPOSED TYPICAL SECTION ITEMS

- | | | |
|--|--|--|
| 1 POLYMERIZED BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "F", N90, 2" | 10 AGGREGATE SUBGRADE, 12" | 20 TOPSOIL FURNISH AND PLACE, 4" |
| 2 BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "D", N50, 2" | 11 POROUS GRANULAR EMBANKMENT, SPECIAL 12" WITH GEOTECHNICAL FABRIC FOR GROUND STABILIZATION | 21 TOPSOIL FURNISH AND PLACE, 24" (LANDSCAPED MEDIAN, SEE LANDSCAPING PLANS FOR GRADING) |
| 3 BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, IL-19, N90, 2 1/4" | 12 HIGH-EARLY-STRENGTH PORTLAND CEMENT CONCRETE PAVEMENT, 10" (JOINTED) | 22 SEEDING CLASS 2A |
| 4 BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, IL-19, N50, 2 1/4" | 13 AREA REFLECTIVE CRACK CONTROL TREATMENT, SYSTEM A | 23 SODDING, SALT TOLERANT |
| 5 BITUMINOUS BASE COURSE, SUPERPAVE, 9 3/4" | 14 COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24 | 24 STEEL PLATE BEAM GUARD RAIL, TYPE A GUARDRAIL STABILIZATION BITUMINOUS SHOULDERS SUPERPAVE 6" |
| 6 BITUMINOUS BASE COURSE, SUPERPAVE, 8 3/4" | 15 COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12 | 25 BITUMINOUS SURFACE REMOVAL |
| 7 BITUMINOUS BASE COURSE, SUPERPAVE, 5 3/4" | 16 COMBINATION CONCRETE CURB AND GUTTER, TYPE M-2.12 | 26 STABILIZED BIKE PATH BITUMINOUS CONCRETE SURFACE COURSE SUPERPAVE, MIX "C", N50, 3"; AGGREGATE BASE COURSE, TYPE B, 6"; AGGREGATE SHOULDERS, TYPE B, 6" |
| 8 LEVELING BINDER (MACHINE METHOD), SUPERPAVE, N70 | 17 PORTLAND CEMENT CONCRETE CORRUGATED MEDIAN | 27 PIPE UNDERDRAIN, 4" |
| 9 PORTLAND CEMENT CONCRETE PAVEMENT, 10" (JOINTED) JOINTS @ 15' C/C. SEE STANDARDS FOR TIE BARS AND DOWEL BARS | 18 CONCRETE MEDIAN, TYPE SB-6.12 | |
| 12 HIGH-EARLY-STRENGTH PCC PAVEMENT, 10" (JOINTED) SEE SHEET NO. 109 FOR PAVEMENT JOINTS AND ELEVATIONS. | 19 PORTLAND CEMENT CONCRETE SIDEWALK, 5" WITH AGGREGATE BASE COURSE, TYPE B, 4" | |
| 10 AGGREGATE SUBGRADE, 12" | | |
| 11 POROUS GRANULAR EMBANKMENT, SPECIAL 12" WITH GEOTECHNICAL FABRIC FOR GROUND STABILIZATION | | |