
# STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

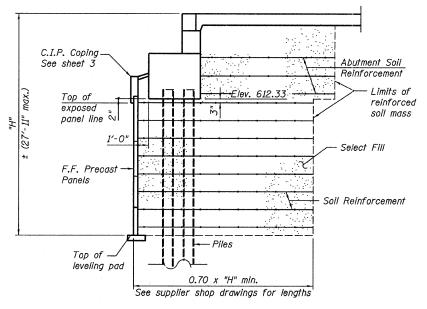


## SECTION THRU ABUTMENT

## <u>NOTES</u>

The MSE wall supplier shall design the abutment soil reinforcement to resist a horizontal force of 1.83 kips/ft of abutment.

Piles shall be driven prior to placement of the reinforced select fill and coated with coal tar epoxy from the bottom of the select fill to 1" above the base of abutment. The cost of the coal tar epoxy shall be included with the cost of furnishing piles. Cost of furnishing and driving piles is included with S.N. 016-0724.

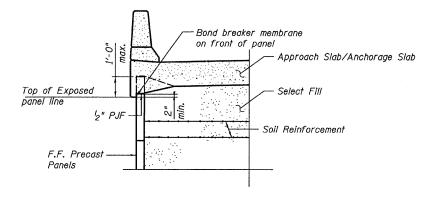

# SECTION THRU RETAINING WALLS

## NOTES

Offsets are to Front Face of precast panels.

For coping details see sheet 3.

For anchorage slab details, see sheets 6 & 7.

# RAMP 1 MSE ABUTMENT WALL SECTIONS STRUCTURE NO. 016-1304

TYLININTERNATIONAL

L	DESIGNED	-	JMA	REVISIONS	
	CHECKED	-	AMD, MMB	NAME	DATE
	DRAWN	-	JMA		
	CHECKED	-	AMD, MMB		
	DATE	-	03/25/2011		

SHEET	T NO. 2	F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		55	0711.2R & 1011.1BR	соок	741	565
10 SHEETS				CONTRACT NO. 60999		999
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT						