


EXISTING TYPICAL SECTION
STA. 88+92 TO STA. 124+63

LEGEND

- ① EXISTING CURB & GUTTER, TYPE B-6.24
- ② EXISTING HMA OVERLAY ±5 3/8"
- ③ EXISTING HMA BASE COURSE, 1 1/4"
- ④ EXISTING GRANULAR SUBBASE, 4"
- ⑤ EXISTING PCC PAVEMENT
- ⑥ PROPOSED HMA SURFACE REMOVAL 2"
- ⑦ PROPOSED HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70, 2"
- ⑧ PROPOSED CENTERLINE RUMBLE STRIP

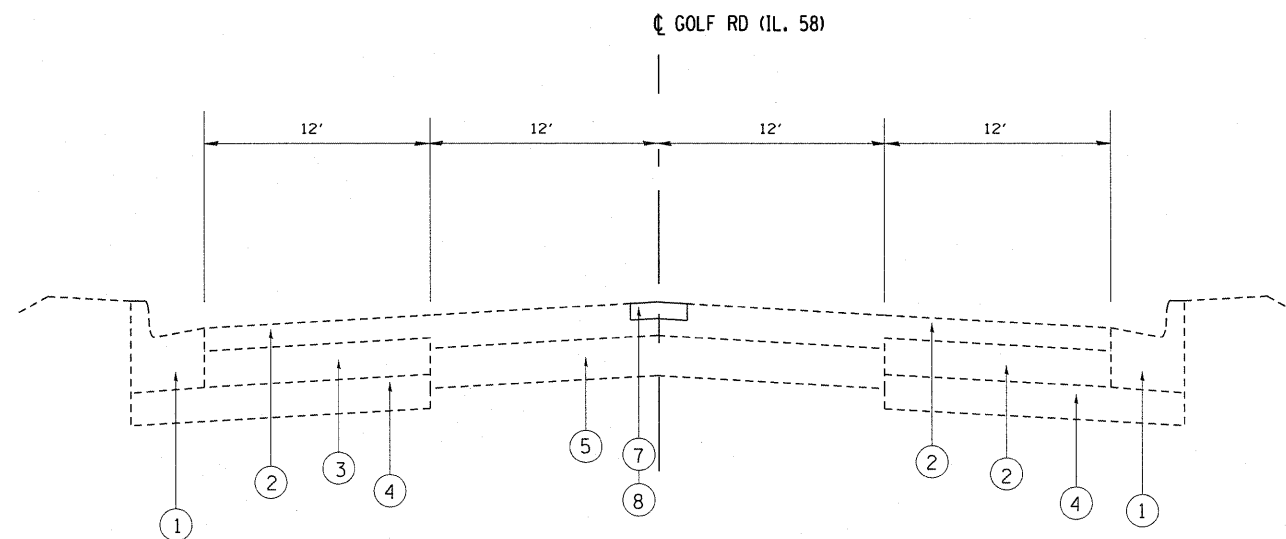

PROPOSED TYPICAL SECTION
STA. 88+92 TO STA. 124+63

HOT-MIX ASPHALT MIXTURE REQUIREMENTS	
MIXTURE TYPE	AIR VOIDS
CENTERLINE RESURFACING	
HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70 (IL 9.5 mm)	4% @ 70 GYR

THE UNIT WEIGHT USED TO CALCULATE ALL HMA SURFACE MIXTURE QUANTITIES IS 112 LB/ SQ YD/IN.

THE "AC TYPE" FOR POLYMERIZED HMA MIXES SHALL BE "SBS/SBR PG 70-22" AND FOR NON-POLYMERIZED HMA THE "AC TYPE" SHALL BE "PG 64 -22" UNLESS MODIFIED BY DISTRICT ONE SPECIAL PROVISIONS. FOR "PERCENT OF RAP" SEE DISTRICT ONE SPECIAL PROVISIONS.