


HMA MIXTURE DESIGNS


MIXTURE USE:	POLY SURFACE	POLY BINDER	SHOULDERS
AC/PG:	SBS PG 76-22	SBS PG 76-22	PG 64-22
RAP% (MAX):	0%	10%	30%
DESIGN AIR VOIDS:	4.0 % @ Ndes = 80	4.0 % @ Ndes = 90	2.0 % @ Ndes = 30
MIX COMPOSITION:			
(GRADATION MIXTURE)		IL 19.0	
FRICTION AGGREGATE	SMA	MIXTURE "B"	BAM

TOP LIFT SHOULDERS - DESIGN THIS MIX AT 2.0% VOIDS AND ADD ASPHALT TO REDUCE VOIDS TO 1.5%.

I-55 NB WORK ZONE LANE RESTRICTIONS

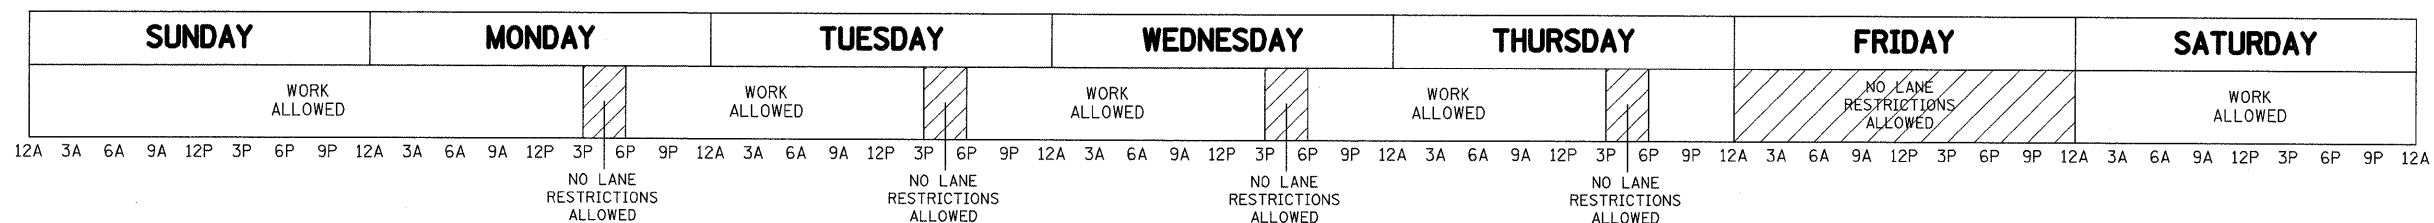

I-55 SB WORK ZONE LANE RESTRICTIONS

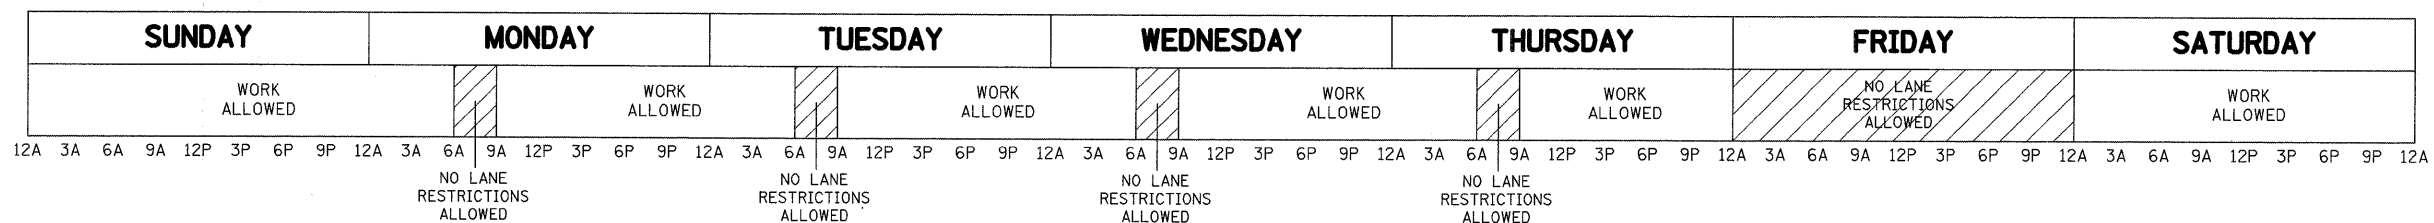

LAST SAVED = 3/16/2011 8:04:26 AM
 PEN TABLE = 18.461
 PLOT DRIVER = TR-V8puf-Blockup.t

FILE NAME =	USER NAME = jpettibone	DESIGNED -	REVISED -
h:\0906600\0906607\oad\plans\0876E94	sh-t-gennote.dgn	DRAWN -	REVISED -
	PLOT SCALE = 50,0000 ' / IN.	CHECKED -	REVISED -
	PLOT DATE = 3/16/2011 8:04:26 AM	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

HORNER &
SHIRIN, INC.
ENGINEERS

GENERAL NOTES & COMMITMENTS

SCALE: NONE SHEET NO. 2 OF 2 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
55/70	60-10W,60-10RS-1	MADISON	29	3
CONTRACT NO. 76E94			ILLINOIS FED. AID PROJECT	