


**EXISTING TYPICAL SECTION  
RAMP NW**

STA 1816+56.17 TO STA 1818+53.67

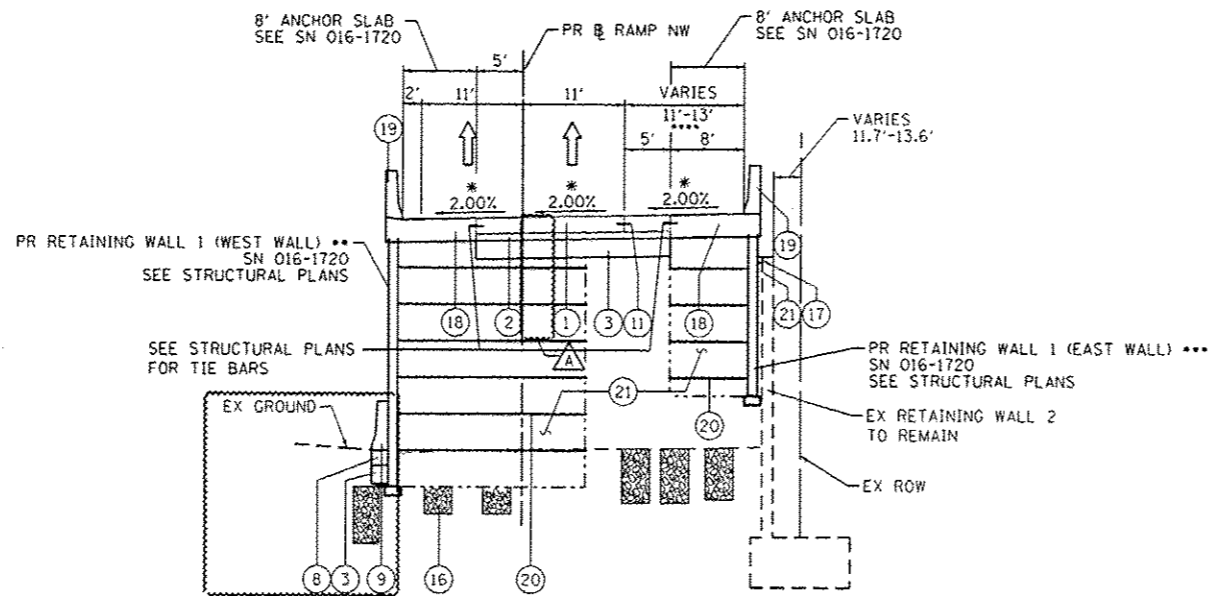

**PROPOSED TYPICAL SECTION  
RAMP NW**

STA 1816+56.17 TO STA 1818+53.67

• SEE NOTE 4

- \*\* PR RETAINING WALL 1 (WEST WALL) ENDS AT STA 1818+53.67
- \*\*\* PR RETAINING WALL 1 (EAST WALL) BEGINS AT STA 1816+56.17 AND ENDS AT STA 1818+46.17
- \*\*\*\* FUTURE TRAVEL LANE

BRIDGE APPROACH PAVEMENT CONNECTOR STA 1817+16.17 TO STA 1818+16.17  
 BRIDGE APPROACH PAVEMENT STA 1818+16.17 TO STA 1818+46.17 (SEE STRUCTURAL PLANS)  
 BRIDGE OMISSION STA 1818+45.67 TO STA 1838+23.67

**EXISTING**

- (A) CONTINUOUSLY REINFORCED PORTLAND CEMENT CONCRETE PAVEMENT, 13"
- (B) STABILIZED SUBBASE, 4"
- (C) POROUS GRANULAR EMBANKMENT, SPECIAL VARIES 0" TO 36"
- (D) PORTLAND CEMENT CONCRETE PAVEMENT, 12"
- (E) PIPE UNDERDRAIN 6", FABRIC LINED TRENCH
- (F) BITUMINOUS SHOULDER, 13"
- (G) CONCRETE BARRIER
- (H) CONCRETE MEDIAN SURFACE
- (I) SUBBASE GRANULAR MATERIAL, 12" & VARIES
- (J) BITUMINOUS SHOULDER, 10"

**PROPOSED**

- (1) PORTLAND CEMENT CONCRETE PAVEMENT 10 1/2" (JOINTED)
- (2) STABILIZED SUBBASE-HOT MIX ASPHALT, 4"
- (3) AGGREGATE SUBGRADE IMPROVEMENT 12"
- (4) PORTLAND CEMENT CONCRETE SHOULDERS 10 1/2"
- (5) RETAINING WALL / MSE WALL
- (6) ITEM REMOVED
- (7) TOPSOIL FURNISH AND PLACE, 4" SEEDING, CLASS 2A
- (8) CONCRETE BARRIER BASE
- (9) CONCRETE BARRIER, SINGLE FACE, 42" HEIGHT
- (10) CONCRETE BARRIER, DOUBLE FACE, 42" HEIGHT
- (11) LONGITUDINAL CONSTRUCTION JOINT, #6 EPOXY COATED BARS AT 30" CENTERS, INCLUDED IN COST OF PCC ITEMS
- (12) LONGITUDINAL CONSTRUCTION JOINT, #6 EPOXY COATED BARS AT 24" CENTERS, INCLUDED IN COST OF PCC ITEMS
- (13) TIE BARS, #6 EPOXY COATED BARS AT 24" CENTERS, INCLUDED IN COST OF COMBINATION CONCRETE CURB AND GUTTER TYPE B-6.24
- (14) PIPE UNDERDRAINS 6"
- (15) CHAIN LINK FENCE, 6"
- (16) AGGREGATE COLUMN (SEE STRUCTURAL PLANS)
- (17) CAST-IN-PLACE CONCRETE COPING SEAL WITH PJF (SEE STRUCTURAL PLANS)
- (18) ANCHOR SLAB (SEE STRUCTURAL PLANS)
- (19) PARAPET (SEE STRUCTURAL PLANS)
- (20) SOIL REINFORCEMENT (SEE STRUCTURAL PLANS)
- (21) LIGHTWEIGHT FILL (SEE STRUCTURAL PLANS)
- (22) TEMPORARY PAVEMENT
- (23) TEMPORARY CONCRETE BARRIER
- (24) SUBBASE GRANULAR MATERIAL, TYPE C 4"
- (25) CONCRETE MEDIAN SURFACE, SPECIAL - 4"
- (26) POROUS GRANULAR EMBANKMENT
- (27) PORTLAND CEMENT CONCRETE PAVEMENT 10" (JOINTED)
- (28) PORTLAND CEMENT CONCRETE SHOULDER, 10"
- (29) TEMPORARY CONCRETE BARRIER (TO REMAIN PERMANENTLY)
- (30) POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90, (IL-9.5 MM); 1 3/4"
- (31) HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N70; 2 1/4"
- (32) HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70, (IL-9.5 MM); 2"

**NOTES:**

1. THE ADDITIONAL THICKNESS OF AGGREGATE SUBGRADE IMPROVEMENT UNDER THE SHOULDER TO DRAIN TO UNDERDRAINS SHALL BE INCLUDED IN THE COST PER SQ. YD. OF AGGREGATE SUBGRADE IMPROVEMENT 24".
2. THE MAXIMUM ROLLOVER BETWEEN THE PAVEMENT AND THE SHOULDER ON THE HIGH SIDE OF THE SUPERELEVATION IS 8.0%.
3. FOR PORTLAND CEMENT CONCRETE PAVEMENT (JOINTED) DETAILS, SEE JOINTING AND PCC PAVEMENT DETAIL PLAN.
4. SEE SE TRANSITION DATA TABLE FOR SUPERELEVATION TRANSITIONS.
5. SEE GRADING PLAN FOR GRADING LIMITS AND SLOPES.
6. SEE ROADWAY DETAILS FOR ADDITIONAL INFORMATION AND LIMITS OF VARIOUS TYPES OF CONCRETE BARRIERS.
7. TIE BARS FOR BARRIER WALLS ARE NOT SHOWN ON THE TYPICAL SECTIONS FOR CLARITY.

BOXED ITEMS ARE INCLUDED IN THE COST OF THE CONTRACT.

FILE PATH: C:\Users\alvarez\OneDrive\Work\Projects\Illinois\60W28\28-ehs-typical-03.dgn



D:\60W28-ehs-typical-03.dgn  
 USER NAME: alvarez  
 PLOT SCALE: 20.0000' / 1" / 1"  
 PLOT DATE: 5/27/2014

DESIGNED - KAM	REVISED - 05/27/2014
DRAWN - NSA	REVISED -
CHECKED - KCF	REVISED -
DATE - 04/28/14	REVISED -

STATE OF ILLINOIS  
 DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS		F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
SCALE: NONE	SHEET 3 OF 11 SHEETS	90/94/290	2013-010R	COOK	747	24
				CONTRACT NO. 60W28		
ILLINOIS FED. AID PROJECT						