


TYPICAL SECTION

MM 45.6 TO MM 61.6 (OMIT MM 58.0 TO MM 58.7)

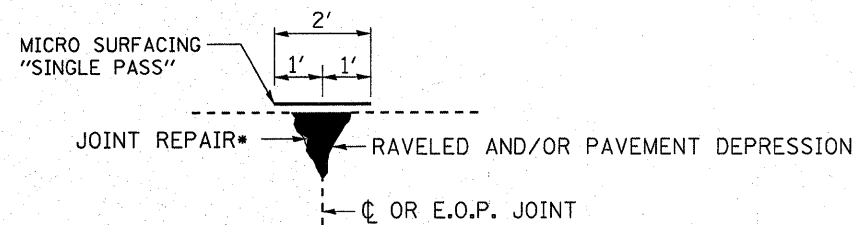

MICRO-SURFACING DETAIL

* MIXTURE FOR CRACKS, JOINTS, AND FLANGEWAYS

NOTES

- 1). LOCATIONS OF MICRO-SURFACING SHALL BE LOCATED AT THE CENTERLINE OF PAVEMENT JOINT OR A COMBINATION OF THE CENTERLINE OF PAVEMENT JOINT AND/OR EDGE OF PAVEMENT JOINTS. ACTUAL LOCATIONS SHALL BE FIELD DETERMINED BY THE ENGINEER PRIOR TO THE CONTRACTOR BEGINNING HIS/HER CONSTRUCTION OPERATIONS.
- 2). OFFSET OF THE CENTERLINE PAVEMENT STRIPING SHALL BE FIELD DETERMINED BY THE ENGINEER.

FILE NAME =	USER NAME = brebaypc	DESIGNED - RON WOODSHANK	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TYPICALS	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
ci\pwwork\PIWIDOT\BRABOYPC\d8180748\d36	6a16-shit-cover.dgn	DRAWN - RON WOODSHANK	REVISED -			80	(06-3,ARS-3; 5,6RS-2)	BUREAU	6	4	
PLOT SCALE = 50.0000' / IN.	CHECKED -	REVISIED -	REVISIED -			CONTRACT NO. 66A16					
PLOT DATE = Mar 30, 2010 - 08:48:08 AM	DATE -	REVISIED -	REVISIED -			ILLINOIS					
				SCALE: _____ SHEET NO. 1 OF 1 SHEETS		STA. _____ TO STA. _____					