


NOTE: Remove and replace areas of damaged and debonded waterproofing membrane. Overlap new membrane over existing membrane a minimum of 6".

The plan quantities for deck resurfacing are estimated quantities. The areas shown on the deck plan are potential areas of deck resurfacing. The quantities are included as contingencies to be used as directed by the engineer during construction.

**GENERAL PLAN UNITS F & G**

Note: Dimensions shown are taken from existing plans.

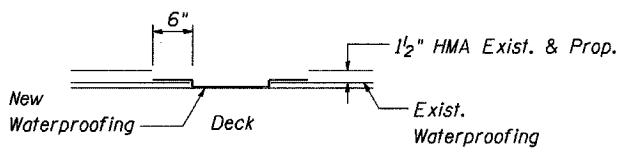

Waterproofing Repair Detail

**Legend**



Limits of Hot Mix Asphalt Surface Removal (Deck), Sheet Waterproofing Membrane System, and Hot Mix Asphalt Surface Course, Mix "E", N90

Deck Survey Date: April 25, 2008

FILE NAME =	USER NAME = linkdj	DESIGNED -	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	SCALE: _____ SHEET NO. _____ OF _____ SHEETS STA. _____ TO STA. _____	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
D:\BR\CADD plane\Rock Island County\081142 & 0143\0810142&0143.dgn	DRAWN -	REVISED -	74			(81-1HVB & 81-1HVB-1M-1)	ROCK ISLAND	19	10	
PLOT SCALE = 50.0000' / IN.	CHECKED -	REVISED -	CONTRACT NO. 64E28							
PLOT DATE = Tue May 06 10:16:26 2008	DATE -	REVISED -	FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT							