




57+69.5

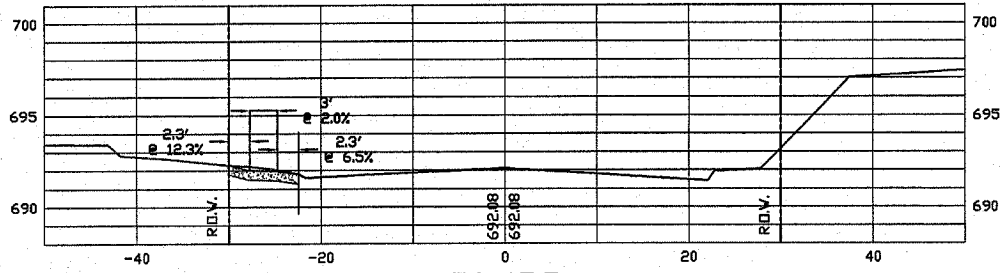


56+15.5

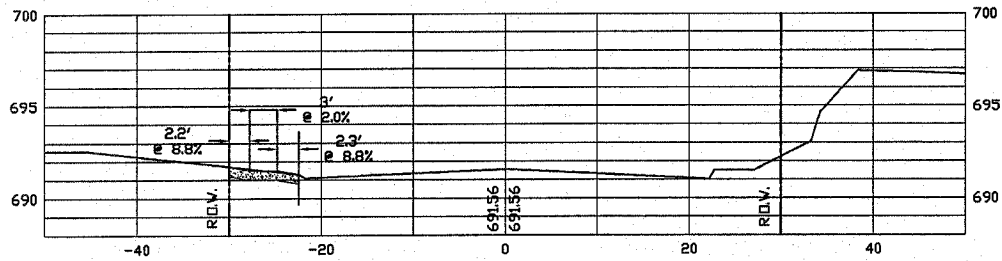


53+50

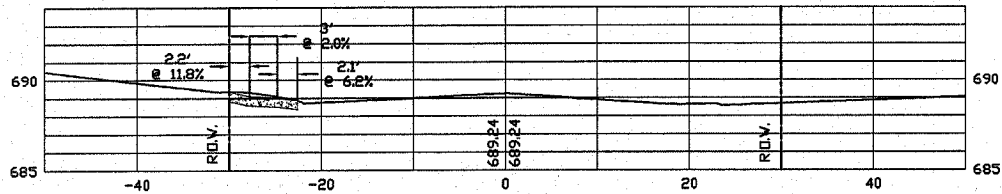



52+93

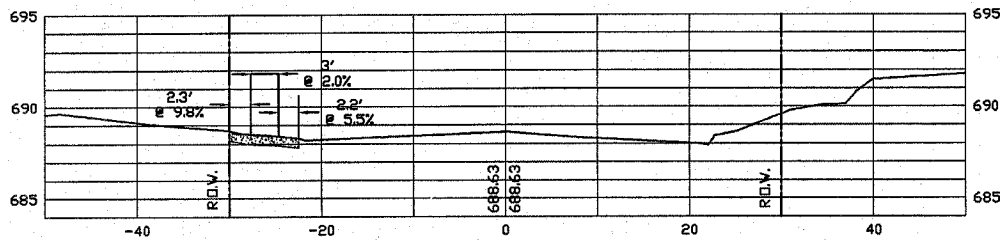

52+41

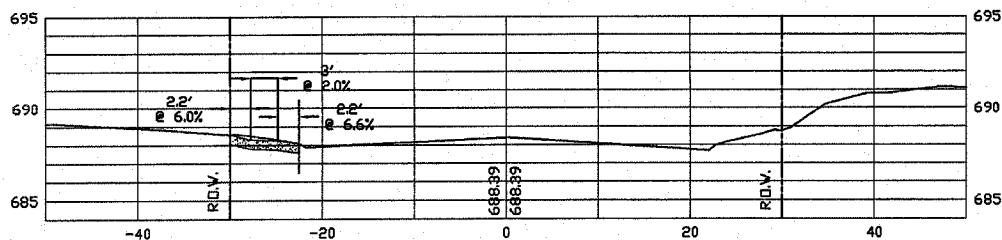

51+92.5

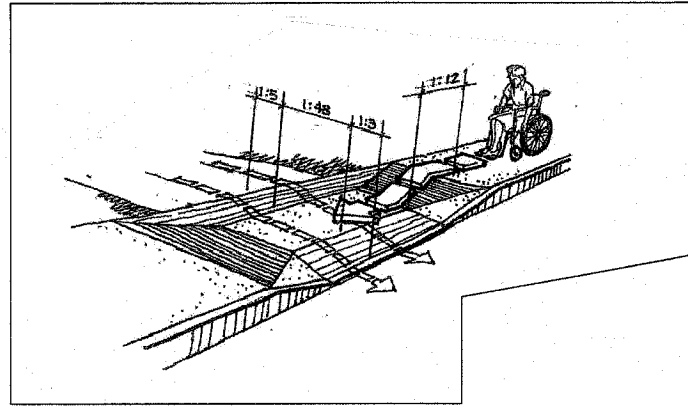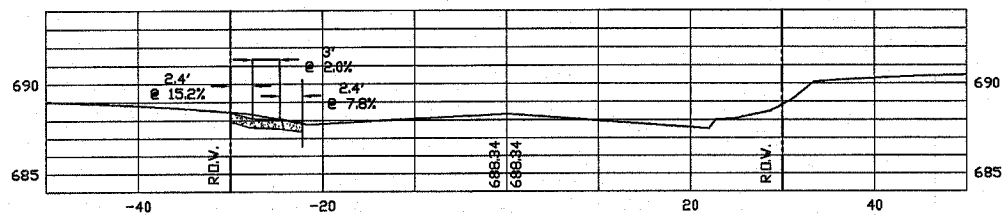

Typical Proposed Driveway Section to Meet ADA Standards

All Slopes Shown Are Maximum Allowable

(1:5 Slope = 20%)


(1:48 Slope = 2%)

(1:12 Slope = 8.33%)


(1:3 Slope = 33%)

(Taken from Accessible Rights-of-Way: A Design Guide Published by the U.S. Architectural and Transportation Barriers Compliance Board)

58+80

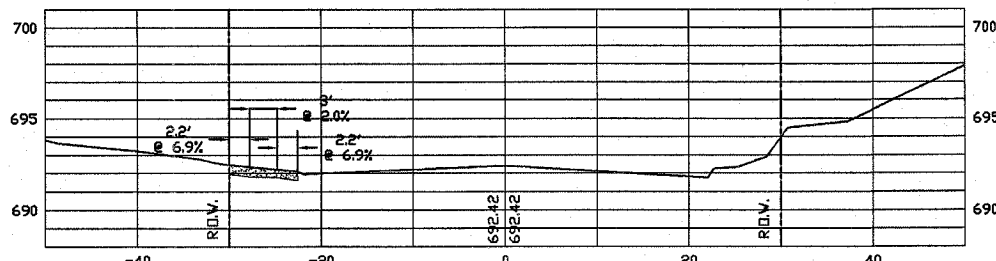

58+34.5

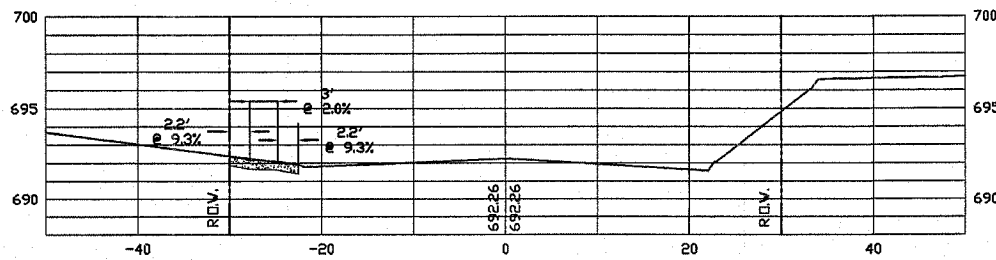

85434

**Section #06-00180-00-RS**  
**Driveway Cross Sections**  
**CITY OF ROCK ISLAND**  
**ENGINEERING DIVISION**  
 24th Street Resurfacing  
 18th Avenue to 25th Avenue

Job Number	Date
2569	3-19-2005
Computer Drawing Name	By
	mdv
	Sheet
	31
	Of
	38