


CA006

REVISIONS		
NUMBER	BY	DATE




EARTHWORK SUMMARY


Perimeter Road		
STATION	EXCAVATE END AREA (S.F.)	EMBANK END AREA (S.F.)
2180+09.89	20.06	0.00
2180+50	11.89	8.99
2181+00	124.67	0.00
2181+50	50.32	0.00
2181+90	49.66	0.00
2182+50	0.00	0.00
2183+00	29.17	0.90
2183+50	10.77	2.78
2184+00	3.97	16.20
2184+50	13.36	3.06
2185+13.97	7.80	5.68
2185+50	10.93	4.95
2186+00	13.79	2.38
2186+50	18.54	1.08
2187+00	18.37	0.21
2187+50	20.05	0.03
2188+00	22.80	0.00
2188+50	20.62	0.07
2189+00	16.13	0.75
2189+50	19.18	0.33
2190+10.32	20.86	0.00
2194+33.12	19.74	0.00
2194+50	14.20	1.03
2195+00	0.88	7.93
2195+50	0.00	29.14
2196+00	0.00	42.91
2196+50	3.26	47.73
2197+00	0.11	23.15
2197+50	22.22	2.45
2198+06.18	27.20	0.40
2198+56.18	19.97	0.12
2199+00	23.07	2.58
2199+50	17.23	6.61
2200+00	3.93	7.05
2200+50	3.90	6.23
2201+00	2.44	4.00
2201+25	1.77	4.61

EARTHWORK SUMMARY

Road Removal		
STATION	EXCAVATE END AREA (S.F.)	EMBANK END AREA (S.F.)
0+00	0.14	24.32
0+50	6.18	10.74
1+00	39.18	0.00
1+50	58.31	4.39
2+00	71.46	0.76
2+50	49.72	0.00
3+00	33.72	0.00
3+50	23.95	0.09

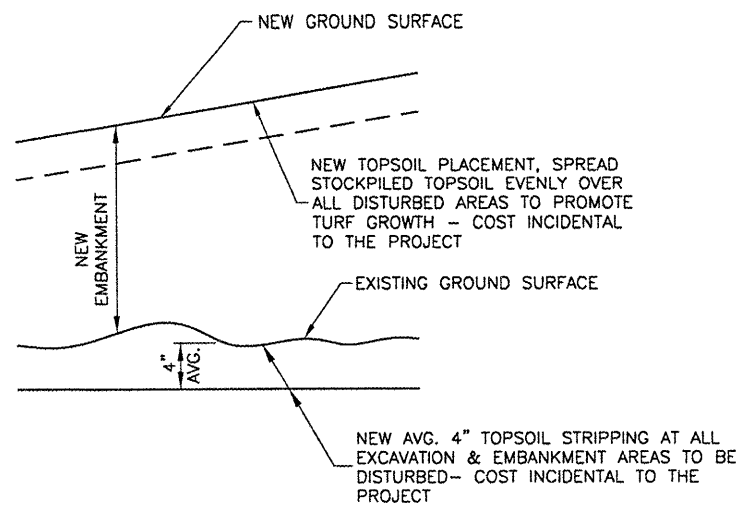


TOPSOIL STRIPPING DETAIL
N.T.S.



SPRINGFIELD AIRPORT AUTHORITY
ABRAHAM LINCOLN CAPITAL AIRPORT
SPRINGFIELD, IL

TXV G WIDENING-PHASE 1 REALIGN NORTH PERIMETER ROAD

EARTHWORK SUMMARY



CMT
 CRAWFORD, MURPHY & TILLY, INC.
 CONSULTING ENGINEERS
 License No. 84-000513

© Copyright CMT, Inc.

DESIGN BY:	CBG
DRAWN BY:	DPA/JLR
CHECKED BY:	CBG
APPROVED BY:	RLV
DATE:	APRIL 25, 2008
JOB No:	07035-09-00
IL PROJ. NO.	SPI-3789
AIP PROJ. NO.	3-17-0096-XX
SHEET	16 OF 22 SHEETS