

STANDARD BAR SPLICER ASSEMBLY

Minimum Lap Lengths							
Bar size to be spliced	Table 1	Table 2	Table 3	Table 4	Table 5	Table 6	
3, 4	1'-5''	1'-11''	2'-1''	2'-4''	2'-7''	2'-11''	
5	1'-9''	2'-5''	2'-7''	2'-11''	3'-3''	3'-8''	
6	2'-1''	2'-11''	3′-1′′	3'-6''	3′-10′′	4'-5''	
7	2'-9''	3′-10′′	4'-2''	4'-8''	5'-2''	5′-10′′	
8	3′-8′′	5′-1′′	5′-5′′	6'-2''	6′-9′′	7'-8''	
9	4'-7''	6'-5''	6′-10′′	7'-9''	8'-7''	9′-8′′	

Table 1: Black bar, 0.8 Class C

Table 2: Black bar, Top bar lap, 0.8 Class C

Table 3: Epoxy bar, 0.8 Class C Table 4: Epoxy bar, Top bar lap, 0.8 Class C


Table 5: Epoxy bar, Class C

Table 6: Epoxy bar, Top bar top, Class C

Threaded splicer bar length = min. lap length + l_2'' + thread length


* Epoxy not required on Bar Splicer Assembly components used in conjunction with black bars.


Location	Bar size	No. assemblies required	Table for minimum lap length
Top Slab	#5	54	
West Wall	#5	10	
Center Wall	#5	10	
East Wall	#5	10	
Bottom Slab	#5	54	

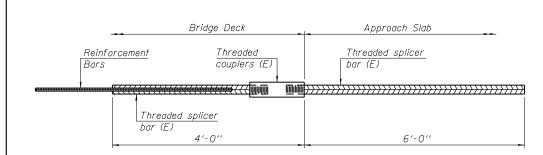

BAR SPLICER ASSEMBLY FOR #5 BAR ON INTEGRAL OR SEMI-INTEGRAL ABUTMENTS

No. required = O

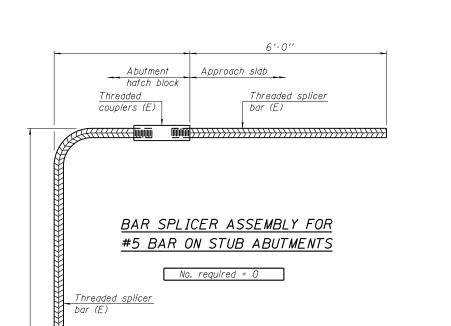

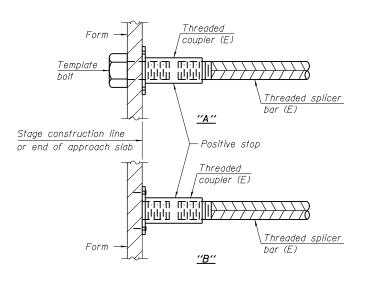


INSTALLATION AND SETTING METHODS

"A" : Set bar splicer assembly by means of a template bolt. "B" : Set bar splicer assembly by nailing to wood forms or cementing to steel forms. (E) : Indicates epoxy coating.

= \$DATE\$ = \$FILEL\$	BSL
DATE NAME	USER NAME =
ADA	PLOT SCALE =
드닉	PLOT DATE =
밀匠	FILE NAME =

- 1	1-27-12

BSD-1	1-27-12				
R NAME =	DESIGNED - MBC	REVISED -			BAR SPLICER ASSEMBLY AND MECH
T SCALE =	DRAWN - SSR	REVISED -	DB STERLIN CONSULTANTS, INC. 123 N. WACKER DRIVE SUITE 2000	STATE OF ILLINOIS	
T DATE =	CHECKED - GFP	REVISED -	CHICAGO, ILLINOIS 60606 TEL. (312)857-1006 FAX. (312)857-1056	DEPARTMENT OF TRANSPORTATION	STRUCTURE NO. 04
NAME =	DATE - 5/12/14	REVISED -	_		SHEET NO. S7 OF S9 SH

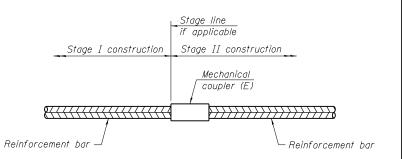

STANDARD MECHANICAL SPLICER

Location	Bar size	No. assemblies required

NOTES

1. Splicer bars shall be deformed with threaded ends and have a minimum 60 ksi yield strength.

2. All reinforcement shall be lapped and tied to the splicer bars.

Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars. See Section 508 of the Standard Specifications. 3. See approved list of bar splicer assemblies and mechanical splicers for alternatives.

ECHANICAL SPLICER DETAILS 0.045–2041		SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		106-S-N-1	KANE	167	101
			CONTRACT	NO. 60	DT10
S9 SHEETS	FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				