

STANDARD BAR SPLICER ASSEMBLY

Minimum Lap Lengths						
Bar size to be spliced	Table 1	Table 2	Table 3	Table 4	Table 5	Table 6
3, 4	1'-5''	1'-11''	2'-1''	2'-4''	2'-7''	2'-11''
5	1'-9''	2'-5"	2'-7''	2'-11''	3'-3''	3′-8′′
6	2'-1''	2'-11''	3'-1''	3′-6′′	3′-10′′	4'-5"
7	2'-9''	3'-10''	4'-2"	4'-8''	5′-2′′	5′-10′′
8	3′-8′′	5′-1′′	5′-5′′	6'-2''	6′-9′′	7′-8′′
9	4'-7''	6′-5′′	6′-10′′	7′-9′′	8'-7''	9'-8''

Table 1: Black bar, 0.8 Class C

Table 2: Black bar, Top bar lap, 0.8 Class C

Table 3: Epoxy bar, 0.8 Class C

Table 4: Epoxy bar, Top bar lap, 0.8 Class C


Table 5: Epoxy bar, Class C

Table 6: Epoxy bar, Top bar top, Class C

Threaded splicer bar length = min. lap length + 1^{l_2} " + thread length


* Epoxy not required on Bar Splicer Assembly components used in conjunction with black bars.

Location	Bar	No. assemblies	Table for minimum	
	Jeanon	size	required	lap length
T	op Slab	#5	14	1
Bo	ott. Slab	#5	14	1
Si	idewalls	#5	8	1
	-			



BAR SPLICER ASSEMBLY FOR #5 BAR ON INTEGRAL OR SEMI-INTEGRAL ABUTMENTS


No, required =

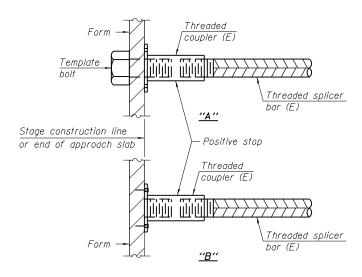

INSTALLATION AND SETTING METHODS


"A": Set bar splicer assembly by means of a template bolt.
"B": Set bar splicer assembly by nailing to wood forms or cementing to steel forms.

(E): Indicates epoxy coating.

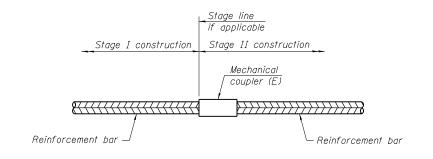

STANDARD MECHANICAL SPLICER

Location	Bar size	No. assemblies required

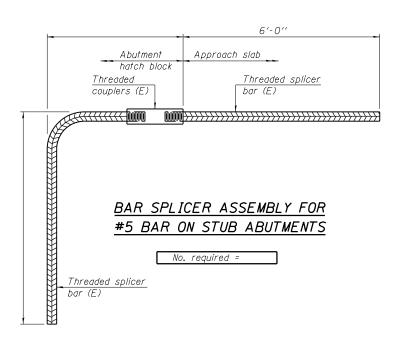

NOTES

Splicer bars shall be deformed with threaded ends and have a minimum 60 ksi yield strength.

All reinforcement shall be lapped and tied to the splicer bars.

Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars. See Section 508 of the Standard Specifications.

See approved list of bar splicer assemblies and mechanical splicers for alternatives.

BSD-1

1-27-12

 	USER NAME =	DESIGNED - BDC	REVISED
	FILE NAME =	CHECKED - MTH	REVISED
Consulting Engineers Springfield, Illinois	PLOT SCALE =	DRAWN - AJF	REVISED
Springheid, Illinois	PLOT DATE =	CHECKED - XX	REVISED

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BAR SPLICER ASSEMBLY DETAILS	F.A.P. RTE.	
SN 083-7095	332	
014 000-7000		
SHEET NO. 5A OF 5 SHEETS		

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
332	(29,30)R-1	SALINE	745	479A
CONTRACT NO. 78077				
	ILLINOIS FED. A	ID PROJECT		