


(FOR BUTT JOINT AND HMA TAPER SEE DETAIL BELOW)

OPTION 1

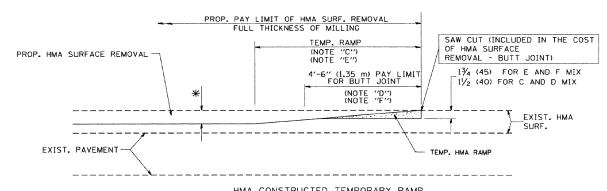


HMA CONSTRUCTED TEMPORARY RAMP

(FOR BUTT JOINT AND HMA TAPER SEE DETAIL BELOW)

OPTION 2


TYPICAL TEMPORARY RAMP

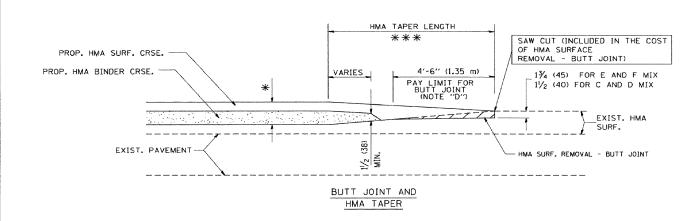


TYPICAL BUTT JOINT AND HMA TAPER FOR MILLING AND RESURFACING

REVISED	*	R. SHAH 10-25-94
REVISED	-	A. ABBAS 03-21-97
REVISED	-	M. COMEZ 04-06-01
REVISED	-	R. BORO 01-01-07

BUTT JOINT AND HMA TAPER DETAILS

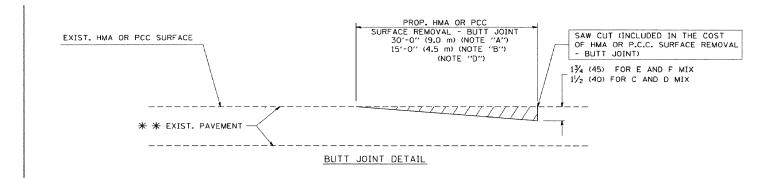

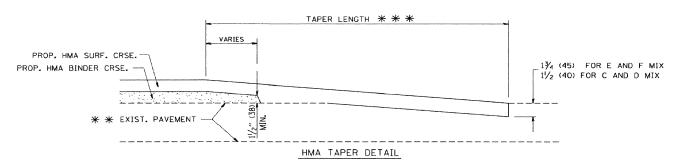

TYPICAL BUTT JOINT AND HMA TAPER FOR RESURFACING ONLY

* * PC CONCRETE, HMA OR HMA RESURFACED PAVEMENT.

NOTES

- A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.
- B: MINOR SIDE ROADS.
- C: THE TEMP. RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING HMA SURFACE.
- D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED HMA COURSES.
- E: TAPER THE TEMP. RAMP AT A RATE OF 3'-0" (900 mm) PER 1 INCH (25 mm) OF MILLING THICKNESS.
- F: INSTALLATION AND REMOVAL OF THE 4'-6" (1.35 m) TEMP. RAMP IS INCLUDED IN COST OF HMA SURFACE REMOVAL BUTT JOINT
- G: SEE ARTICLE 406.08 AND 406.14 OF THE STANDARD SPECIFICATIONS FOR "HMA AND/OR PCC SURFACE REMOVAL, BUTT JOINT".
- * SEE TYPICAL SECTIONS FOR MILLING THICKNESS.
- *** * * * 20'-0" (6.1 m) PER 1 (25) RESURFACING (NOTE "A") 10'-0" (3.0 m) PER 1 (25) RESURFACING (NOTE "B")

BASIS OF PAYMENT:

THE BUTT JOINT WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE YARD (SQUARE METER) FOR "HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT" OR FOR "PORTLAND CEMENT CONCRETE SURFACE REMOVAL - BUTT JOINT".

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

	DESIGNED	-	MJY	
	DRAWN	-	ST, TSC	REVISED -
CONSULTING ENGINEERS 1560 WALL ST, SUITE 222	CHECKED	-	MJY, SLV	REVISED -
NAPERVILLE, ILLINOIS 60563 PH: (630) 577-9100	DATE	-	03/26/2010	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DISTRICT ONE DETAIL SHEETS							
· I	L ROUTE 59 OVER FLINT CREEK TRIBUTARY						
SCALE: NONE	SHEET NO. 5 OF 11 SHEETS STA. 98+00 TO STA. 101+60						

-	F.A.P. RTE.	F.A.P. SECTION 338 108 B-1		COUNTY	TOTAL SHEETS	SHEET NO.
-	338			LAKE	40	34
	D-90-289-09		CONTRACT	NO. 6	0F92	
	FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT					