



OFFSET	POINT LAY-OUT										CHORD OFFSET DATA					
	E	B°	A		B		C		D		1/8 & 7/8	1/4 & 3/4	3/8 & 5/8		1/2	
			X	Y	X	Y	X	Y	X	Y	O/S	DIST	O/S	DIST	O/S	DIST
10	50.23	3.06	0	0	112.2	3.0	187.1	7.0	299.2	10.0	0.3	14.0	0.6	28.0	0.7	42.1
12	44.94	3.43	0	0	125.6	3.8	200.4	8.2	326.0	12.0	0.4	15.7	0.7	31.4	0.9	47.1
14	40.96	3.77	0	0	138.0	4.5	212.8	9.5	350.8	14.0	0.5	17.3	0.9	34.5	1.1	51.8
16	37.86	4.08	0	0	149.5	5.3	224.3	10.7	373.9	16.0	0.6	18.7	1.0	37.4	1.2	56.1
18	35.34	4.38	0	0	160.4	6.1	235.2	11.9	395.6	18.0	0.7	20.1	1.2	40.1	1.4	60.2
20	33.26	4.66	0	0	170.7	7.0	245.5	13.0	416.2	20.0	0.8	21.4	1.3	42.7	1.6	64.1
22	31.50	4.93	0	0	180.5	7.8	255.3	14.2	435.8	22.0	0.9	22.6	1.5	45.2	1.8	67.8
24	30.00	5.19	0	0	189.9	8.6	264.6	15.4	454.6	24.0	0.9	23.8	1.6	47.5	2.0	71.3
26	28.68	5.44	0	0	199.0	9.4	273.6	16.6	472.6	26.0	1.0	24.9	1.8	49.8	2.2	74.7
28	27.53	5.67	0	0	207.7	10.3	282.3	17.7	489.9	28.0	1.1	26.0	1.9	52.0	2.4	78.0
30	26.51	5.90	0	0	216.0	11.1	290.6	18.9	506.7	30.0	1.2	27.0	2.1	54.1	2.6	81.1
32	25.59	6.13	0	0	224.2	12.0	298.7	20.0	522.9	32.0	1.3	28.0	2.3	56.1	2.8	84.2
34	24.76	6.34	0	0	232.0	12.9	306.6	21.1	538.6	34.0	1.4	29.0	2.4	58.1	3.0	87.1
36	24.02	6.55	0	0	239.7	13.7	314.2	22.3	553.8	36.0	1.5	30.0	2.6	60.0	3.2	90.0
38	23.33	6.76	0	0	247.1	14.6	321.6	23.4	568.7	38.0	1.6	30.9	2.7	61.9	3.4	92.8
40	22.71	6.96	0	0	254.3	15.5	328.8	24.5	583.1	40.0	1.7	31.8	2.9	63.7	3.6	95.5
42	22.13	7.15	0	0	261.4	16.3	335.8	25.7	597.2	42.0	1.8	32.7	3.1	65.4	3.8	98.2
44	21.60	7.34	0	0	268.3	17.2	342.7	26.8	611.0	44.0	1.9	33.6	3.2	67.2	4.0	100.8
46	21.11	7.53	0	0	275.0	18.1	349.4	27.9	624.4	46.0	2.0	34.4	3.4	68.9	4.2	103.3
48	20.65	7.71	0	0	281.6	19.0	356.0	29.0	637.6	48.0	2.1	35.2	3.6	70.5	4.5	105.8
50	20.22	7.89	0	0	288.1	19.9	362.4	30.1	650.5	50.0	2.2	36.1	3.7	72.2	4.7	108.3
52	19.82	8.06	0	0	294.4	20.7	368.7	31.3	663.1	52.0	2.3	36.9	3.9	73.7	4.9	110.7
54	19.44	8.23	0	0	300.6	21.6	374.9	32.4	675.5	54.0	2.4	37.6	4.1	75.3	5.1	113.0
56	19.09	8.40	0	0	306.7	22.5	380.9	33.5	687.7	56.0	2.5	38.4	4.2	76.8	5.3	115.3
58	18.76	8.56	0	0	312.7	23.4	386.9	34.6	699.6	58.0	2.6	39.2	4.4	78.3	5.5	117.6
60	18.44	8.73	0	0	318.6	24.3	392.7	35.7	711.4	60.0	2.7	39.9	4.6	79.8	5.7	119.8

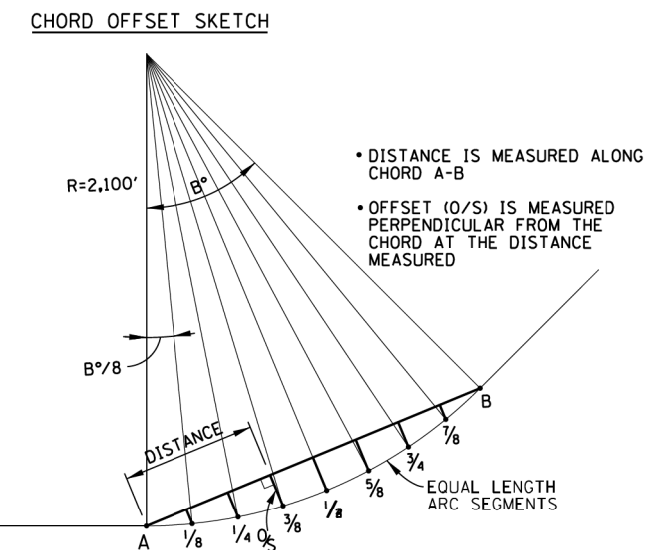

- GENERAL NOTES:**
1. REVERSE CURVE INFORMATION CAN BE USED FOR SINGLE LANE OR MULTILANE TRAFFIC FLOWS, SHIFTING RIGHT TO LEFT (AS SHOWN) OR LEFT TO RIGHT BY CHANGING TO THE APPROPRIATE ADVANCE WARNING SEQUENCE.
  2. THE REVERSE CURVE SHALL NOT BE USED OUTSIDE THE ACTIVITY AREA. LANE SHIFTS IN ADVANCE OF OR ON THE APPROACH TO THE ACTIVITY AREA SHALL BE IMPLEMENTED WITH A SHIFT RATE OF 83:1.
  3. LANE SHIFTS FOR DEPARTURES OUT OF THE ACTIVITY AREA SHALL BE IMPLEMENTED WITH A SHIFT RATE OF 75:1.

  
 APPROVED ..... CHIEF ENGINEER ..... DATE 2-7-2012 ...

DATE	REVISIONS	 <b>MAINTENANCE OF TRAFFIC REVERSE CURVE</b> <b>STANDARD E4-02</b>
1-1-2011	ADDED SIGN COLOR DESIGNATION AND REVISED NOTES, MODIFIED LANE WIDTH DIMENSION/TABLE DATA.	
2-7-2012	REVISED NOTES	

BOWMAN, BARRETT & ASSOCIATES INC.  
 CONSULTING ENGINEERS  
 Chicago, Illinois  
 312.228.0100  
 www.bbainc.com

FILE NAME = #FILES#	USER NAME = default	DESIGNED -	REVISED -	<b>STATE OF ILLINOIS</b> <b>DEPARTMENT OF TRANSPORTATION</b>	<b>TOLLWAY STANDARD DRAWING</b>		F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
	PLOT SCALE = H=1"=10' V=1"=5'	DRAWN -	REVISED -		SCALE:	SHEET NO. N/A OF N/A SHEETS	STA.	94	49-1-R-1	LAKE	677	660
	PLOT DATE = 6/18/2012	CHECKED - RGR	REVISED -				TO STA.	<b>CONTRACT NO. 60L77</b>				
		DATE - 6/19/2012	REVISED -		ILLINOIS FED. AID PROJECT							

S:\1101\95\CADD\60L77\_IL\_175\60L77\_sht-15114.dwg