

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NUMBER
VARIOUS	2010-023 BP	VARIOUS	93	4

Contract 60K48

## GENERAL NOTES FOR PAINT

CLEANING AND PAINTING OF THE EXISTING STRUCTURAL STEEL SHALL BE AS SPECIFIED IN THE SPECIAL PROVISION FOR "CLEANING AND PAINTING EXISTING STEEL STRUCTURES".

A MINIMUM OF FOUR (4) AIR MONITORS WILL BE REQUIRED AT ALL LOCATIONS, EXCEPT TWO (2) MINIMUM WILL BE REQUIRED AT LOCATIONS 1(SN 045-0035) AND 2(SN 045-0036), TO MONITOR ABRASIVE BLASTING OPERATIONS FOR ALL STRUCTURES. SEE SPECIAL PROVISION FOR "CONTAINMENT AND DISPOSAL OF LEAD PAINT CLEANING RESIDUE."


THE AREAS DESIGNATED TO BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10 SHALL BE PAINTED ACCORDING TO THE REQUIREMENTS OF PAINT SYSTEM 1 - OZ/E/U. THE COLOR OF THE FINAL FINISH COAT FOR ALL INTERIOR STEEL SURFACES AND HAND RAILINGS/FENCE POSTS AT LOC'S 4(SN 016-0821), 6(SN 016-0831), 7(SN 016-0834), 12(SN 016-0719) AND 16(SN 016-0528) SHALL BE GRAY, MUNSELL NO 5B 7/1. THE COLOR OF THE FINAL FINISH COAT FOR THE EXTERIOR AND BOTTOM FLANGE OF THE FASCIA BEAMS SHALL BE REDDISH BROWN, MUNSELL NO 2.5YR 3/4.

ALL ITEMS (SUCH AS, BUT NOT LIMITED TO: CONDUITS, BRACKETS AND DECK DRAINS) ATTACHED TO THE OUTSIDE OF THE FASCIA BEAMS SHOULD BE CLEANED AND PAINTED.

**LOC'S 1(SN 045-0035), 2(SN 045-0036), 3(SN 016-0545), 5(SN 016-0943), 8(SN 016-0364), 9(SN 016-0839), 10(SN 016-0815), 11(SN 016-0811), 13(SN 016-0367), 14(SN 016-0251), 15(SN 016-0355) AND 17(SN 049-0029):**  
ALL BEAMS, BEARINGS AND OTHER STRUCTURAL STEEL WITHIN FIVE (5) FT., (MEASURED ALONG THE BEAM) OF EITHER SIDE OF ALL DECK JOINTS\*, SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10. THE EXTERIOR SURFACES AND TOP AND BOTTOM OF THE BOTTOM FLANGE OF THE FASCIA BEAMS (SEE FIGURE 1) SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10.


**LOC'S 4(SN 016-0821), 6(SN 016-0831), 7(SN 016-0834) AND 12(SN 016-0719):**  
ALL BEAMS, BEARINGS AND OTHER STRUCTURAL STEEL WITHIN FIVE (5) FT., (MEASURED ALONG THE BEAM) OF EITHER SIDE OF ALL DECK JOINTS, SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10. ALL FENCE POSTS AT LOC'S 4(SN 016-0821) AND 6(SN 016-0831) AND THE ENTIRE HAND RAILING AT LOCATIONS 4(SN 016-0821), 6(SN 016-0831), 7(SN 016-0834) AND 12(SN 016-0719) SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10. THE EXTERIOR SURFACES AND TOP AND BOTTOM OF THE BOTTOM FLANGE OF THE FASCIA BEAMS (SEE FIGURE 1) SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10.

**LOC 16(SN 016-0528):**  
ALL BEAMS, BEARINGS AND OTHER STRUCTURAL STEEL WITHIN FIVE (5) FT., (MEASURED ALONG THE BEAM) OF EITHER SIDE OF ALL DECK JOINTS, SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10. THE ENTIRE HAND RAILING SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10. THE EXTERIOR SURFACES AND TOP AND BOTTOM OF THE BOTTOM FLANGE OF THE FASCIA BEAMS (SEE FIGURE 1) SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10. THE TOP AND BOTTOM FLANGE OF SECOND INTERIOR BEAMS #2 AND 9 (SEE FIGURE 2) SHALL ALSO BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10.

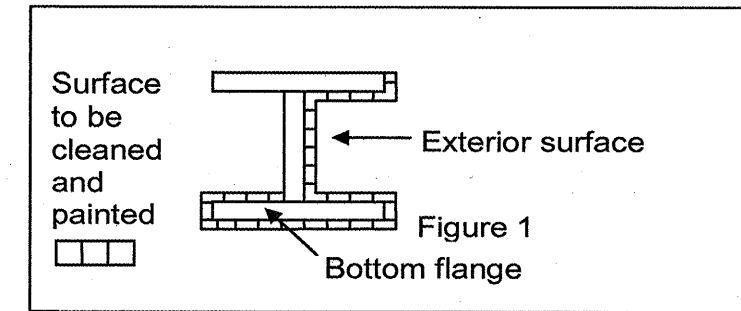

**FASCIA BEAM PAINTING DETAIL**

**FIGURE 1**

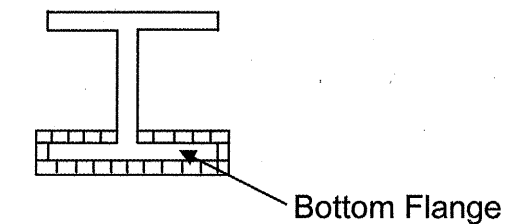

**FIGURE 2**

\*DECK JOINTS AT LOC 17(SN 049-0029) ARE DEFINED AS TRANSVERSE JOINTS ONLY.

ILLINOIS DEPARTMENT OF TRANSPORTATION

GENERAL PAINT NOTES