

URBAN
1001.STATE

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NUMBER
VARIOUS	2010-027-1	COOK	19	3

CONTRACT NO.: 60K63

CONSTRUCTION CODE TYPE: SFTY - 1B		COOK CO.	
CODE NO.	ITEMS	UNITS	TOTAL QUANTITIES
40603335	HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N50	TON	91
42001300	PROTECTIVE COAT	SQ YD	1230
42300400	PORTLAND CEMENT CONCRETE DRIVEWAY PAVEMENT, 8 INCH	SQ YD	54
42400200	PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH	SQ FT	4087
44000200	DRIVEWAY PAVEMENT REMOVAL	SQ YD	54
44000600	SIDEWALK REMOVAL	SQ FT	4087
44001700	COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT	FOOT	3273
67000400	ENGINEER'S FIELD OFFICE, TYPE A	CAL MO	4
67100100	MOBILIZATION	L SUM	1
70102620	TRAFFIC CONTROL AND PROTECTION, STANDARD 701501	L SUM	1
70102640	TRAFFIC CONTROL AND PROTECTION, STANDARD 701801	L SUM	1
X0322256	TEMPORARY INFORMATION SIGNING	SQ FT	308.4
44000190	HOT-MIX ASPHALT SURFACE REMOVAL, VARIABLE DEPTH	SQ YD	546
21101615	TOPSOIL FURNISH AND PLACE, 4"	SQ YD	179
25200110	SODDING, SALT TOLERANT	SQ YD	179

WHEREVER IN THE PLANS THE TERM "HMA SURF R&R FULL DEPTH" IS ENCOUNTERED IT SHALL BE INTERPRETED TO MEAN "HMA SURFACE REMOVAL VARIABLE DEPTH AND REPLACEMENT WITH HMA SURFACE COURSE, MIX D, N 50; DEPTH VARIES 1.5" TO 3"

ILLINOIS DEPARTMENT OF TRANSPORTATION

SUMMARY OF QUANTITIES

Rev. 6-1-10

Rev.

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NUMBER
VARIOUS	2010-027-I	COOK	19	14

CONTRACT: 60K63

LOCATION	COMB. CONC. C & G R&R (LF)	HMA SURF R&R FULL DEPTH (SQ YD)	SIDEWALK 5" R&R (SQ FT) 18" CARRIAGE	SIDEWALK 5" R&R (SQ FT) 5' PARALLEL	DRIVEWAY 8" R&R (SQ FT)	SALT TOLERANT SODDING (SQ YD)	REMARKS
3807 W. 58th St	14.0	2.3	0.0	0.0	21.0	0.0	Depressed Curb
4050 W. 58th St	5.0	0.8	7.5	0.0	0.0	0.0	
4016 W. 58th St	5.0	0.8	0.0	0.0	0.0	0.8	at alley
4151 W. 58th St	5.0	0.8	0.0	0.0	0.0	0.8	Adjacent to Type 1 Structure
4152 W. 58th St	5.0	0.8	0.0	0.0	0.0	0.8	Adjacent to Type 1 Structure
4147 W. 58th St	50.0	8.3	75.0	0.0	0.0	0.0	
4143 W. 58th St	50.0	8.3	75.0	0.0	0.0	0.0	
4141 W 58th St	50.0	8.3	75.0	0.0	0.0	0.0	
4067 W. 58th St	5.0	0.8	0.0	0.0	0.0	0.8	
4058 W. 58th St	5.0	0.8	0.0	0.0	0.0	0.8	
4049 W. 58th St	5.0	0.8	7.5	0.0	0.0	0.0	
4015 W. 58th St	5.0	0.8	7.5	0.0	0.0	0.0	
4100 W. 59th St	15.0	2.5	0.0	0.0	22.5	0.0	Side by alley
4130 W. 59th St	5.0	0.8	0.0	0.0	0.0	0.8	
4058 W. 59th St	28.0	4.7	42.0	0.0	0.0	0.0	Front & Side
4028 W. 59th St	5.0	0.8	7.5	0.0	0.0	0.0	
3647 W. 59th Place	6.0	1.0	9.0	0.0	0.0	0.0	
3801 W. 66th Place	5.0	0.8	0.0	0.0	0.0	0.8	Side of house
3820 W. 66th Place	5.0	0.8	7.5	0.0	0.0	0.0	
3823 W. 66th Place	5.0	0.8	7.5	0.0	0.0	0.0	
3829 W. 66th Place	10.0	1.7	15.0	0.0	0.0	0.0	Adjacent to Type 1 Structure
3839 W 66th Place	10.0	1.7	6.0	0.0	0.0	1.0	
3844 W. 66th Place	5.0	0.8	4.5	0.0	0.0	0.3	
3800 W. 66th St	5.0	0.8	7.5	0.0	0.0	0.0	Side of house
3844 W. 66th St	5.0	0.8	0.0	0.0	0.0	0.8	Adjacent to Type 1 Structure
3900 W. 69th St	25.0	4.2	0.0	0.0	37.5	0.0	
SUB-TOTAL	338.0	56.3	354.0	0.0	810	8.0	

TOTAL FOR PROJECT	3273.0	545.3	2391.8	1695.0	483.0	179.3
--------------------------	---------------	--------------	---------------	---------------	--------------	--------------


ILLINOIS DEPARTMENT OF TRANSPORTATION

SCHEDULE OF QUANTITIES

REV 5/26/10 RB

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NUMBER
VARIOUS	2010-027-1	COOK	19	15

CONTRACT NO.: 60K63

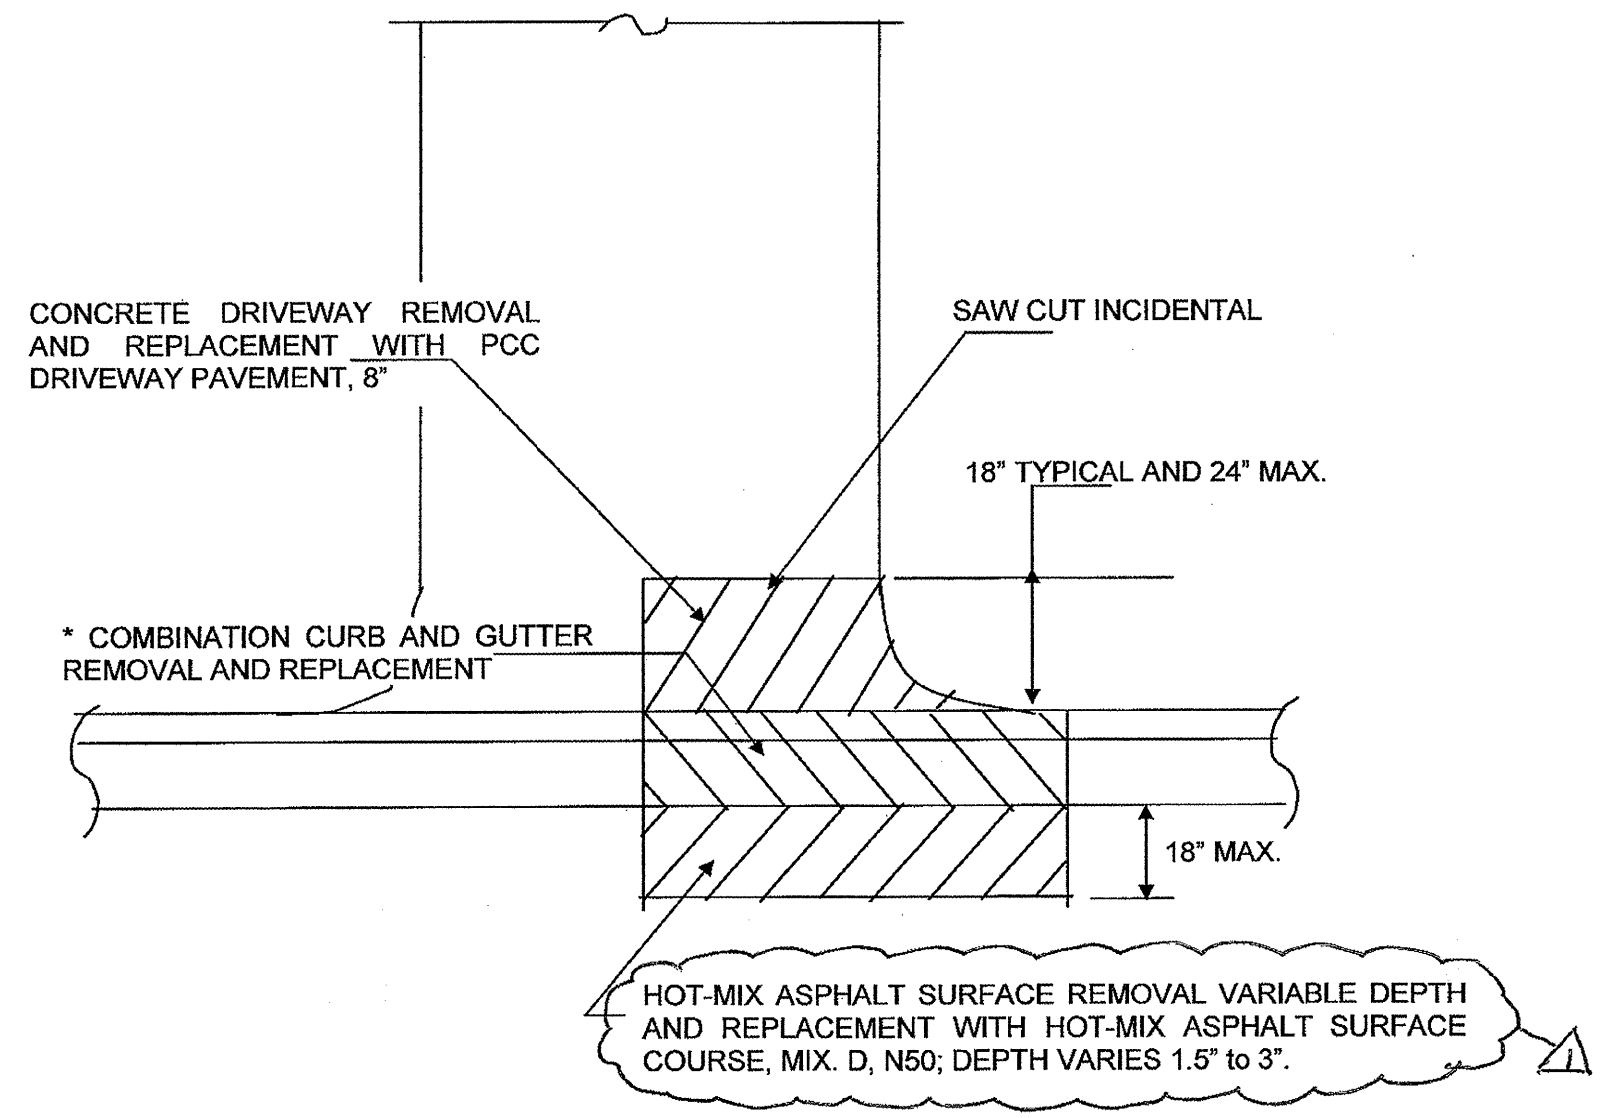

PLAN VIEW

* PROPOSED DEPRESSED CURB AND EXACT LENGTH SHALL BE DETERMINED IN THE FIELD BY THE ENGINEER (TYPICAL)

ILLINOIS DEPARTMENT OF TRANSPORTATION
DETAIL: CONCRETE DRIVEWAY

△ REV 5/26/10 RB