



# DRAIN FOR AGGREGATE BASE COURSE DETAIL

SHOULDER LOCATIONS WITH DRAINS FOR AGG BASE COURSE

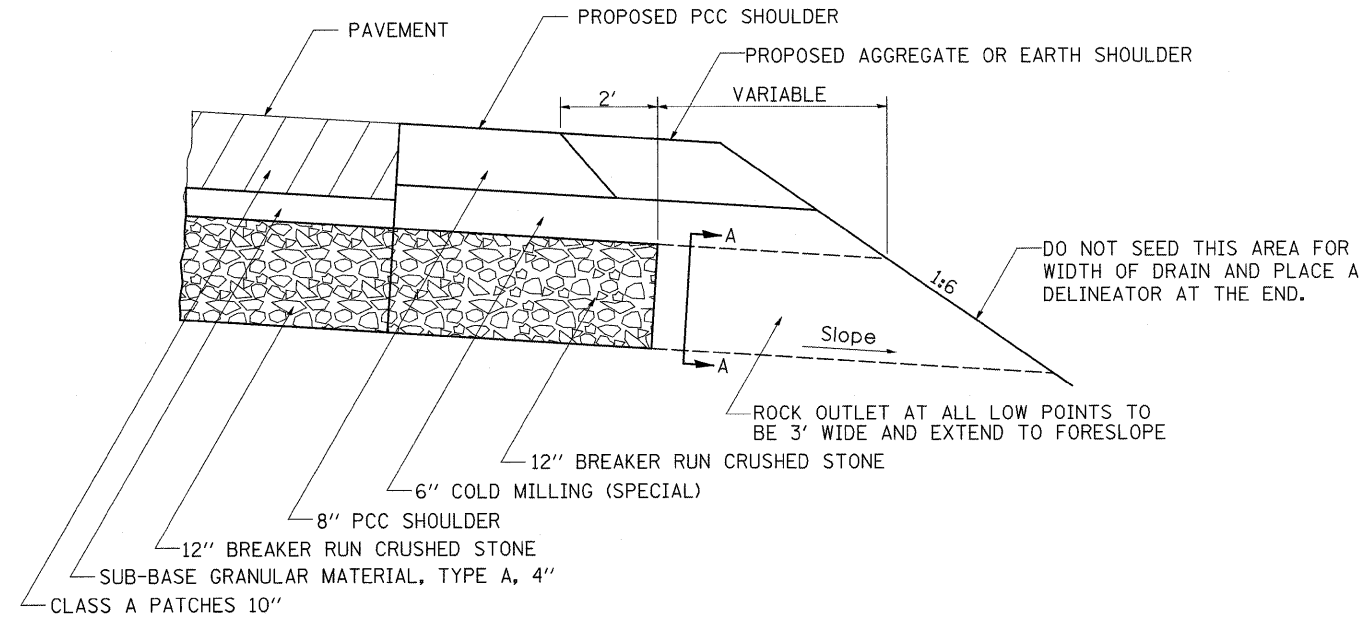


CLASS A PATCHES WITH DRAINS FOR AGG BASE COURSE

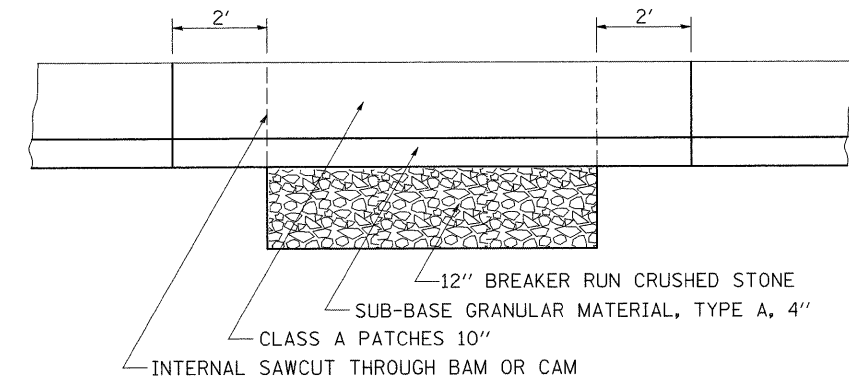

**NOTES:**

The rock outlets shall be constructed using CA7 and will be paid for at the contract unit price per SQ YD for DRAIN FOR AGGREGATE BASE COURSE. The thickness shall be the same as the adjacent sub-base material as noted on the plans and shall include the cost of the filter fabric. The Rock outlets will be measured in SQ YD, the width being 3' by the length shown above. The cost of the CA6 or CA10 under the shoulder shall be included in the contract unit price per SQ YD for SUB-BASE GRANULAR MATERIAL, TYPE A of the thickness specified. The filter fabric to be used shall conform to the filter fabric used for Riprap. The cost of furnishing and installing a delineator at the end of each drain shall be included in the cost for DRAIN FOR AGGREGATE BASE COURSE.



SECTION A-A

NOTE: Slope same as shoulder with 2% min.

FILE NAME =	USER NAME = dossed	DESIGNED -	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>I-39 DRAIN FOR AGGREGATE BASE COURSE DETAIL</b>	F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
cr:\pwork\PIWIDOT\DOSSDD\0149531\0205529-shd-details.dgn	PLOT SCALE = 50.0000' / IN.	DRAWN -	REVISED -			39	(103-1, 103-2)RS	LEE	313	247	
PLOT DATE = Fri Mar 26 07:29:55 2010	DATE -	CHECKED -	REVISED -			CONTRACT NO. 64E97		ILLINOIS FED. AID PROJECT			
		DATE -	REVISED -			SCALE:	SHEET NO.	OF	SHEETS	STA.	TO STA.