

NOTES

Detail I - With Bar Splicer or Couplers: Connect one (1) I'' x 7' 'x ' W_{-}'' steel R to the top layer of couplers with $2^{-5}8'' \phi$ bolts screwed to coupler at approximate & of each barrier panel.


Detail II - With Extended Reinforcement Bars: Connect one (1) 1" x 7" x "W" steel P to the concrete slab or concrete wearing surface with $2^{-5}8'' \phi$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate © of each barrier panel.


Cost of anchorage is included with Temporary Concrete Barrier. The 1" x 7" x "W" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.

SECTIONS THRU SLAB OR DECK BEAM

*** Dimension shown is minimum required embedment into concrete. If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.

**** If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

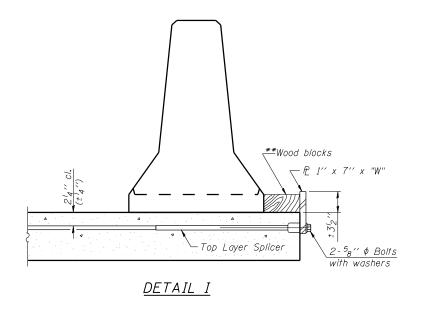

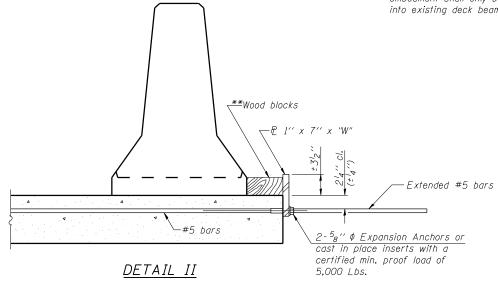

Top bars Detail I spacing Detail II - € 78" \$ Holes *@ 1" x 1'2" Notch

STEEL RETAINER P 1" x 7" x "W"

* Required only with Detail II

** Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

"W" = Top bars spacing + 4"

	, 1 10							
	USER NAME = has		DESIGNED	-	ELH	05/11	REVISED	-
	ESCA PROJECT NO. 933.14		CHECKED	-	RDP	04/13	REVISED	-
	PLOT SCALE = 0:2 ':' / IN.		DRAWN	-	DWH	05/11	REVISED	-
	PLOT DATE = 6/10/2014	8:47:32 AM	CHECKED	-	ELH	05/11	REVISED	-

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

TEMPORARY						R STAGE 3–0025	CONSTRUCTION
	SHEET	NO.	4	OF	31	SHEETS	

F.A.P. RTE.	SECTION		COUNTY	TOTAL SHEETS	SHEET NO.
332	(12,B2)B-1	WABASH	68	24	
		CONTRACT	NO. 7	4219	
	ILLINOIS	FED. A	ID PROJECT		

R-27

7-1-10