
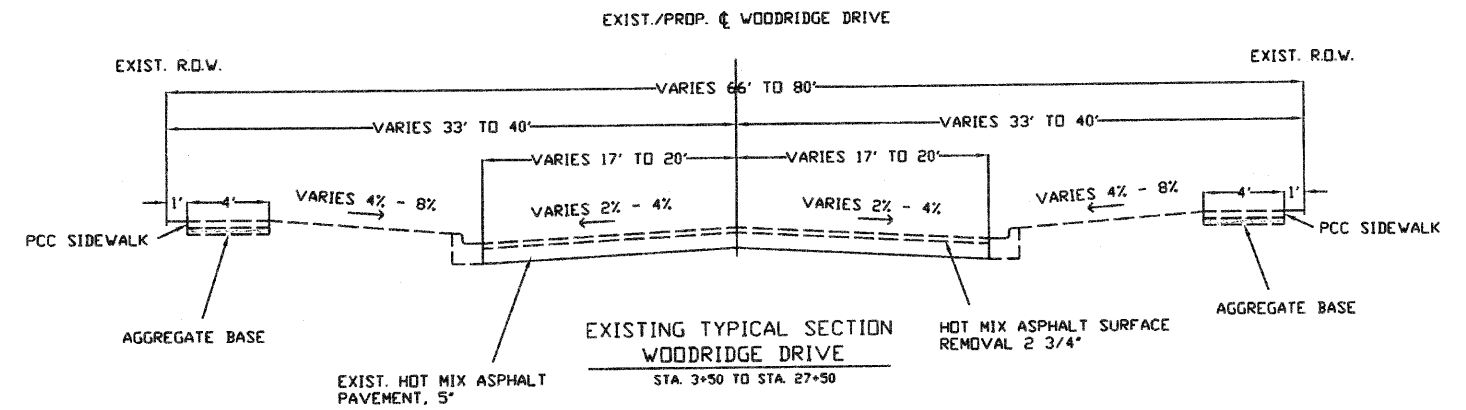


**CONTRACT NO. 63348**

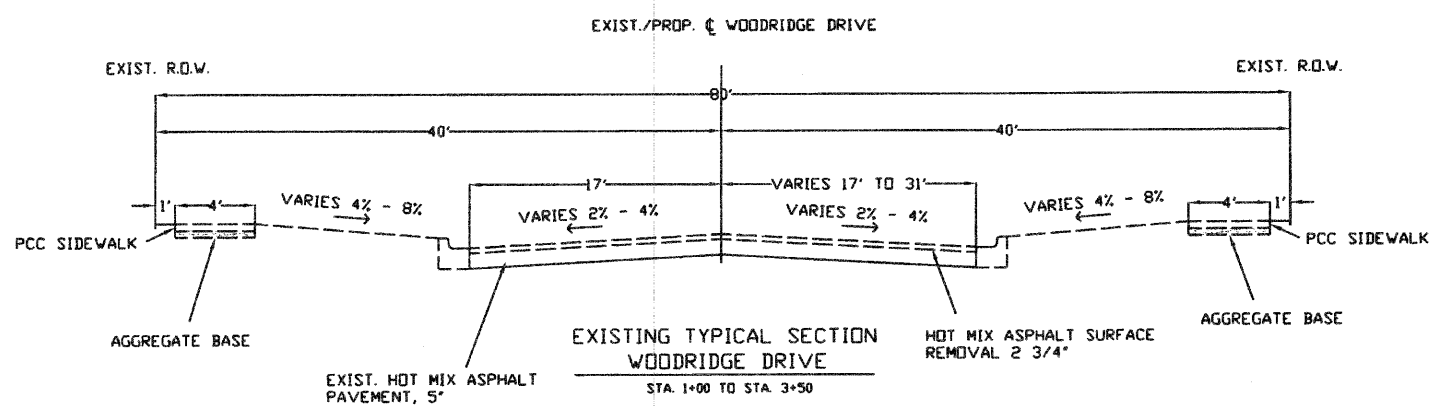

CONTRACTOR SHALL MILL BEFORE PATCHING


**HOT-MIX ASPHALT MIXTURE REQUIREMENTS:**

MIXTURE TYPE	AIR VOIDS @Ndes
<b>STREETS</b>	
HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N50 (IL 9.5mm) 1 3/4"	4% @ 50 Gyr.
POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50 1"	4% @ 50 Gyr.
PATCHING CLASS D PATCHES (HMA BINDER IL-19mm) 5"	4% @ 70 Gyr.
<b>DRIVEWAYS</b>	
HOT-MIX ASPHALT BASE COURSE (HMA BINDER IL-19mm) 2 1/4"	4% @ 50 Gyr.
HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50 (IL 9.5mm) 2"	4% @ 50 Gyr.

THE UNIT WEIGHT USED TO CALCULATE ALL HMA SURFACE MIXTURE QUANTITIES IS 112 LBS/SQ YD/IN.

THE "AC TYPE" FOR POLYMERIZED HMA MIXES SHALL BE "SBS/SBR PG 70 -22" AND FOR NON-POLYMERIZED HMA THE "AC TYPE" SHALL BE "PG 64 -22" UNLESS MODIFIED BY DISTRICT ONE SPECIAL PROVISIONS.

FOR "PERCENT OF RAP" SEE DISTRICT ONE SPECIAL PROVISIONS.

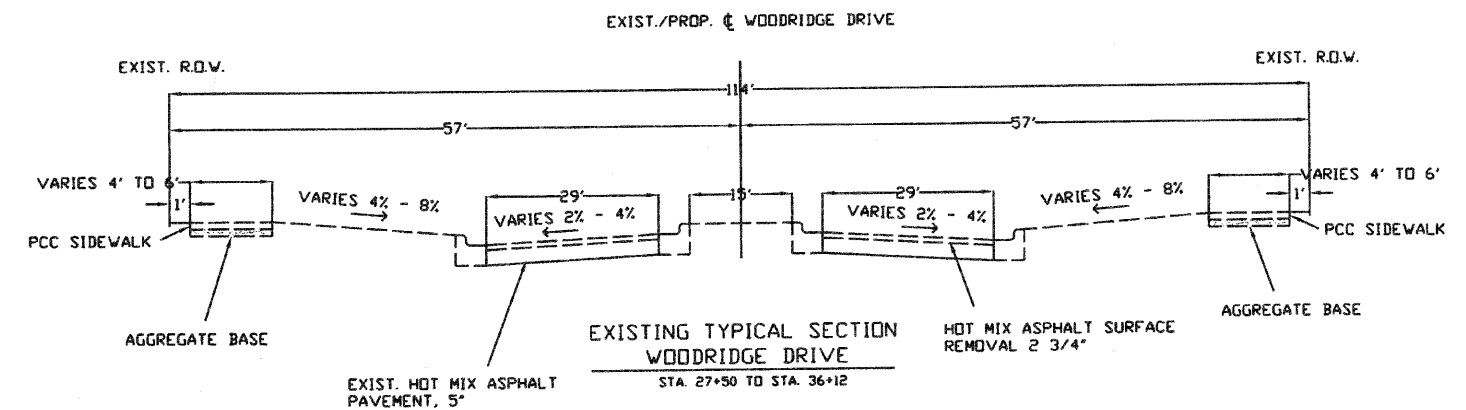

**CROSS SECTIONS ARE NOT TO SCALE**

**VILLAGE OF WOODRIDGE PUBLIC WORKS**  
 1 Plaza Drive, Woodridge IL 60517 (630) 719-4753

**WOODRIDGE DRIVE  
 REHABILITATION PROJECT**

**EXISTING TYPICAL CROSS SECTIONS**

DRAWN BY: AF

CHECKED BY: SM