
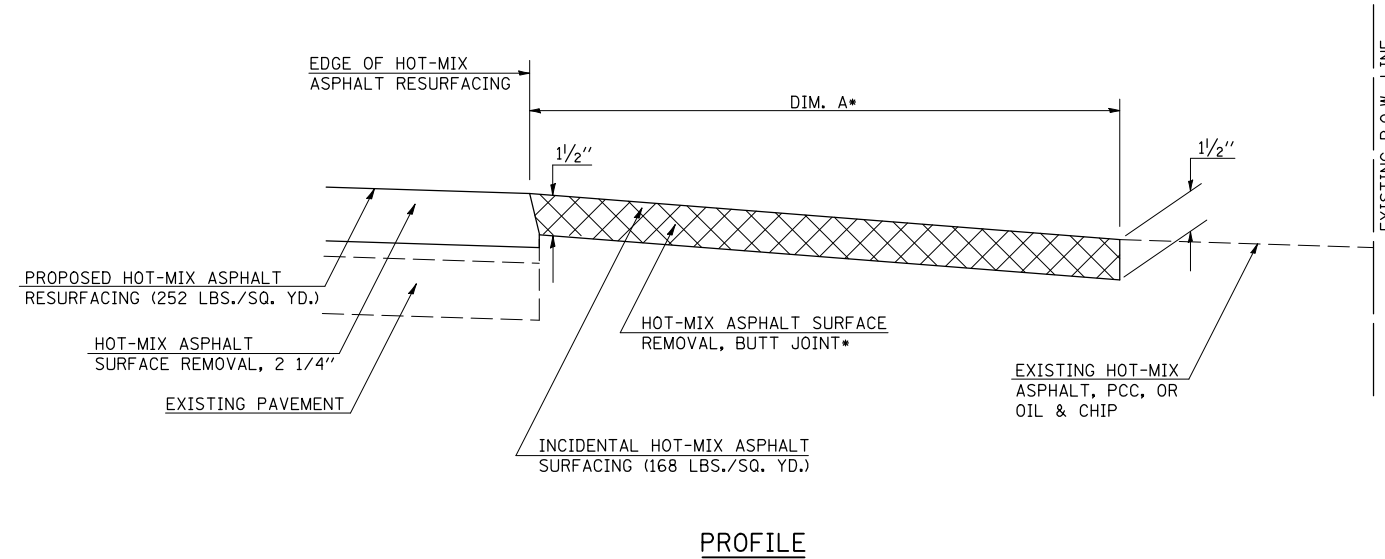


TYPICAL DETAIL OF SIDEROAD RETURNS

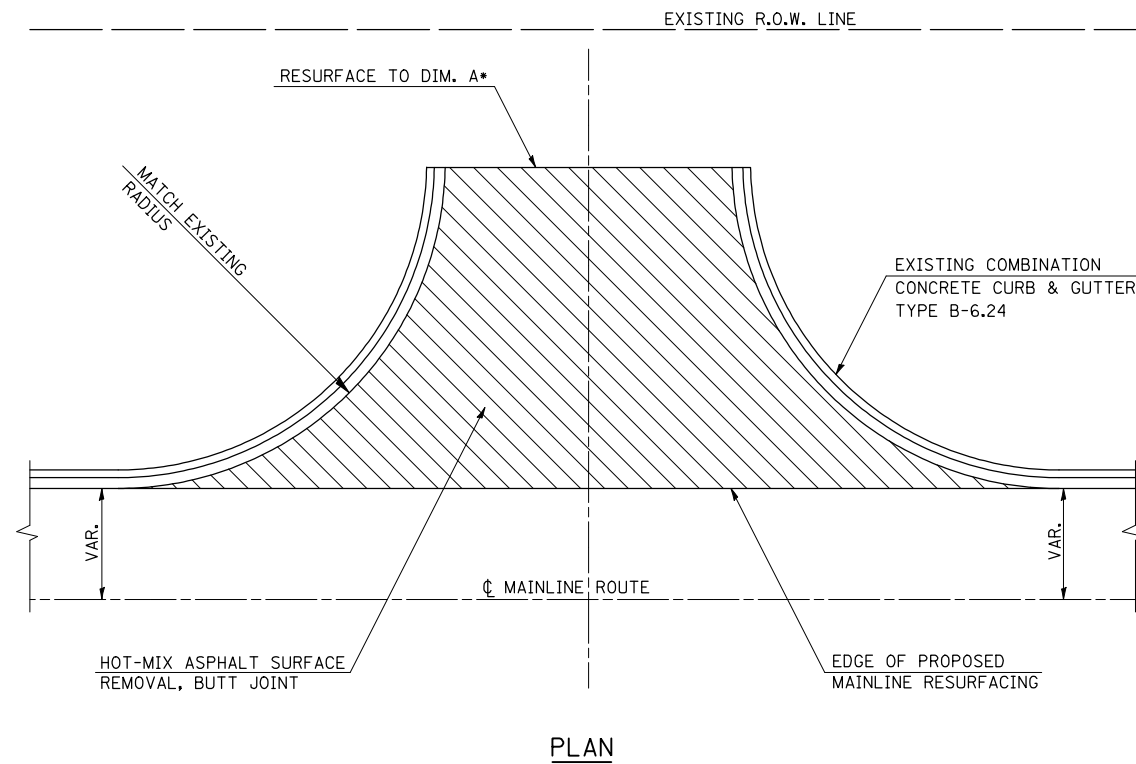

GENERAL NOTES

1. THE EXISTING SURFACE SHALL BE PREPARED IN ACCORDANCE WITH SECTION 408 OF THE STANDARD SPECIFICATIONS.
2. THE INCIDENTAL HOT-MIX ASPHALT SURFACING IS INTENDED TO RESURFACE THE EXISTING SIDEROADS IN THEIR ENTIRETY. THE EXISTING SIDEROADS SHOULD BE RESURFACED TO MAINTAIN THEIR CURRENT RADII AND SHALL BE RESURFACED TO THE DIM. A SHOWN ON THE CHART ON THE RIGHT SIDE OF THIS PAGE.

*SEE CHART ON RIGHT SIDE OF PAGE FOR A LIST OF SIDEROADS COVERED BY THIS DETAIL AND DIMENSIONS.

SIDEROAD NAME	STATION	LT OR RT	DIM. A*
CLINGAN LANE	2745+55.55	LT	44.0 FEET
CLINGAN LANE	2745+55.55	RT	30.0 FEET
MAIN STREET	2825+80.11	RT	80.0 FEET
LYONS ROAD	2908+63.61	RT	135.0 FEET
CATLIN ROAD	2908+71.00	LT	105.0 FEET

FILE NAME =	USER NAME = hoganbj	DESIGNED - BJH	REVISED -
ct:\pw\work\PWIDOT\HOGANBJ\d0185087\0570709-sht-details.dgn		DRAWN - 9/29/2009	REVISED -
	PLOT SCALE = 40.0000' / IN.	CHECKED -	REVISED -
	PLOT DATE = 3/15/2010	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIDEROAD RESURFACING DETAIL

SCALE: SHEET NO. 1 OF 1 SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
332	47RS-11	VERMILION	56	49
CONTRACT NO. 70709				
ILLINOIS FED. AID PROJECT				