
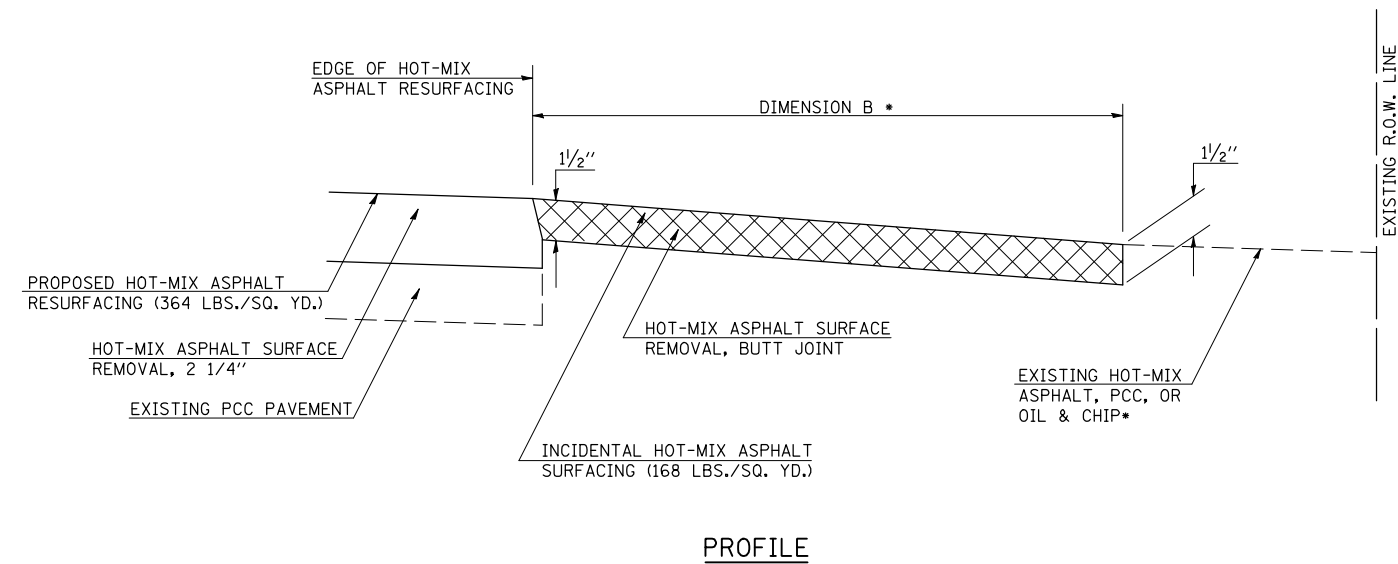


TYPICAL DETAIL OF SIDEROAD RETURNS

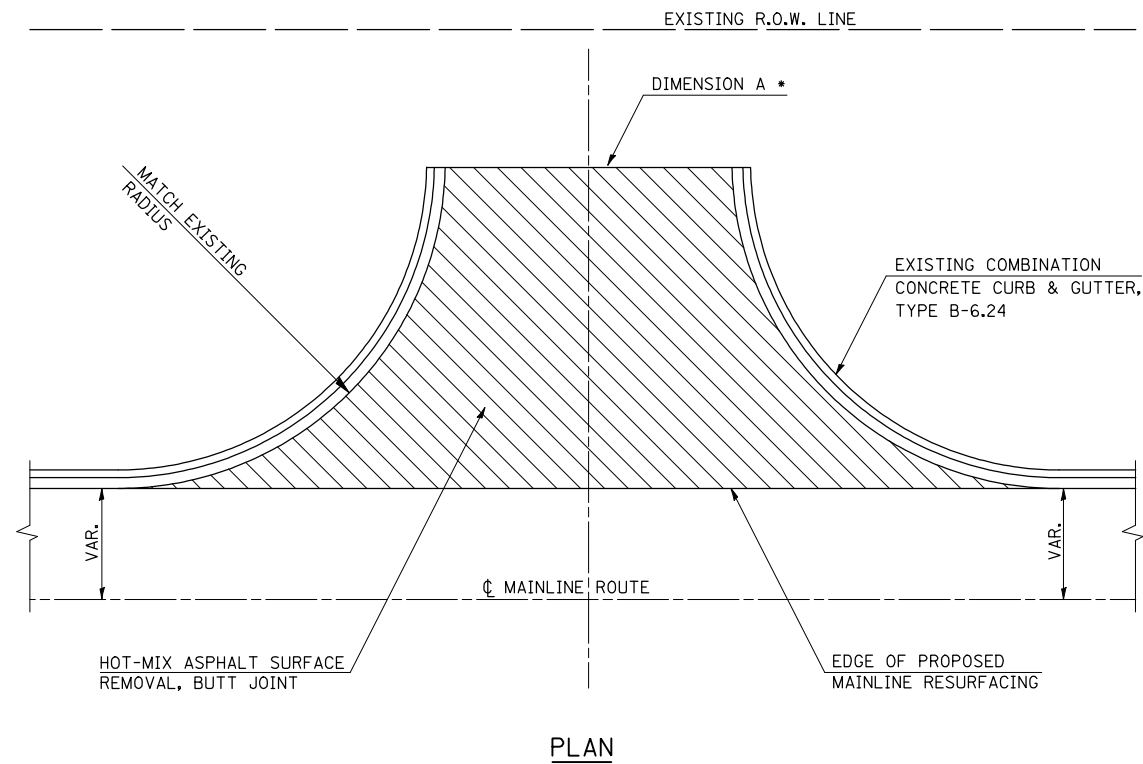

GENERAL NOTES

1. THE EXISTING SURFACE SHALL BE PREPARED IN ACCORDANCE WITH SECTION 408 OF THE STANDARD SPECIFICATIONS.
2. THE INCIDENTAL HOT-MIX ASPHALT SURFACING IS INTENDED TO RESURFACE THE EXISTING SIDEROADS IN THEIR ENTIRETY. THE EXISTING SIDEROADS SHOULD BE RESURFACED TO MAINTAIN THEIR CURRENT RADII.

* SIDEROAD DIMENSIONS

SIDEROAD NAME	STATION	LT OR RT	DIMA*	DIM B*
E 16TH ST	3029+26.55	RT	31.9'	10.0'
W 16TH ST	3029+28.95	LT	25.7'	29.9'
W 3RD ST	28+08.08	LT	27.2'	35.0'
E 3RD ST	28+08.89	RT	31.9'	35.0'
W 2ND ST	1031+91.45	LT	26.4'	35.0'
E 2ND ST	1031+89.14	RT	28.0'	35.0'
W 1ST ST	1035+71.27	LT	26.0'	35.0'
E 1ST ST	1035+70.25	RT	26.0'	35.0'
W BRIDGE ST	1039+86.84	LT	26.0'	35.0'
E BRIDGE ST	1039+06.67	RT	26.0'	35.0'
W BLUFF ST	1048+61.69	LT	29.0'	40.0'
E BLUFF ST	1048+61.69	RT	26.0'	40.0'

FILE NAME =	USER NAME = bucklesjj	DESIGNED - BJH	REVISED -
ct:\pw\work\PWIDOT\BUCKLESJJ\d0184908\070784-sht-Details.dgn		DRAWN - 9/29/2009	REVISED -
	PLOT SCALE = 40.0000' / IN.	CHECKED -	REVISED -
	PLOT DATE = 3/15/2010	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIDEROAD RESURFACING DETAILS

SCALE: SHEET NO. OF SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
332	47RS-5	VERMILION	41	33
CONTRACT NO. 70784				
ILLINOIS FED. AID PROJECT				