



**WASHINGTON STREET
EAST SIDE
STA 427+95 TO 429+72.5**

- (A) WIDENING VARIES 6.0' TO 11.0' FROM STA. 429+72.5 TO STA. 431+60 (SEE ALTERNATE EAST SIDE TREATMENT DETAIL FOR STA. 427+95 TO STA. 429+72.5)
- (B) VARIES 0' TO 11.4' FROM STA. 427+95 TO STA. 431+60 AS A FLUSH PAINTED MEDIAN.
- (C) PAVEMENT WIDENING AND CONCRETE COMBINATION CURB AND GUTTER REPLACEMENT FROM STA. 427+95 TO 431+60
- (D) ALTERNATE WEST SIDE TREATMENT STA. 431+79.1 TO 432+74.32 SEE PROPOSED TAMARACK TYPICAL SHEET 9 OF 10

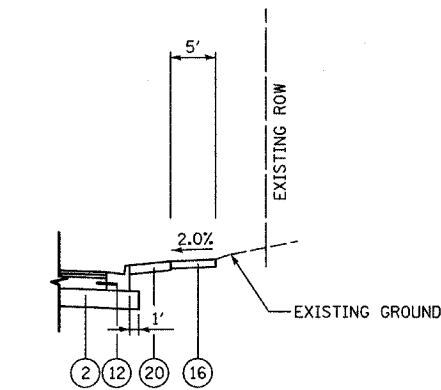


**WASHINGTON STREET
WEST SIDE
STA 427+95 TO 429+72.5**

- (A) FLUSH PAINTED MEDIAN VARIES 11.4' TO 12' FROM STA. 431+60 TO 431+77.9 VARIES 12' TO 0' FROM STA. 431+77.9 TO 432+09.5 (SEE ALTERNATE DETAIL ABOVE)
- LT. TURN LANE: 12' FROM STA 432+65.3 TO STA 434+30.1, VARIES 12' TO 0' FROM STA 434+30.1 TO STA 435+54.
- RAISED MEDIAN VARIES 0' TO 18' FROM STA. 434+39.5 TO STA. 437+39.2.

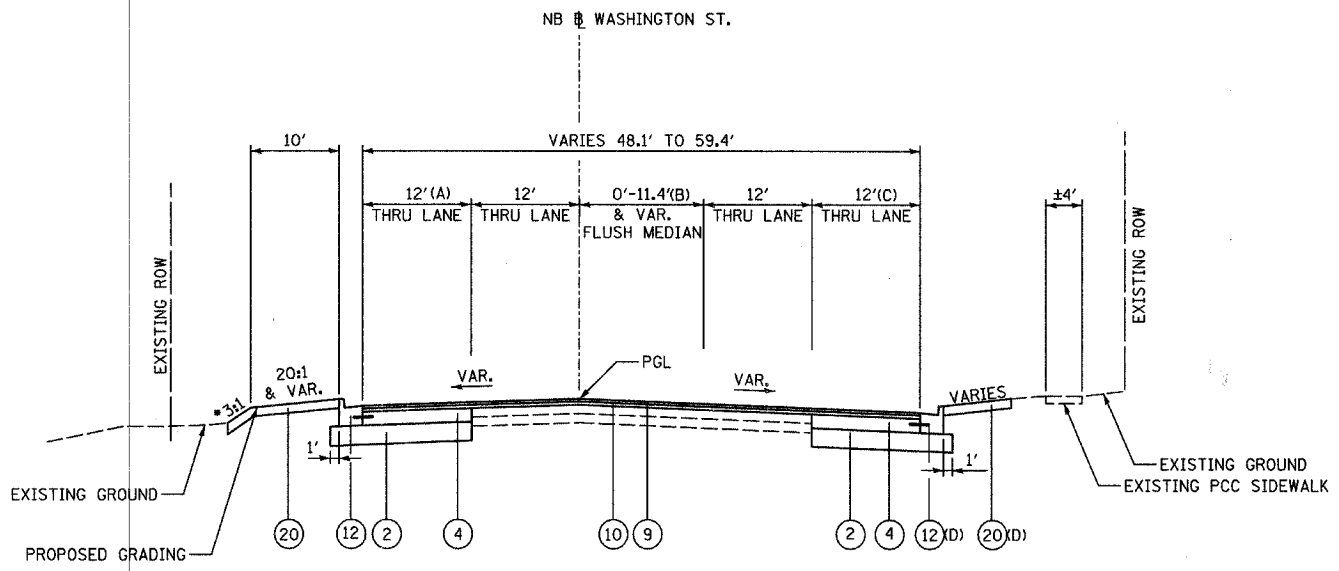

**WASHINGTON STREET - WIDENING
STA 427+95.0 TO STA 431+60.0
(STA 426+04.58 TO STA 427+95 WILL ONLY
BE RE-STRIPED - REFER TO EXISTING TYPICAL)**

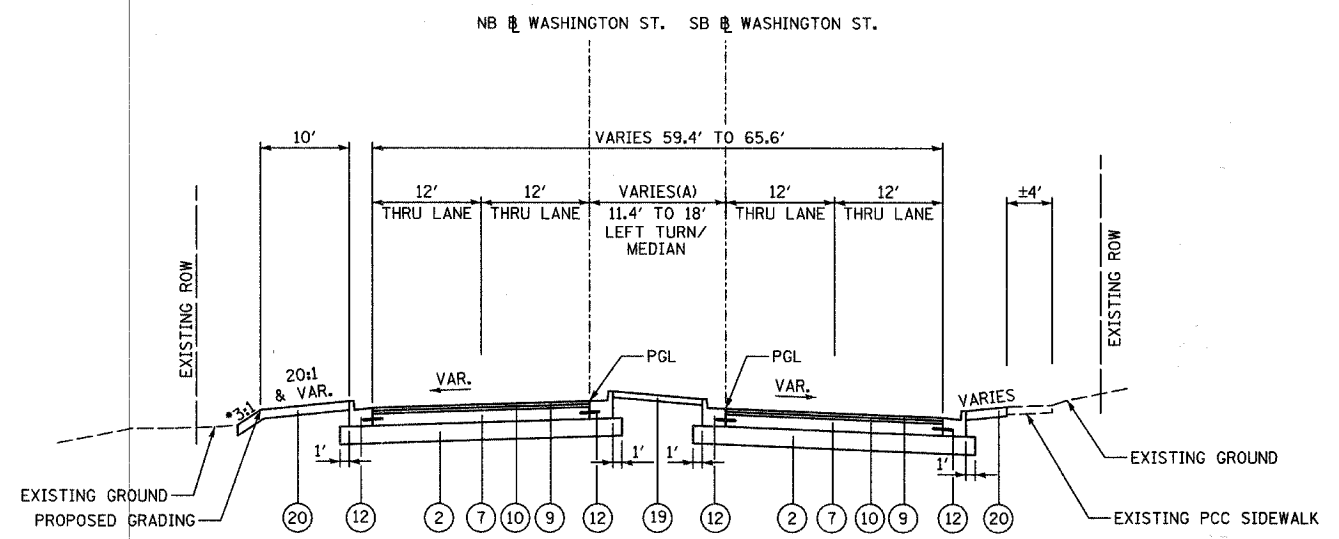

**WASHINGTON STREET
STA 431+60.0 TO STA 437+39.5**

NOTE:
SEE ALSO PROPOSED TYPICAL TAMARACK AVE FOR RIGHT SIDE TREATMENT STA 431+72.7 TO STA 432+81.2

LEGEND:


- 1 GEOTECHNICAL FABRIC FOR GROUND STABILIZATION
- 2 AGGREGATE SUBGRADE 12"
- 3 SUBBASE GRANULAR MATERIAL, TYPE B 9"
- 4 PORTLAND CEMENT CONCRETE BASE COURSE 10"
- 5 HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50 1 1/2"
- 6 LEVELING BINDER (MACHINE METHOD), N50 1 1/2"
- 7 PORTLAND CEMENT CONCRETE BASE COURSE 8 1/2"
- 8 AGGREGATE BICYCLE PATH
- 9 POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90 1 3/4"
- 10 POLYMERIZED HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N90 2 1/4"
- 11 COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12
- 12 COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24
- 13 COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24 (SPECIAL)
- 14 COMBINATION CONCRETE CURB AND GUTTER, TYPE M-4.24 (VARIABLE WIDTH GUTTER FLAG)
- 15 CONCRETE MEDIAN SURFACE, 4"
- 16 PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH
- 17 HOT-MIX ASPHALT SHOULDERS, 6"
- 18 STEEL PLATE BEAM GUARDRAIL, TYPE A OR B (SEE PROPOSED PLANS)
- 19 LANDSCAPED MEDIAN (SEE LANDSCAPING PLANS)
- 20 LANDSCAPED AREA (SEE LANDSCAPING PLANS)
- 21 RETAINING WALL (SEE STRUCTURAL PLANS)
- 22 COMBINATION CONCRETE CURB AND GUTTER, TYPE M-2.24
- 23 CONCRETE MEDIAN
- 24 PIPE UNDERDRAINS 6"

SEE SUPERELEVATION TABLE ON PROPOSED TYPICAL SECTIONS SHEET 11 OF 11 FOR CROSS SLOPE INFORMATION.

REVISIONS	
NAME	DATE

INTERSECTION IMPROVEMENT
WASHINGTON STREET - 75th STREET
PROPOSED TYPICAL SECTIONS
WASHINGTON STREET
SHEET 2 OF 11

CONSULTANT
TYLIN INTERNATIONAL

City of  **Naperville**

DRAWN:	SHEET NO.
CHECKED:	
APPROVED:	
DATE: APRIL 11, 2008	
SCALE: NONE	
JOB NO.: P-91-494-00	PROJECT NO.: M-CMM-7003 (985)

4/11/2008 10:25:50 AM