


F.A. RTE. 326	SECTION 111CSWARS-2.1	COUNTY GRUNDY	TOTAL SHEETS 85	SHEET NO. 24
STA. 19+50	TO STA. 25+50			
FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT				

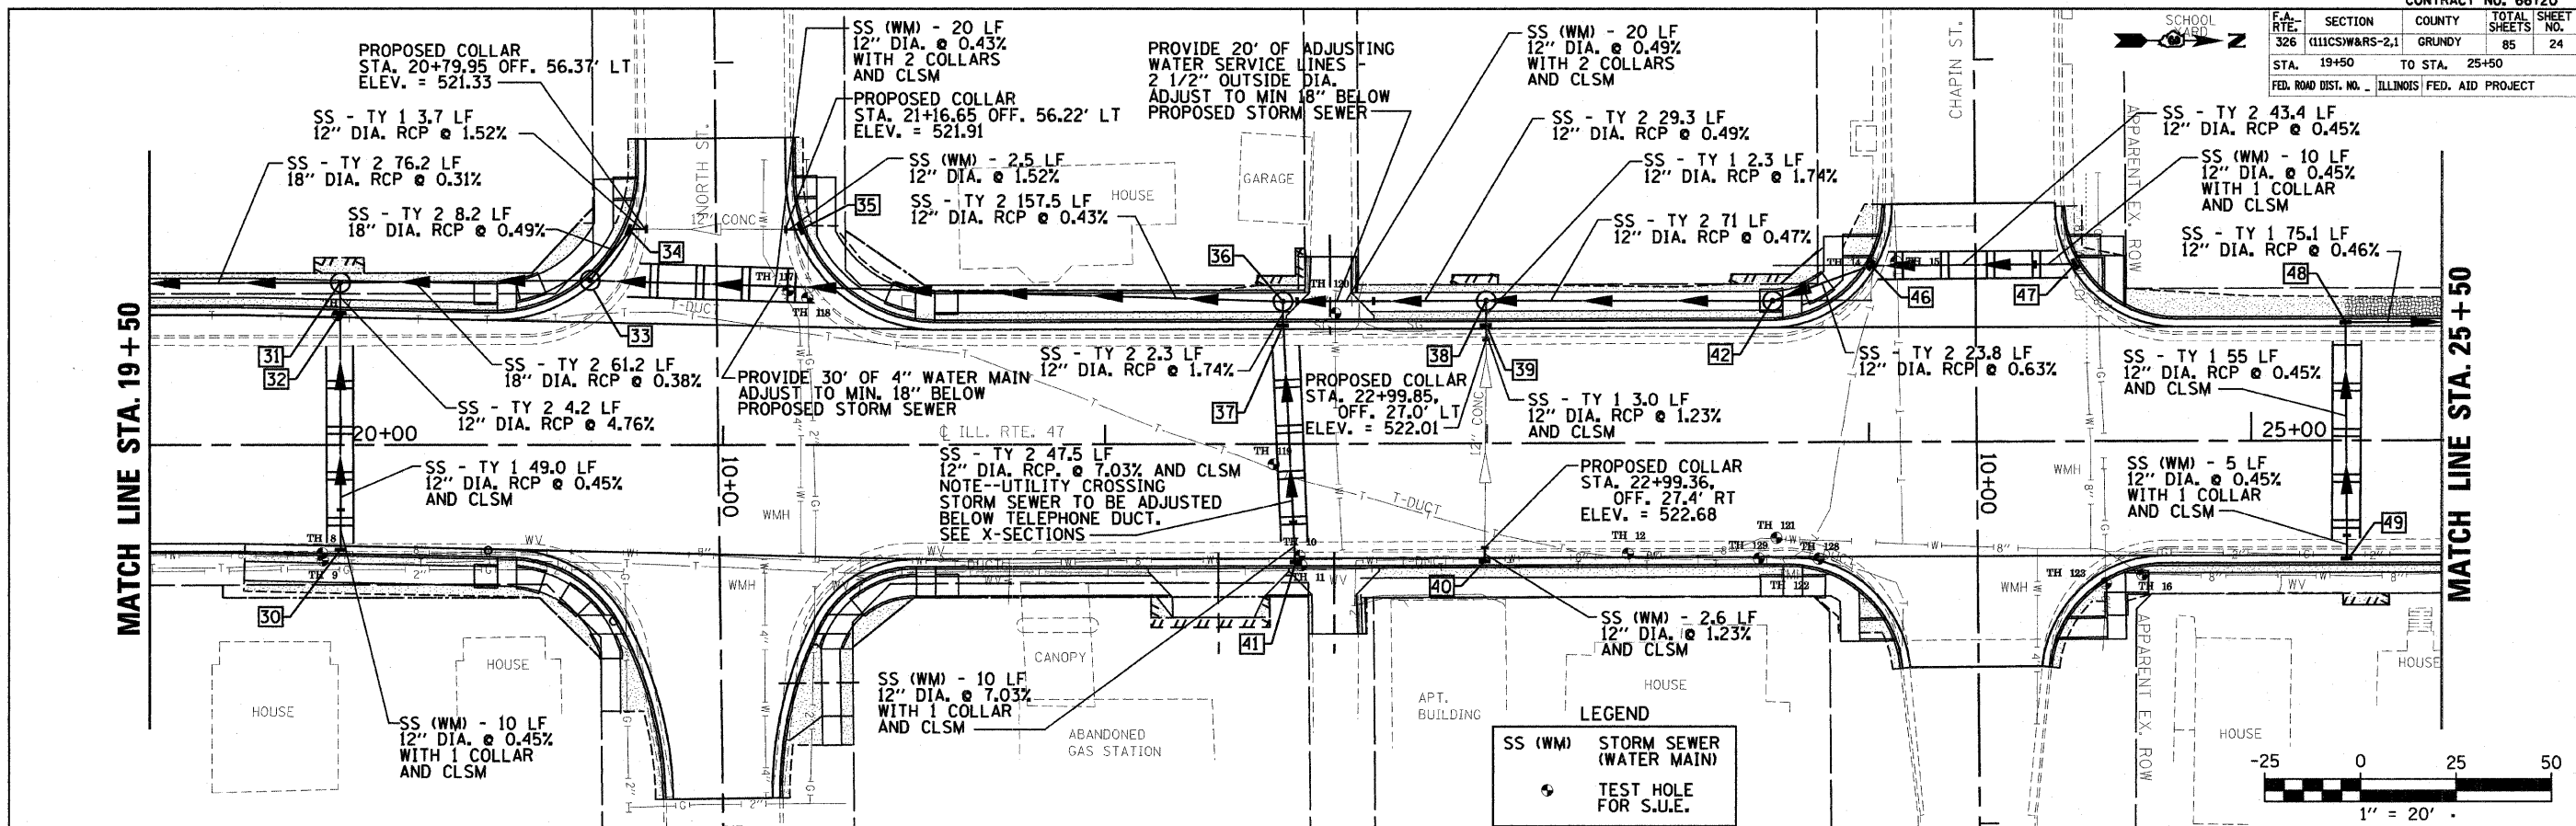

STRUCT. NUMBER	STATION	OFFSET	RIM ELEV.	INVERT ELEV.	STRUCTURE TYPE	STRUCT. NUMBER	STATION	OFFSET	RIM ELEV.	INVERT ELEV.	STRUCTURE TYPE	
545	30	20+00.0	26.5' RT.	525.90	523.37 W	41	22+50.0	30.0' RT.	525.73	523.48 W	INLET TYPE A W/ TYPE 3 FRAME & GRATE	545
	31	20+00.0	42.6' LT.	526.41	518.18 N; 518.18 S; 522.80 E	42	23+75.0	37.0' LT.	526.09	520.81 N; 520.57 S	MANHOLE TYPE A 4' DIA. W/ TYPE 1 FRAME CL	
	32	20+00.0	33.4' LT.	525.90	523.00 W; 523.10 E	43						
540	33	20+65.2	43.1' LT.	525.50	518.54 N; 518.41 S; 520.29 W	44						540
	34	20+75.4	55.1' LT.	525.19	521.27 N; 520.33 E	45						
	35	21+20.0	56.2' LT.	525.08	521.95 S	46	24+00.7	46.1' LT.	525.58	520.96 N; 520.96 S	INLET TYPE B W/ TYPE 3 FRAME & GRATE	
	36	22+46.7	37.3' LT.	525.94	520.00 N; 519.30 S; 519.30 E	47	24+54.1	46.4' LT.	525.68	521.20 S	INLET TYPE A W/ TYPE 3 FRAME & GRATE	
535	37	22+46.7	30.0' LT.	525.74	519.34 W; 519.44 E	48	25+25.0	30.0' LT.	525.93	522.17 N; 522.25 E	INLET TYPE B W/ TYPE 3 FRAME & GRATE	535
	38	23+00.0	37.3' LT.	526.18	520.24 N; 520.24 S; 520.70 E	49	25+25.0	30.0' RT.	525.93	522.52 W	INLET TYPE A W/ TYPE 3 FRAME & GRATE	
	39	23+00.0	30.0' LT.	525.68	521.97 E; 520.74 W	50						
	40	23+00.0	30.0' RT.	525.68	522.71 W							

STRUCT. NUMBER	STATION	OFFSET	RIM ELEV.	INVERT ELEV.	STRUCTURE TYPE
530	30	20+00.0	26.5' RT.	525.90	523.37 W
525	31	20+00.0	42.6' LT.	526.41	518.18 N; 518.18 S; 522.80 E
520	32	20+00.0	33.4' LT.	525.90	523.00 W; 523.10 E
515	33	20+65.2	43.1' LT.	525.50	518.54 N; 518.41 S; 520.29 W
510	34	20+75.4	55.1' LT.	525.19	521.27 N; 520.33 E
505	35	21+20.0	56.2' LT.	525.08	521.95 S
	36	22+46.7	37.3' LT.	525.94	520.00 N; 519.30 S; 519.30 E
	37	22+46.7	30.0' LT.	525.74	519.34 W; 519.44 E
	38	23+00.0	37.3' LT.	526.18	520.24 N; 520.24 S; 520.70 E
	39	23+00.0	30.0' LT.	525.68	521.97 E; 520.74 W
	40	23+00.0	30.0' RT.	525.68	522.71 W
	41	22+50.0	30.0' RT.	525.73	523.48 W
	42	23+75.0	37.0' LT.	526.09	520.81 N; 520.57 S
	43				
	44				
	45				
	46	24+00.7	46.1' LT.	525.58	520.96 N; 520.96 S
	47	24+54.1	46.4' LT.	525.68	521.20 S
	48	25+25.0	30.0' LT.	525.93	522.17 N; 522.25 E
	49	25+25.0	30.0' RT.	525.93	522.52 W
	50				