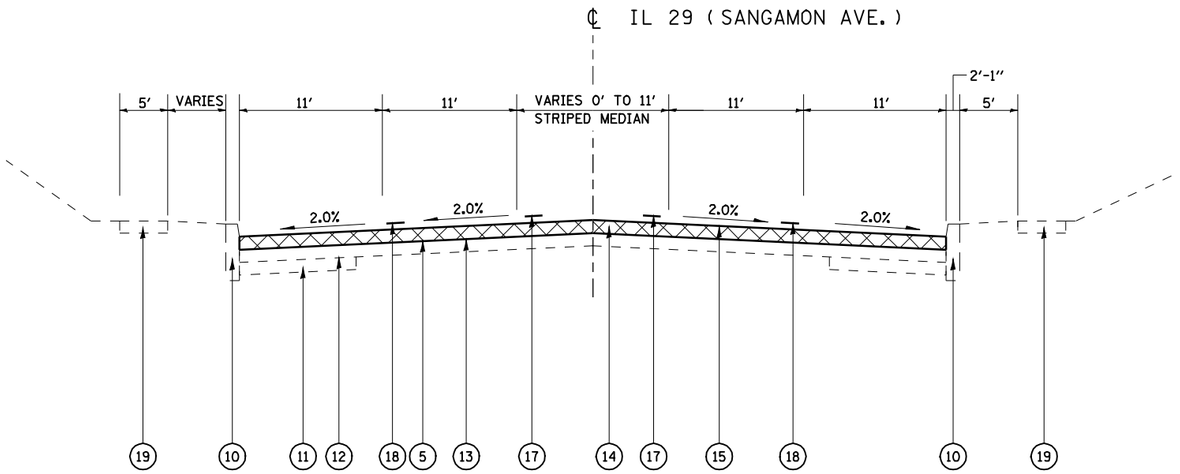

TYPICAL SECTION #3

STA. 8+20 TO STA. 9+06

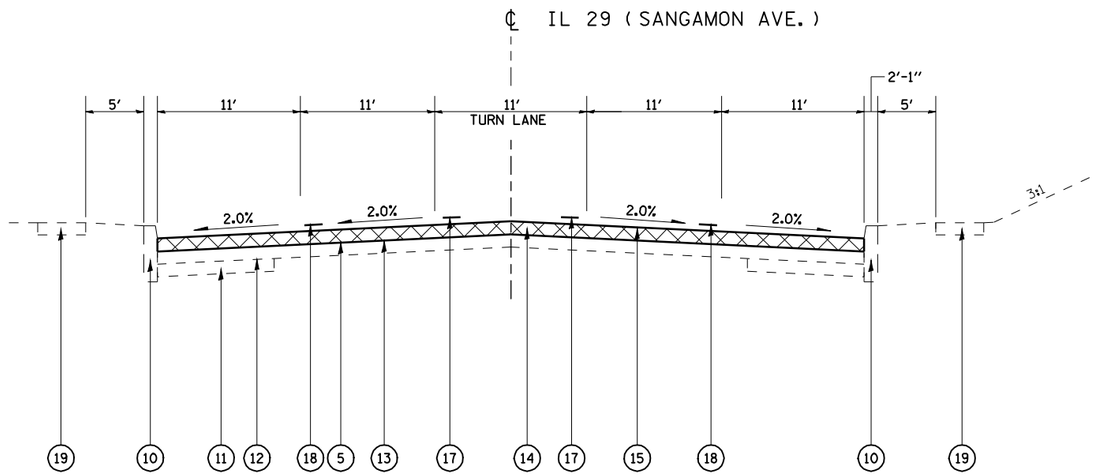

TYPICAL SECTION #4

STA 9+06 TO STA 11+47.82

LEGEND

1. EX HOT-MIX ASPHALT SHOULDERS
2. EX PIPE UNDERDRAIN
3. EX STABILIZED SUBBASE 4"
4. EX PCC PAVEMENT 9"-6"-9"
5. EX HOT-MIX ASPHALT SURFACE
6. EX CONCRETE CURB & GUTTER B 9.24
7. EX CONCRETE CURB & GUTTER B 6.24
7A. EX CONCRETE CURB & GUTTER M6.06
8. EX PCC PAVEMENT 8"
9. EX PCC BASE COURSE 9"
10. EX COMBINATION CURB & GUTTER TYPE B 6.18
11. EX SUBBASE GRANULAR MATERIAL, TYPE B 12" & VAR.
12. EX HOT-MIX ASPHALT CONCRETE BASE COURSE 10"
13. EX HOT-MIX ASPHALT CONCRETE SURFACE COURSE, MIX E, CLASS 1, TYPE 2
14. PR HOT-MIX ASPHALT SURFACE REMOVAL (2")
15. PR HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70 (2")
16. PR HOT-MIX ASPHALT SHOULDERS, 8"
17. PR THERMOPLASTIC PAVEMENT MARKING, LINE 5"
18. PR PREFORMED PLASTIC PAVEMENT MARKING, LINE 5"
19. PCC SIDEWALK

FILE NAME = c:\pw_work\PWIDOT\LAUGHLINRL\dms25514\D672909-sht-typicals.dgn	USER NAME = laughlinrl	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TYPICAL SECTIONS F.A.P. 667 (SANGAMON AVE.)	F.A.P. RTE. 667	SECTION 79Z(RS-4)	COUNTY SANGAMON	TOTAL SHEETS 43	SHEET NO. 6
	PLOT SCALE = 100.0000 ' / IN.	DRAWN -	REVISED -					CONTRACT NO. 72909		
	PLOT DATE = Mar-25-2010 10:51:38AM	CHECKED -	REVISED -		SCALE: SHEET NO. OF SHEETS STA. TO STA.		ILLINOIS FED. AID PROJECT			
		DATE -	REVISED -							