
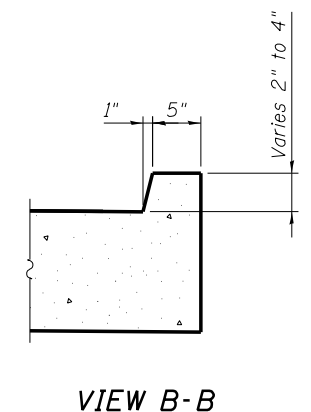


* Tilt #9 b5(E) bars as required to maintain clearance.

** Cost included with Concrete Superstructure.

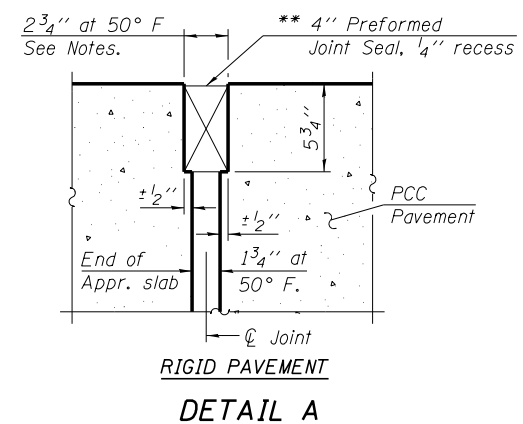

NOTES:

1. See sheet SA22 for Sections C-C & D-D and View E-E.
2. ax(E) bar spacings measured along ϕ Rdwy.
3. The joint opening shall be determined per Article 520.04 except that on jointless structures, the distance described as the bridge length between the nearest fixed bearings each way from the joint shall be taken as half the bridge length plus the approach slab length. The minimum dimension shall be 1 1/2" for installation purposes.

benesch
 engineers · scientists · planners

Alfred Benesch & Company
 205 North Michigan Avenue, Suite 2400
 Chicago, Illinois 60601
 312-565-0450 Job No. 10093

FILE NAME =	USER NAME = jsurber	DESIGNED - JOB	REVISED -
0161000.60J16.021.appslabdet-1.SB.dgn		CHECKED - RMM	REVISED -
	PLOT SCALE =	DRAWN - MAK	REVISED -
	PLOT DATE = 12/20/2012	CHECKED - RMM	REVISED -

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

**BRIDGE APPROACH SLAB DETAILS (1 OF 2)
 STRUCTURE NO. 016-1000/1001**

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
372	2013-038B-R	COOK	821	269
CONTRACT NO. 60J16				

SHEET NO. SA21 OF SA40 SHEETS

ILLINOIS FED. AID PROJECT

X:\1000005\100093\Eng_Docs_Phase_1\11\SN_016_1000_1001_1st_Ave_over_47th_St\Final\0161000_60J16_021.appslabdet-1.SB.dgn 9:40:52 AM 7/29/2014