

STANDARD BAR SPLICER ASSEMBLY

Minimum Lap Lengths								
Bar size to be spliced	Table 1	Table 2	Table 3	Table 4	Table 5	Table 6		
3, 4	1'-5''	1'-11''	2'-1''	2'-4''	2'-7''	2'-11''		
5	1'-9''	2'-5''	2'-7''	2'-11''	3'-3''	3'-8''		
6	2'-1''	2'-11''	3'-1''	3′-6′′	3′-10′′	4'-5''		
7	2'-9''	3′-10′′	4'-2''	4'-8''	5'-2''	5′-10′′		
8	3′-8′′	5′-1′′	5′-5′′	6'-2''	6′-9′′	7'-8''		
9	4'-7''	6′-5′′	6′-10′′	7'-9''	8'-7''	9'-8''		

Table 1: Black bar, 0.8 Class C


Table 2:Black bar, Top bar lap, 0.8 Class CTable 3:Epoxy bar, 0.8 Class CTable 4:Epoxy bar, Top bar lap, 0.8 Class CTable 5:Epoxy bar, Class C

Table 6: Epoxy bar, Top bar top, Class C

Threaded splicer bar length = min. lap length + $1_2^{\prime\prime}$ + thread length

* Epoxy not required on Bar Splicer Assembly components used in conjunction with black bars.


Location	Bar size	No. assemblies required	Table for minimum lap length
Deck Slab-Top	#6	129	4
Deck Slab-Bottom	#6	127	3
Pier Haunch	#6	4	3
Abut. Haunch	#6	6	3
Approach Slab	#4	50	4
Approach Slab	#5	92	3
Approach Footing	#5	80	3

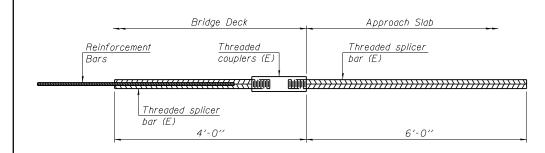

BAR SPLICER ASSEMBLY FOR #5 BAR ON INTEGRAL OR SEMI-INTEGRAL ABUTMENTS

No, required =


1-27-12

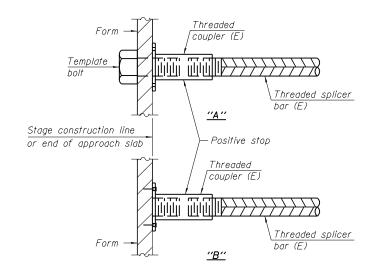

INSTALLATION AND SETTING METHODS


"A" : Set bar splicer assembly by means of a template bolt. "B" : Set bar splicer assembly by nailing to wood forms or cementing to steel forms.

(E) : Indicates epoxy coating.

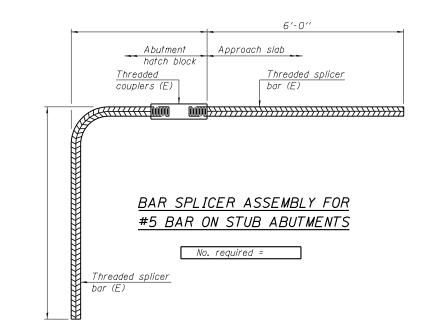

BSD-1

CEC Cummins Engineering Corporation	JOB = 2223.8 FILE = 0150065-74167-17-Splicer.dgn DATE = 7/24/2014	DESIGNED - AAN CHECKED - MDC DRAWN - SJS	REVISED - REVISED - REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	BAR SPLICER ASSEMBLY AND MECHA STRUCTURE NO. 015-
Civil and Structural Engineering		CHECKED - MDC	REVISED -		SHEET NO. 17 OF 17 SHE

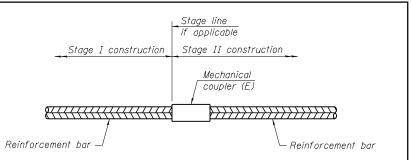

STANDARD MECHANICAL SPLICER

Location	Bar size	No. assemblies required		

<u>NOTES</u>

Splicer bars shall be deformed with threaded ends and have a minimum 60 ksi yield strength.

All reinforcement shall be lapped and tied to the splicer bars. Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars. See Section 508 of the Standard Specifications. See approved list of bar splicer assemblies and mechanical splicers for alternatives.

CHANICAL SPLICER DETAILS	F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
015-0065	673	2BR	COLES	24	24
013-0005			CONTRAC	T NO.	74167
7 SHEETS		ILLINOIS FED.	AID PROJECT		