


1 MANHOLES TO BE ADJUSTED WITH TYPE 8 GRATE  
 EXISTING MANHOLE, OPEN LID  
 STA. 650+62.28, 33.16 LT (FROM NB IL 105)  
 RIM ELEV. = 630.75 (RIM ELEV. = 630.23)  
 12" N (LT) = 625.77  
 24" N (RT) = 616.59  
 18" SE = 616.59  
 12" SW = 623.15  
 12" NW = 625.29

4 MANHOLES TO BE ADJUSTED WITH TYPE 8 GRATE  
 EXISTING CATCH BASIN (RIM ELEV. = 630.35)  
 STA. 651+73.32, 36.31 LT (FROM NB IL 105)  
 RIM ELEV. = 631.20  
 24" N = 616.17  
 12" E = 626.47  
 24" S = 616.17  
 12" W = 626.02

2 INLETS TO BE ADJUSTED (SPECIAL)  
 EXISTING INLET, TYPE B (CURB INLET)  
 STA. 650+99.03, 32.21 RT (FROM SB IL 105)  
 RIM ELEV. = 630.32 (RIM ELEV. = 630.32)

5 INLETS TO BE ADJUSTED  
 STA. 653+12.28, 14.60 RT (FROM SB IL 105)  
 RIM ELEV. = 630.62 (RIM ELEV. = 630.69)  
 BOTTOM ELEV. = 627.19

3 INLETS TO BE ADJUSTED (SPECIAL)  
 EXISTING INLET, TYPE A (CURB INLET)  
 STA. 651+71.80, 22.61 RT (FROM SB IL 105)  
 RIM ELEV. = 630.50 (RIM ELEV. = 630.50)  
 12" E = 627.95

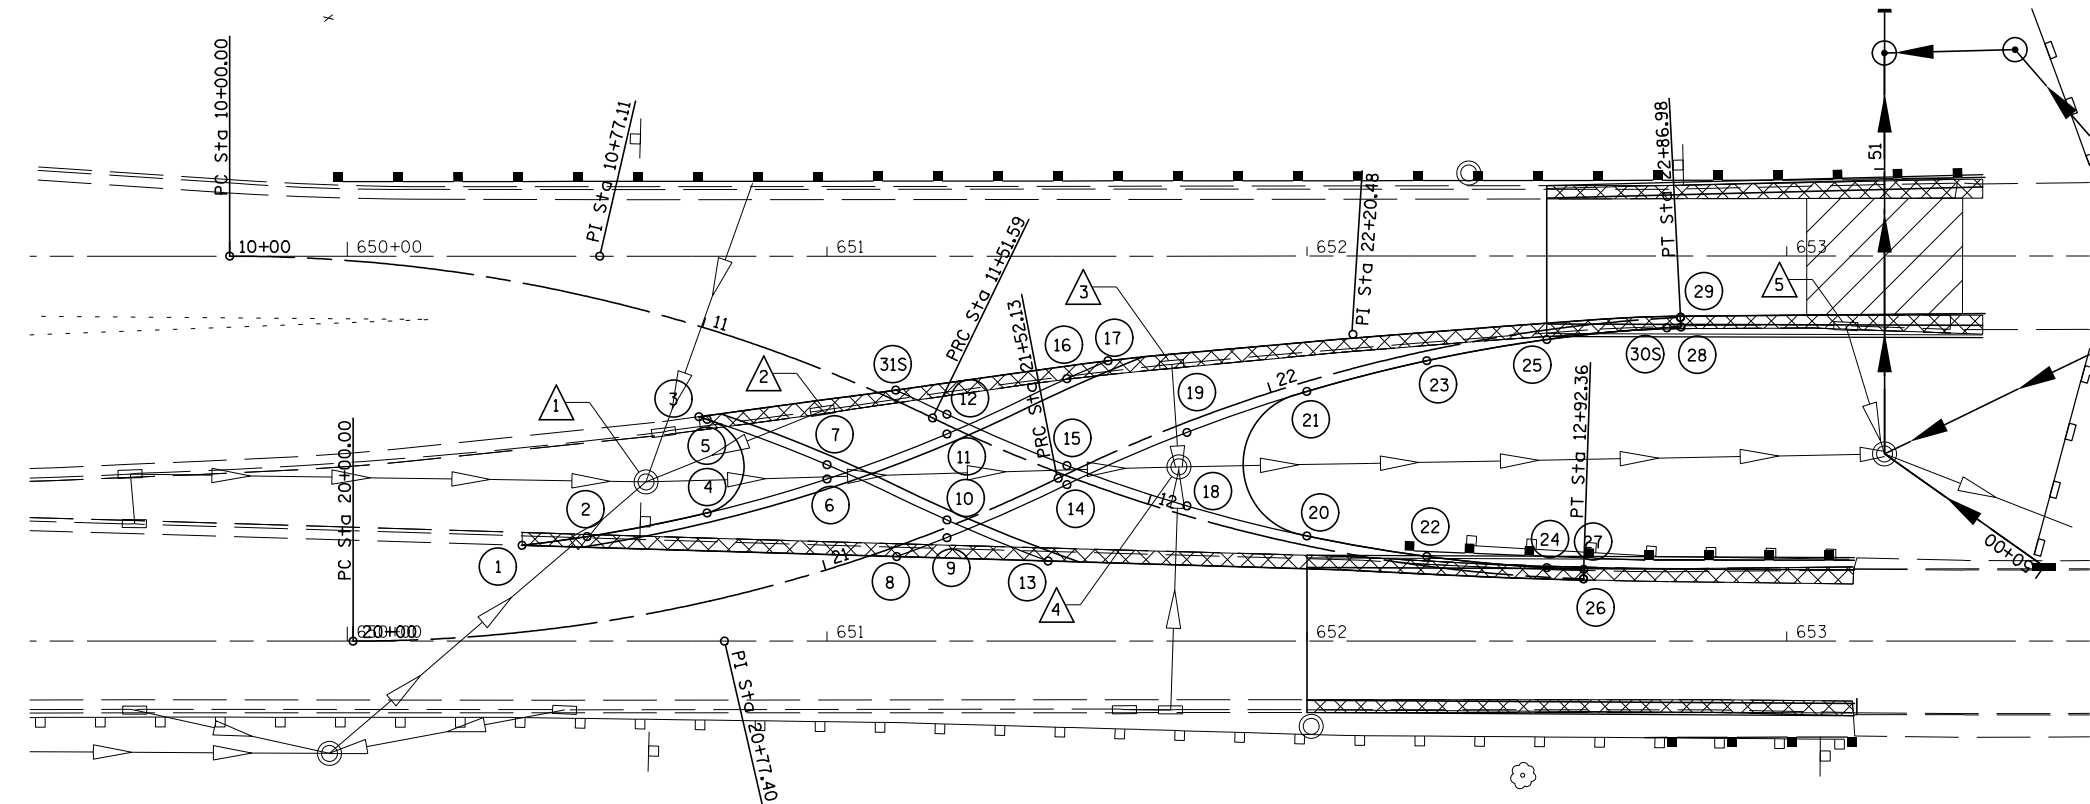

LOCATION	STATION	OFFSET	ELEVATION
1	650+36.44	20.0' LT	630.53
2	650+50.00	21.8' LT	630.52
3	650+73.30	46.8' LT	630.26
4	650+75.00	26.7' LT	630.50
5	650+75.00	46.2' LT	630.27
6	651+00.00	33.8' LT	630.47
7	651+00.00	36.8' LT	630.41
8	651+14.51	17.6' LT	630.64
9	651+25.00	21.6' LT	630.58
10	651+25.00	25.3' LT	630.55
11	651+25.00	43.2' LT	630.51
12	651+25.00	47.3' LT	630.53
13	651+46.08	16.7' LT	630.66
14	651+50.00	32.6' LT	630.54
15	651+50.00	36.6' LT	630.55
16	651+50.00	54.7' LT	630.64
17	651+58.56	58.4' LT	630.68
18	651+75.00	28.2' LT	630.58
19	651+75.00	43.5' LT	630.60
20	652+00.00	21.9' LT	630.60
21	652+00.00	52.0' LT	630.66
22	652+25.00	17.6' LT	630.62
23	652+25.00	58.4' LT	630.71
24	652+50.00	15.3' LT	630.64
25	652+50.00	62.8' LT	630.77
26	652+57.70	13.0' LT	630.65
27	652+57.70	15.0' LT	630.65
28	652+77.95	65.5' LT	630.83
29	652+77.83	67.7' LT	630.84
30S	652+75.00	65.3' LT	630.82
31S	651+14.32	52.3' LT	630.52

LEGEND  
 COMBINATION CURB AND GUTTER REMOVAL

PROP. CURVE XOVC1  
 PI STA. = 10+77.11  
 P.T. STA = 11+51.59  
 P.C. STA = 10+00.00  
 E = 8.76'  
 L = 151.59'  
 T = 77.11'  
 R = 335.00'  
 D = 17° 06' 12"  
 Δ = 25° 55' 34" (RT)

PROP. CURVE XOVC2  
 PI STA. = 12+23.03  
 Δ = 24° 04' 33" (LT)  
 D = 17° 06' 12"  
 R = 335.00'  
 T = 71.44'  
 L = 140.77'  
 E = 7.53'  
 P.C. STA = 11+51.59  
 P.T. STA = 12+92.36

PROP. CURVE XOVC3  
 PI STA. = 20+77.40  
 Δ = 26° 01' 08" (LT)  
 D = 17° 06' 12"  
 R = 335.00'  
 T = 77.40'  
 L = 152.13'  
 E = 8.83'  
 P.C. STA = 20+00.00  
 P.T. STA = 21+52.13

PROP. CURVE XOVC4  
 PI STA. = 22+20.48  
 Δ = 23° 03' 48" (RT)  
 D = 17° 06' 12"  
 R = 335.00'  
 T = 68.35'  
 L = 134.85'  
 E = 6.90'  
 P.C. STA = 21+52.13  
 P.T. STA = 22+86.98

