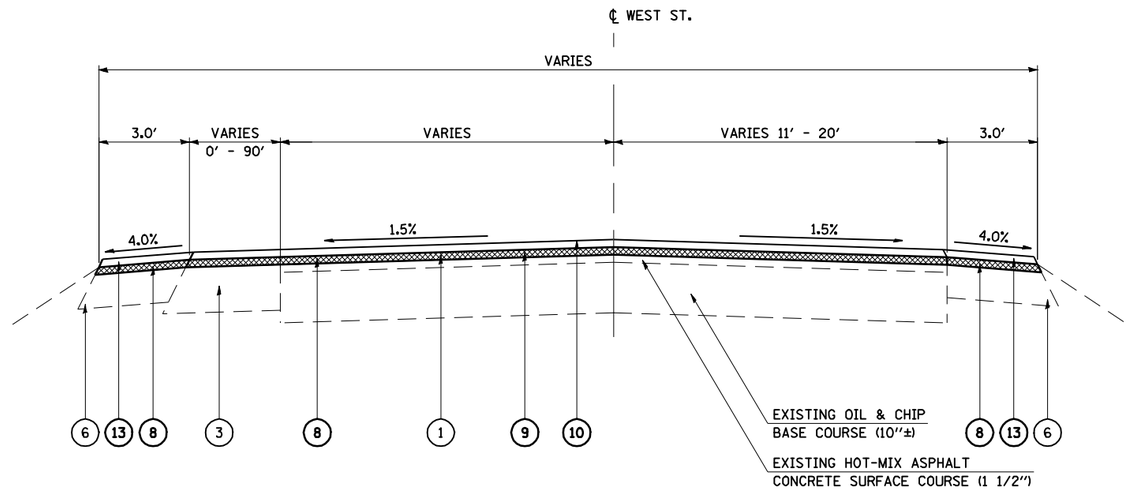

WEST STREET

STA. 0+28.33 - 2+85.00

LEGEND

(1) EXISTING HOT-MIX ASPHALT CONCRETE SURFACE COURSE, MIX "D", CLASS I, TY 2 (1 1/2")

(1A) EXISTING HOT-MIX ASPHALT CONCRETE SURFACE (3±")

(2) EXISTING CONCRETE PAVEMENT (9-6 1/2-9)

(3) EXISTING HOT-MIX ASPHALT WIDENING

(4) EXISTING CONCRETE GUTTER TY A

(5) EXISTING CONCRETE GUTTER TY B

(6) EXISTING HOT-MIX ASPHALT SHOULDER

(7) EXISTING AGGREGATE SHOULDER TY B

(8) PROPOSED HOT-MIX ASPHALT SURFACE REMOVAL (VARIABLE DEPTH)

(9) PROPOSED LEVELING BINDER (MACHINE METHOD) 3/4"

(10) PROPOSED HOT-MIX ASPHALT SURFACE COURSE, MIX "C", 1 1/2"

(11) PROPOSED AGGREGATE SHOULDERS TY B

*** **(12) PROPOSED PAVEMENT MARKING, LINE (5")**

(13) PROPOSED HOT-MIX ASPHALT SHOULDER, 2 1/4"

*** **NOTE: STRIPE LANES AT 12′**

FILE NAME = c:\pw_work\PWIDOT\LAUGHLINRL\d0120394\D572C66-sht-typical.dgn	USER NAME = laughlinrl	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TYPICAL SECTIONS			F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					753	128XRS-3	MORGAN	26	12
	PLOT SCALE = 10.0000 ′ / IN.	CHECKED -	REVISED -							CONTRACT NO. 72C66		
	PLOT DATE = Mar-29-2010 10:07:28AM	DATE -	REVISED -		SCALE:	SHEET NO. 12 OF 26 SHEETS	STA. TO STA.		ILLINOIS	FED. AID PROJECT		