
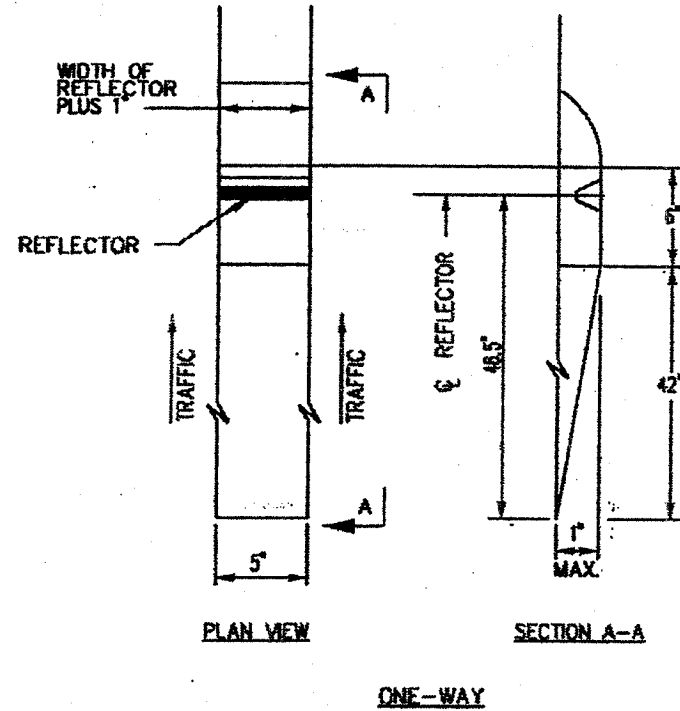


F.A.P. RTE.	SECTION	COUNTY	SHEETS	SHEET NO.
533	2004-117 RS	MCHENRY	26	16
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

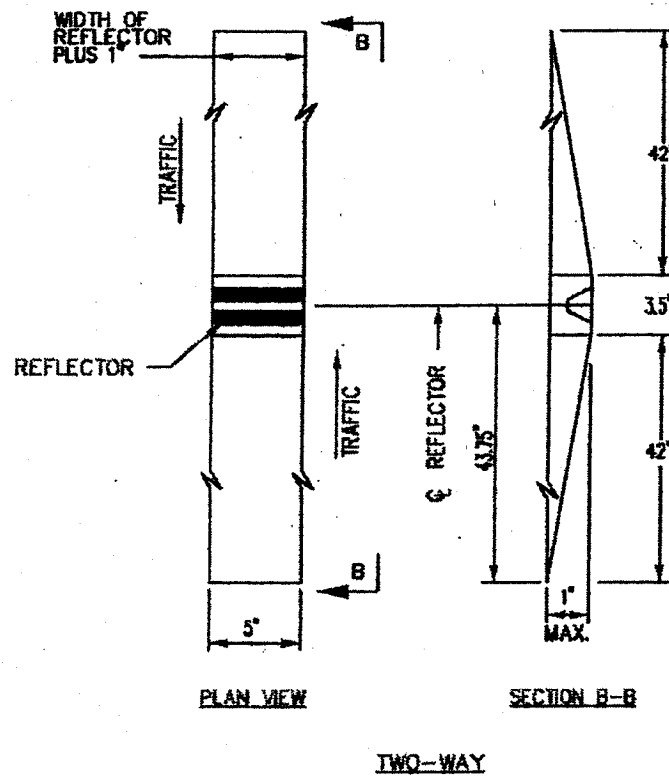

GENERAL NOTES:

1. Installation shall conform to IDOT Highway Standard 781001-02 (or latest) for marker placement.
2. IDOT Standard 781001-02 shall be modified to reflect recessed pavement markers instead of raised pavement markers.

RECESSED REFLECTIVE PAVEMENT MARKERS

INSTALLATION NOTES:

1. Saw cut to dimensions shown.
2. Sawcut areas to be dry and free of material that adversely affects the adhesive bond.
3. Install the reflector with an approved two-component epoxy adhesive. Epoxy should not obscure or block the lens.
4. Install top of reflector 1/2 to 1/4 inch below the pavement surface.
5. Reflector shall be 3M Series 190.

TYPICAL
RECESSED REFLECTIVE
PAVEMENT MARKERS
STANDARD KC781001-03