




F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
6711	00-00164-00-SP	TAZEWELL	80	57
STA. _____ TO STA. _____		ILLINOIS FED. AID PROJECT		

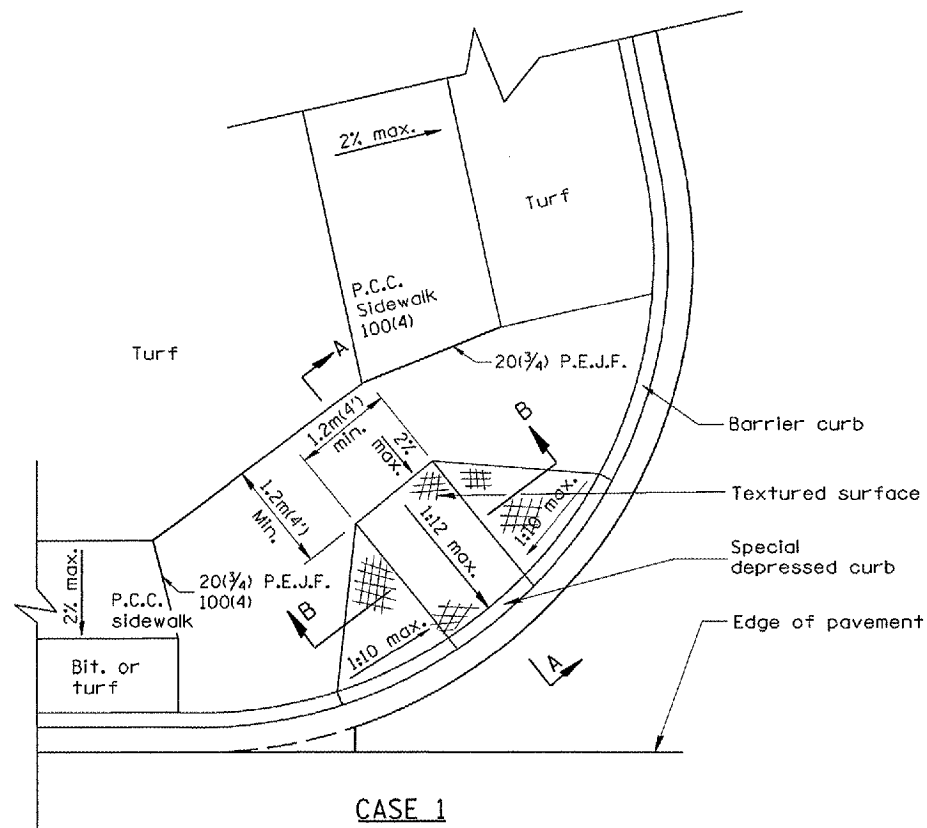


CASE 1
TYPE B RAMP WITH 1.2m(4') OR MORE AT BACK OF RAMP

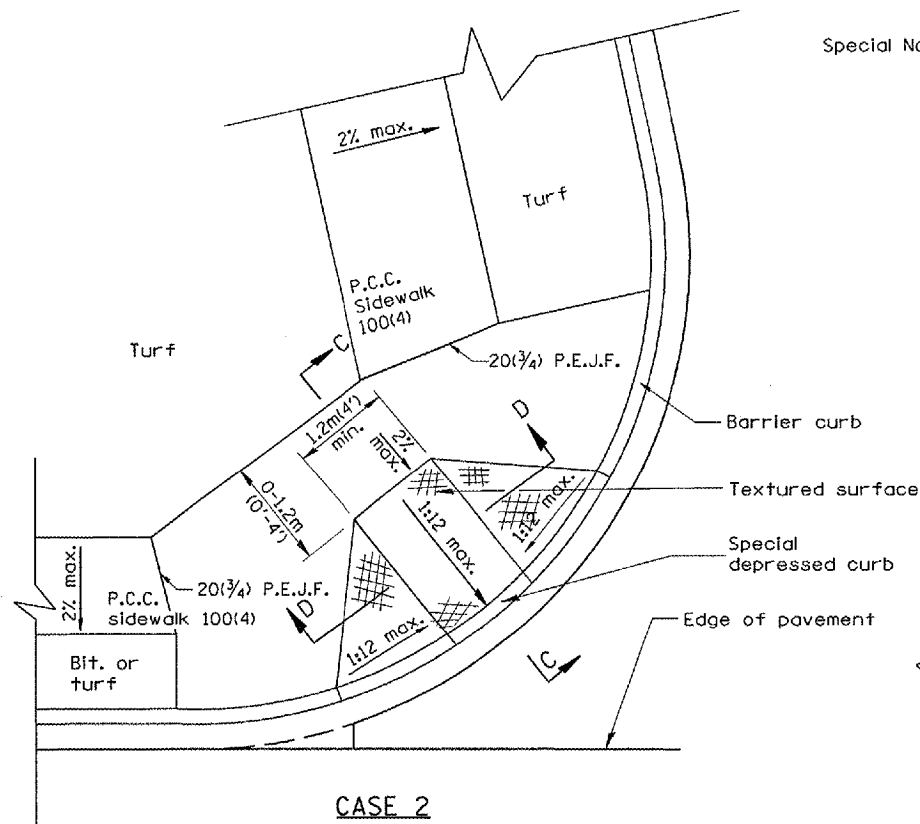


CASE 2
TYPE B RAMP WITH LESS THAN 1.2m(4') AT BACK OF RAMP

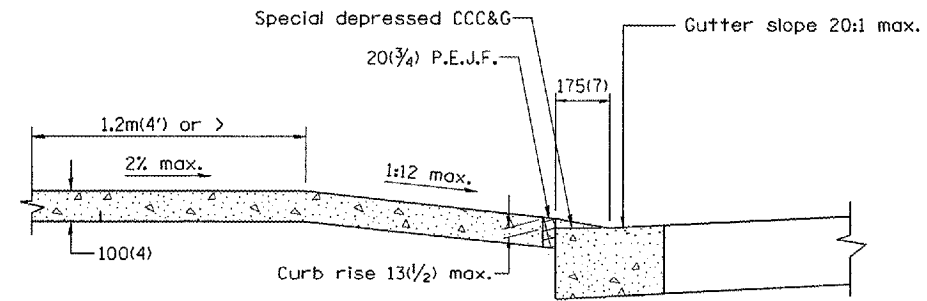


SEC. A-A

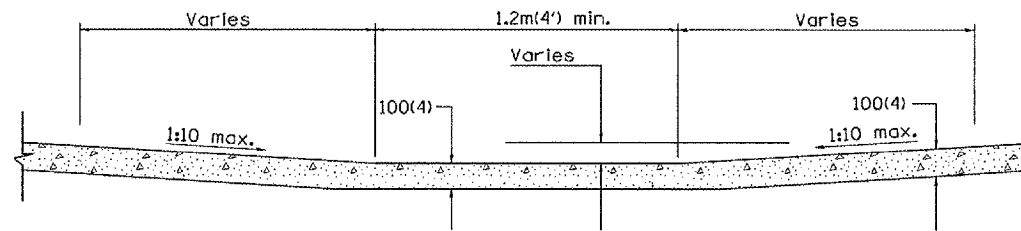

SEC. B-B

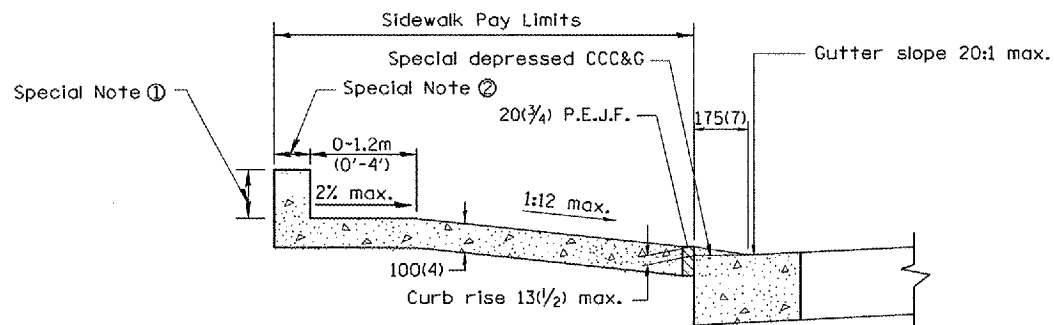

SEC. C-C

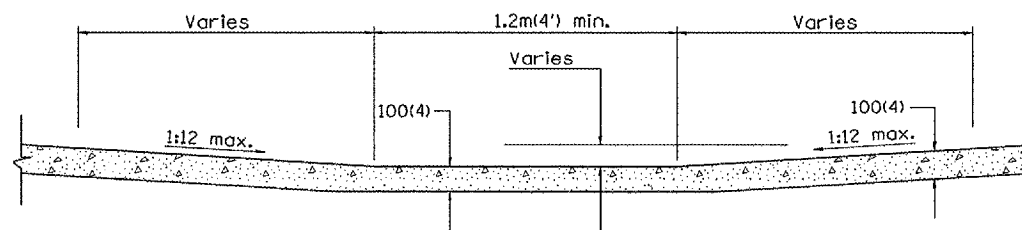

SEC. D-D

GENERAL NOTES

1. Refer to State Standard 424001 for texturing and other design elements.
2. The controls shown on this standard are applicable to Type B Curb and Combination Concrete Curb & Sidewalk construction.
3. The maximum length of texturing shall be 1.8m(6') unless otherwise shown.

All dimensions are in millimeters (inches) unless otherwise noted.

SPECIAL NOTES

- 1 Variable height edge treatment as required to match existing conditions. Maximum height = 225(9)
- 2 100(4) wall to be built outside of plan sidewalk width, if ROW allows.

