
## STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

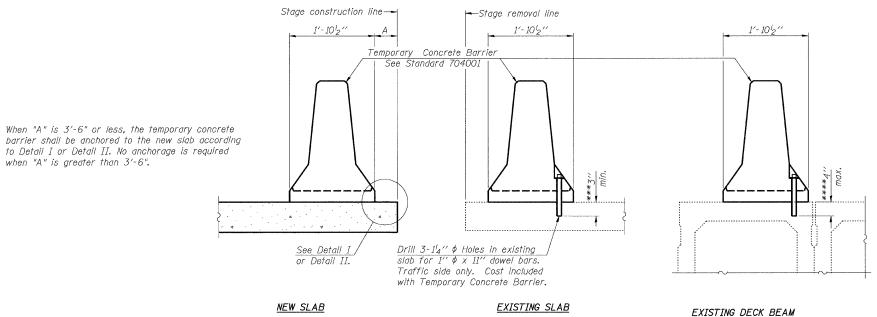

## NOTES

Detail I - With Bar Splicer or Couplers: Connect one (1) 1"x7"x10" steel P to the top layer of couplers with 2-58" \$\phi\$ bolts screwed to coupler at approximate © of each barrier panel.

Detail II - With Extended Reinforcement Bars:


Connect one (1) 1"x7"x 10" steel P to the concrete slab or concrete wearing surface with 2- $^{5}8^{\prime\prime}$   $\phi$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate € of each barrier panel.

Cost of anchorage is included with Temporary Concrete Barrier. The 1" x 7" x 10" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.


## SECTIONS THRU SLAB OR DECK BEAM


\*\*\* Dimension shown is minimum required embedment into concrete. If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.

\*\*\*\* If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

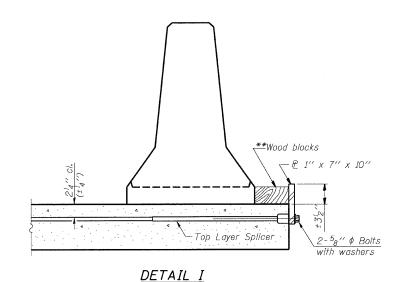

when "A" is greater than 3'-6".

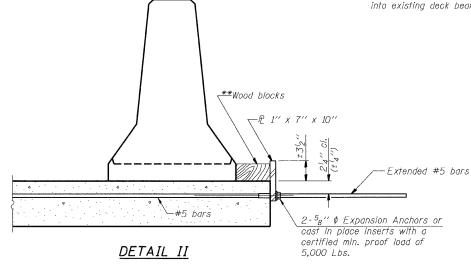



STEEL RETAINER P 1" x 7" x 10"

\* Required only with Detail II

\*\*Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

TEMPORARY CONCRETE BARRIER FOR STAGE CONSTRUCTION STRUCTURE NO. 058-0014

COUNTY

MACON

TOTAL SHEET NO.

73

79

CONTRACT NO. 74215



	Foth Infrastructure & Environment, LLC 16/10 Broadmoor Drive Champaign, 16/1821 Phone: 217-352-4088 Illinois Registration Number 184-004913	SHEET NO.47	F.A. RTE		SECTION					COUNT	
			710	)	(50Z-VB)BR					MACON	
										CONTRA	
			FED.	ROAD	DIST.	NO.	ILLINOIS	FED.	AII	PROJECT	