

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

EAST EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
N. Edge of S. Appr. Slab	376+33.25	-18.00	542.99
A3	376+43.25	-18.00	542.94
A4	376+53.25	-18.00	542.88
S. Edge of S. Appr. Slab	376+63.25	-18.00	542.82

EAST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
N. Edge of S. Appr. Slab	376+38.28	-12.00	543.09
A3	376+48.28	-12.00	543.03
A4	376+58.28	-12.00	542.97
S. Edge of S. Appr. Slab	376+68.28	-12.00	542.90

℄ ROADWAY, PGL & STAGE CONSTR. LINE


Location	Station	Offset	Theoretical Grade Elevations
N. Edge of S. Appr. Slab	376+48.35	0.00	543.22
A3	376+58.35	0.00	543.16
A4	376+68.35	0.00	543.09
S. Edge of S. Appr. Slab	376+78.36	0.00	543.01

WEST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
N. Edge of S. Appr. Slab	376+58.42	12.00	542.97
A3	376+68.42	12.00	542.90
A4	376+78.42	12.00	542.82
S. Edge of S. Appr. Slab	376+88.42	12.00	542.74

WEST EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
N. Edge of S. Appr. Slab	376+63.45	18.00	542.81
A3	376+73.45	18.00	542.74
A4	376+83.45	18.00	542.66
S. Edge of S. Appr. Slab	376+93.45	18.00	542.58

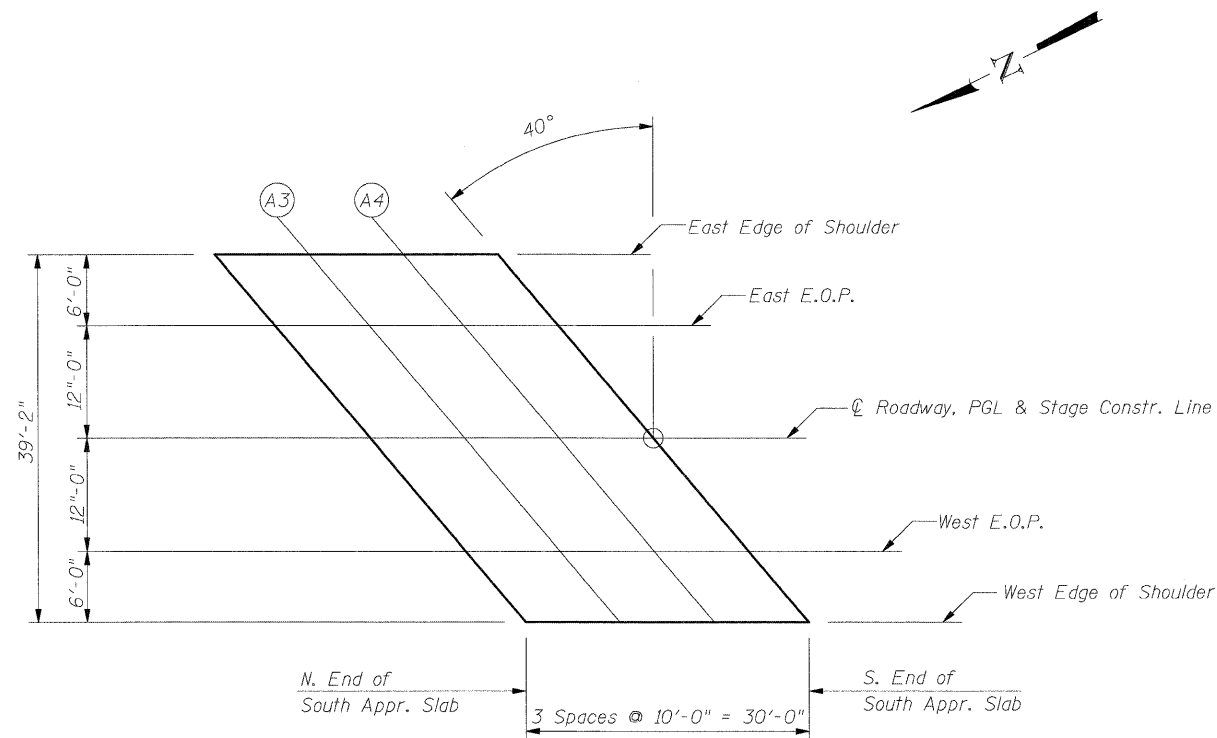

PLAN

TOP OF APPROACH
SLAB ELEVATION
S.N. 018-0064

DESIGNED	SCD
CHECKED	DRB
DRAWN	THW
CHECKED	SCD

E-AS

10-1-08



IE CONSULTANTS, INC
6420 SOUTH SIXTH STREET
SPRINGFIELD, ILLINOIS 62712
TEL. (217) 529-8027
FAX (217) 529-4543
WWW.IE-CONSULTANTS.COM

SHEET NO.	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
10 OF 33 SHEETS	116	(112BR1)B	CUMBERLAND	72	41
CONTRACT NO. 74236					
FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT					