



Plate A shall be placed between rail element and block-out at non-splice mounting points only when steel block-outs are used.

NOTE


## PLATE A



STEEL BLOCK-OUT DETAIL

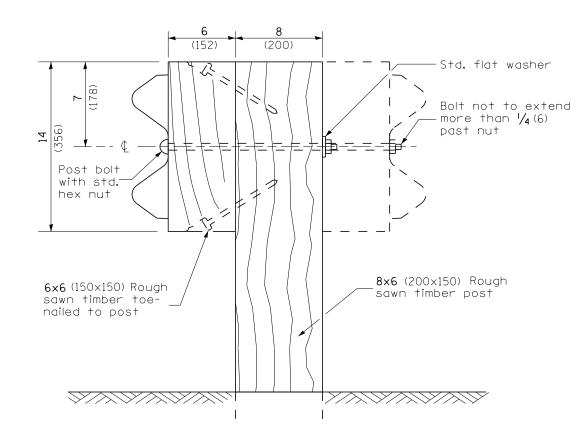

## WOOD POST CONSTRUCTION

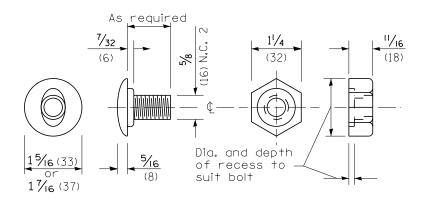

POST OR SPLICE BOLT & NUT

All dimensions are in inches (millimeters) unless otherwise noted.

			RTE. SECTION COUNTY S	SHEETS NO.
	STATE OF ILLINOIS	REMOVE AND REERECT STEEL PLATE BEAM GUARDRAIL	90-[14R;(14HB-4,14,14HVB)BR] TAZEWELL	2433 2123
	DEPARTMENT OF TRANSPORTATION	SHT. 2 OF		NO. 68620
		NOT TO SCALE CADD STD. 630011-	D4 FED. ROAD DIST. NO.   ILLINOIS FED. AID PROJECT	