


PIPE UNDERDRAINS 4"					PIPE UNDERDRAIN 4" SPECIAL	CONC HEADWALL FOR PIPE DRAIN EACH
LOCATION FAP 310	SOUTHBOUND LT.		NORTHBOUND RT.			
	OUTSIDE	MEDIAN	MEDIAN	OUTSIDE		
91+50 TO 94+49	299'				27'	1
91+50 TO 98+35		685'			31'	2
92+50 TO 98+37				587'	14'	1
92+50 TO 102+37			987'		30'	2
94+49 TO 98+17	367'				27'	1
102+39 TO 106+38			399'		16'	1
104+77 TO 106+40	173'				15'	1
106+30 TO 108+83				253'		
106+40 TO 107+93		153'				
107+42 TO 112+95			553'			
107+96 TO 112+91		495'			15'	1
109+52 TO 111+94	242'					
112+95 TO 117+45		450'			46'	3
113+05 TO 117+45			440'		15'	1
117+55 TO 122+50		495'	495'		14'	1
120+28 TO 122+50	222'				15'	1
122+50 TO 126+95	440'	440'	440'		44'	3
126+50 TO 131+50				500'	15'	1
127+06 TO 131+50	444'	444'	444'		45'	3
131+57 TO 135+47	390'	390'	390'	390'	60'	4
135+57 TO 139+50	393'	393'	393'	393'	60'	4
139+56 TO 142+95		339'	339'	339'	45'	3
139+56 TO 143+51	395'				14'	1
143+04 TO 147+45		441'	441'	441'	45'	3
143+56 TO 147+45	389'				15'	1
147+55 TO 149+45				190'	15'	1
149+50 TO 154+50	500'	500'	500'	500'	60'	4
154+55 TO 159+45	490'	490'	490'	490'	60'	4
160+99 TO 164+98			399'	399'	30'	2

LOCATION FAP 310	SOUTHBOUND LT.		NORTHBOUND RT.		PIPE UNDERDRAIN 4" SPECIAL	CONC HEADWALL FOR PIPE DRAIN EACH
	OUTSIDE	MEDIAN	MEDIAN	OUTSIDE		
161+42 TO 165+42	400'	400'			30'	2
177+55 TO 186+95	940'	940'	940'	940'	120'	8
187+06 TO 189+94	288'	288'			15'	1
187+06 TO 192+95			589'		15'	1
190+05 TO 192+95	290'	290'			15'	1
193+05 TO 196+70	365'	365'	365'		45'	3
196+75 TO 201+50	475'	475'	475'		45'	3
203+55 TO 209+34	579'	579'	579'	579'	60'	4
209+39 TO 214+45	506'	506'	506'	506'	60'	4
214+50 TO 219+45	495'	495'	495'	495'	60'	4
219+55 TO 224+00	445'	445'	445'	445'	60'	4
224+05 TO 225+00	95'	95'				
224+50 TO 228+25			420'	420'		
SUB TOTAL	9622'	10593'	11524'	7867'	1298'	85
LOCATION RAMP "B"	OUTSIDE RT	OUTSIDE LT			PIPE UNDERDRAIN 4" SPECIAL	CONC HEADWALL FOR PIPE DRAIN EACH
5+42 TO 6+00	68'					
8+44 TO 11+00	256'				15'	1
11+00 TO 15+00		400'			15'	1
22+00 TO 31+00		900'			30'	2
31+08 TO 40+65	957'				15'	1
41+08 TO 42+46	138'					
SUB TOTAL	1419'	1300'			75'	5
LOCATION RAMP "A"	OUTSIDE RT	OUTSIDE LT			PIPE UNDERDRAIN 4" SPECIAL	CONC HEADWALL FOR PIPE DRAIN EACH
0+00 TO 19+83	1983'				60'	4
LOCATION IL 111	OUTSIDE RT	OUTSIDE LT			PIPE UNDERDRAIN 4" SPECIAL	CONC HEADWALL FOR PIPE DRAIN EACH
1174+31 TO 1179+40	453'	509'			30'	2
LOCATION US 67	OUTSIDE RT	OUTSIDE LT			PIPE UNDERDRAIN 4" SPECIAL	CONC HEADWALL FOR PIPE DRAIN EACH
49+51 TO 56+34	683'	683'			30'	2
TOTAL	46636'				1493'	**

\* PIPE UNDERDRAINS CROSS ROAD 4"

LOCATION IL 111	LT FOOT	RT FOOT	GEO FABRIC SQ YD	CONC HEADWALL EACH	POROUS GRAN BACKFILL CU YD
1173+00 TO 1173+00	62'	72'	15.6	2	10
1175+00 TO 1175+00	37'	37'	8.6	2	6
TOTAL	208		24	102	16

\* SEE SHEET 214 FOR FURTHER DETAIL

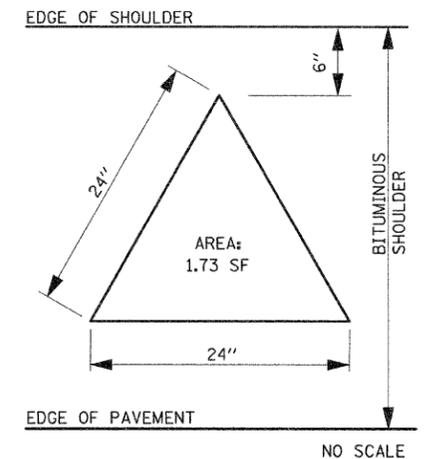

UNDERDRAIN HEADWALL MARKER DETAIL  
24" WHITE THERMOPLASTIC TRIANGLE

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

# UNDERDRAIN TABLES

SCALE: NO SCALE  
DATE: 09-04-09

DRAWN BY: U.J.J.  
CHECKED BY: J.J.C.

\*\* SEE NEXT COLUMN LABELED CONC HEADWALL FOR TOTAL