


TYPICAL SECTIONS


NO SCALE

MAIN LINE

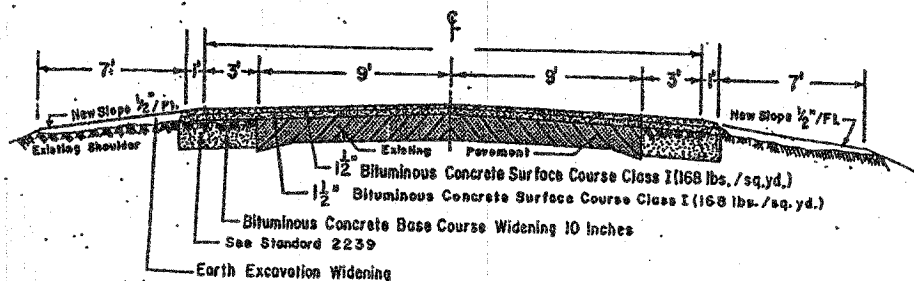

NOTE: The thickness of Bituminous Mixture shown on the plans is the nominal thickness. Deviations from the nominal thickness will be permitted when such deviations occur due to irregularities in the existing base or surface on which the Bituminous Mixture is placed.

BUTT JOINT

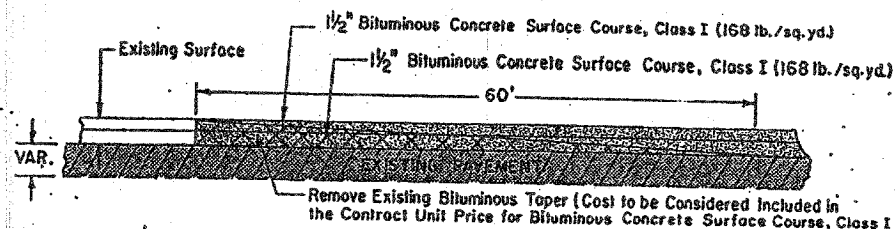

GENERAL NOTES

ENTIRE SECTION INSPECTED AND APPROVED AS TO POLICY.
 DATE MAY 27 1971
 DISTRICT ENGINEER D. E. Swinburn

THE CONTRACTOR SHALL ERECT THE BARRICADES CONFORMING TO STANDARDS 2298 & 2299

AT THE LOCATIONS WHERE EXCAVATION QUANTITIES ON THE PLANS ARE INDICATED AS HAVING BEEN ESTIMATED, THE ENGINEER WILL OBTAIN ORIGINAL AND FINAL CROSS SECTIONS TO DETERMINE PAY QUANTITIES.

WHERE SECTION OR SUBSECTION MONUMENTS ARE ENCOUNTERED, THE ENGINEER SHALL BE NOTIFIED BEFORE SUCH MONUMENTS ARE REMOVED. THE CONTRACTOR SHALL PROTECT AND CAREFULLY PRESERVE ALL PROPERTY MARKS AND MONUMENTS UNTIL THE OWNER, AN AUTHORIZED SURVEYOR OR AGENT HAS WITNESSED OR OTHERWISE REFERENCED THEIR LOCATION.

THE CONTRACTOR SHALL REMOVE ALL DELINEATORS AND GUARD RAIL WHICH ARE NOT TO BE LEFT IN PLACE. UNUSABLE MATERIAL SHALL BE DISPOSED OF BY THE CONTRACTOR AT HIS EXPENSE. SALVAGEABLE MATERIAL SHALL BE STORED ON THE STATE'S RIGHT OF WAY AND SHALL BECOME THE PROPERTY OF THE DIVISION OF HIGHWAYS OF THE STATE OF ILLINOIS.

SUMMARY OF QUANTITIES

ROUTE NO.	SEC.	COUNTY	TOTAL SHEETS	SHEET NO.
SB175	115BR	WINNEBAGO	8	2

CODE NO.	ITEM	CONSTRUCTION TYPE UNIT	CODE X080 QUANTITY
201001	TREE REMOVAL (6 TO 15 INCH DIAMETER)	IN DIA	50
202004*	EARTH EXCAVATION (WIDENING)	CU YD	8
306007	BITUMINOUS CONCRETE BASE COURSE WIDENING 8 INCH	SQ YD	35
406008*	BITUMINOUS CONCRETE SURFACE COURSE CLASS I	TON	88
408005	PORTLAND CEMENT CONCRETE PAVEMENT 10 INCH	SQ YD	33
408013	PAVEMENT FABRIC	SQ YD	33
501016	REMOVAL OF EXISTING SUPERSTRUCTURE	EACH	1
501022	CONCRETE REMOVAL	CU YD	10.4
501026	EXPANSION BOLTS 3/4 INCH	EACH	104.
504003	CLASS X CONCRETE	CU YD	16.6
505001*	PRECAST CONCRETE BRIDGE SLAB	SQ FT	299
505004*	PRECAST PRESTRESSED CONCRETE DECK BEAMS (17" DEPTH)	SQ FT	1261
508012	STEEL RAILING, TYPE #	LIN FT	138
512001	REINFORCEMENT BARS	POUND	2120
620026	PAVEMENT REMOVAL AND PORTLAND CEMENT CONCRETE REPLACEMENT TYPE 2 10 INCH	SQ YD	9.
628001*	STEEL PLATE BEAM GUARD RAIL, SINGLE RAIL	LIN FT	300
628015	TEMPORARY GUARD RAIL	LIN FT	39
633002	WOOD GUARD RAIL REMOVAL	LIN FT	160
646002	ENGINEER'S FIELD OFFICE, TYPE B	EACH	1
X62801*	TERMINAL SECTION SINGLE RAIL	EACH	4
Z10178*	COAL TAR INTERLAYER PROTECTIVE COAT	SQ YD	158
-XZ1014*	TRAFFIC CONTROL & PROTECTION STANDARD 2309	EACH	1

* SEE SPECIAL PROVISIONS

SCHEDULE OF QUANTITIES

TREE REMOVAL (6-15 INCH DIAMETER)	ENTIRE SECTION	50	IN DIA
EARTH EXCAVATION (WIDENING)	ENTIRE SECTION	8	CU YDS
BITUMINOUS CONCRETE BASE COURSE WIDENING 8"	ENTIRE SECTION	35	SQ YDS
BITUMINOUS CONCRETE SURFACE COURSE, CLASS I	BRIDGE DECK	16	
	MAINLINE	72	
	TOTAL	88	TONS
STEEL PLATE BEAM GUARD RAIL, SINGLE RAIL	ENTIRE SECTION (4 AT 75')	300	LIN FT
WOOD GUARD RAIL REMOVAL	ENTIRE SECTION (4 AT 40')	160	LIN FT
ENGINEER'S FIELD OFFICE, TYPE B	ENTIRE SECTION	1	EACH
TERMINAL SECTION, SINGLE RAIL	ENTIRE SECTION (1 @ each end = 4)	4	EACH
TRAFFIC CONTROL & PROTECTION STANDARD 2309	ENTIRE SECTION	1	EACH

FOR INFORMATION ONLY