


TEMP. DITCH CHECK SPACING		
SLOPE (%)	HEIGHT AT CENTER OF DITCH CHECK (OVERFLOW PT) (INCHES)	SPACING OF DITCH CHECK (FEET)
8.0	12"	10
	18"	20
	24"	25
7.0	12"	15
	18"	20
	24"	30
6.0	12"	15
	18"	25
	24"	35
5.0	12"	20
	18"	30
	24"	40
4.0	12"	25
	18"	35
	24"	50
3.0	12"	35
	18"	50
	24"	65
2.0	12"	50
	18"	75
	24"	100
1.0 & UNDER	12"	100
	18"	150
	24"	195

EROSION CONTROL KEY

- INLET AND PIPE PROTECTION
- PERIMETER EROSION BARRIER
- TEMPORARY DITCH CHECK
- EROSION CONTROL BLANKET
- RIP-RAP (CLASS INDICATED IN SCHEDULE)

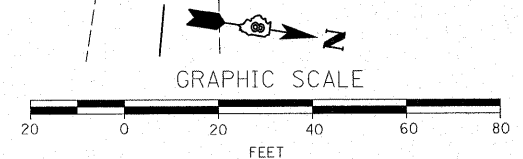

FILE NAME = 0876830-shr-eros-swppp.dgn	USER NAME = cha	DESIGNED -	REVISED -
		DRAWN -	REVISED -
	PLOT SCALE = 1:20	CHECKED -	REVISED -
	PLOT DATE = 8/24/2009	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

EROSION CONTROL PLAN			
SCALE: 1:20	SHEET NO. OF SHEETS	STA. 134+00.00 TO STA. 140+00.00	

F.A. RTE. 600	SECTION 60-130.31.128-1	COUNTY	TOTAL SHEETS 399	SHEET NO. 144
FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT		
CONTRACT NO. 76830				