


TEMP. DITCH CHECK SPACING

SLOPE (%)	HEIGHT AT CENTER OF DITCH CHECK (OVERFLOW PT) (INCHES)	SPACING OF DITCH CHECK (FEET)
8.0	12"	10
	18"	20
	24"	25
7.0	12"	15
	18"	20
	24"	30
6.0	12"	15
	18"	25
	24"	35
5.0	12"	20
	18"	30
	24"	40
4.0	12"	25
	18"	35
	24"	50
3.0	12"	35
	18"	50
	24"	65
2.0	12"	50
	18"	75
	24"	100
1.0	12"	100
	18"	150
	24"	195
& UNDER		

- EROSION CONTROL KEY**
- INLET AND PIPE PROTECTION
 - PERIMETER EROSION BARRIER
 - TEMPORARY DITCH CHECK
 - EROSION CONTROL BLANKET
 - RIP-RAP (CLASS INDICATED IN SCHEDULE)

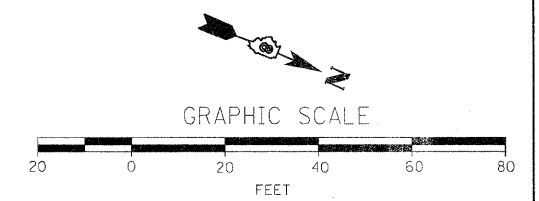

FILE NAME =	USER NAME = #USER#	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	EROSION CONTROL PLAN			F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
#FILE#S		DRAWN -	REVISED -		600	60-(30.31.128)-1		399	146			
	PLOT SCALE = #SCALE#	CHECKED -	REVISED -		SCALE: 1:20			CONTRACT NO. 76830				
	PLOT DATE = #DATE#	DATE -	REVISED -		SHEET NO. OF SHEETS	STA. 145+50.00 TO STA. 151+00.00	FED. ROAD DIST. NO. [ILLINOIS] FED. AID PROJECT					