


- KEY**
- ✕ TREES TO BE REMOVED
  - AS 2-1/2" TREE, ACER SACCHARUM (SUGAR MAPLE), 2-1/2" CALIPER, BALLED AND BURLAPPED
  - OP 2-1/2" TREE, QUERCUS PALUSTRIS (PIN OAK), 2-1/2" CALIPER, BALLED AND BURLAPPED
  - OR 2-1/2" TREE, QUERCUS RUBRA (RED OAK), 2-1/2" CALIPER, BALLED AND BURLAPPED
  - CC 2" TREE, CERCIS CANADENSIS (EASTERN REDBUD), 2" CALIPER, TREE FORM, BALLED AND BURLAPPED
  - MS 2" TREE, MALUS SNOWDRIFT (SNOWDRIFT CRAB APPLE), 2" CALIPER, TREE FORM, BALLED AND BURLAPPED
  - PS 3" EVERGREEN, PINUS STROBUS (EASTERN WHITE PINE), 3" CALIPER, BALLED AND BURLAPPED

- NOTES:**
1. TYPICAL TREE SPACING IS 20' X 20'.
  2. TREES SHALL NOT BE LOCATED WITHIN 10' OF ANY UNDERGROUND UTILITY.
  3. TREES SHALL NOT BE PLACED ON SLOPES STEEPER THAN 3:1.

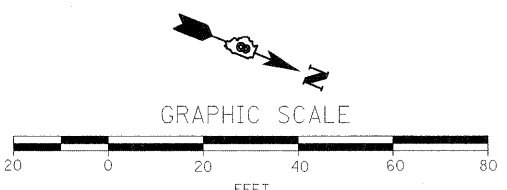

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**LANDSCAPE PLAN**

FILE NAME =	USER NAME = default	DESIGNED -	REVISED -
P:\Projects\51350\1\CAD\DRAWING\876830-shd	Indscp.dgn	DRAWN -	REVISED -
	PLOT SCALE = 20,000.0' / IN.	CHECKED -	REVISED -
	PLOT DATE = 4/30/2010	DATE -	REVISED -

SCALE: 1:20 SHEET NO. OF SHEETS STA. 151+00.00 TO STA. 157+00.00

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
600	60-(30,31,128)-1		399	238
CONTRACT NO. 76830				
FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT		